


Key Features:

- Frequency range: 4.0~5.5GHz, bandwidth up to 100MHz
- N type connectors, male input, female output
- Integrated reverse termination with heat sink
- Power handling +150 Watts Forward and Reverse
- Customer specify center frequency and bandwidth

Electrical Specifications

Part No.	Freq Range MHz	Insertion Loss, dB	Reverse Isolation, dB	VSWR	Forward Power, Watts	Reverse Power Watts	Temp. Range, °C
F2135-0500-01	4.98-5.02	0.5 Max	≥ 23	≤ 1.2	≥ 150	>150	-20 ~ +70

Mechanical Structure:

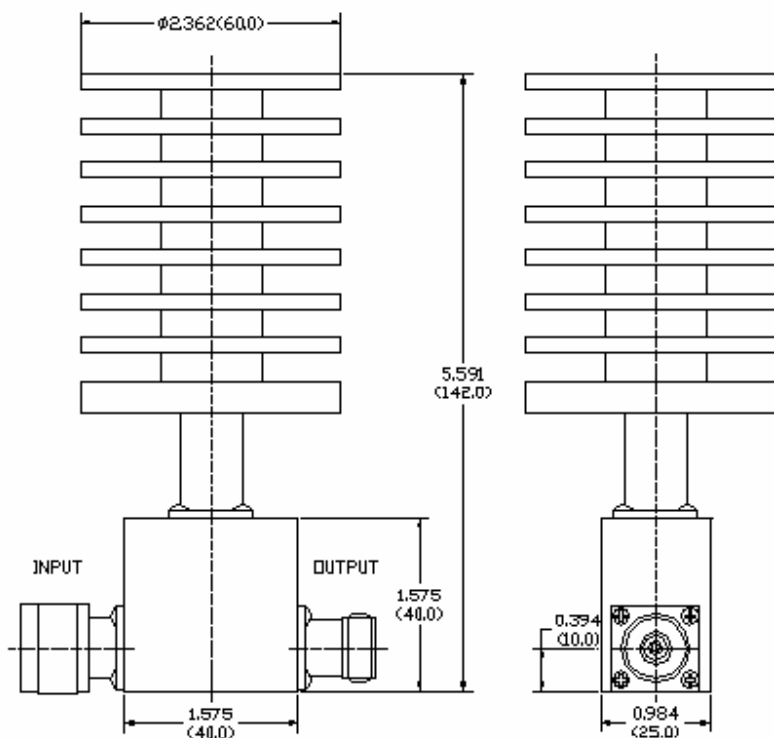

Ordering Information:

Note: All units are in inches.

