



## MATERIALS

LOCK NUT	BRASS GOLD PLATED
BUSHING	BRASS
CONTACT	BRASS
INSULATOR	PLASTIC
CAP	PLASTIC

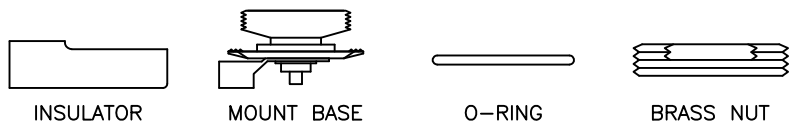


## ASSEMBLY PROCEDURES


1. TRIM CABLE JACKET AND DIELECTRIC TO DIMENSION AS SHOWN.

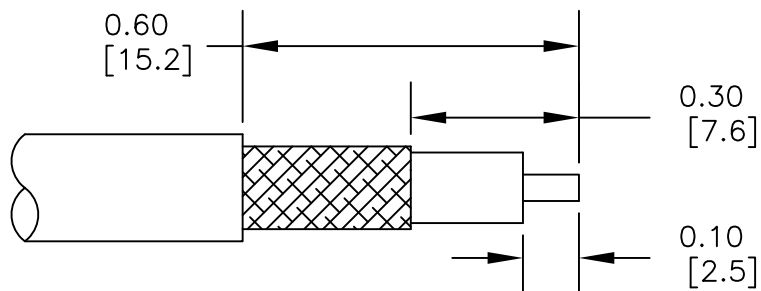



2. SLIDE INSULATOR THROUGH CABLE.





3. SOLDER INNER CONDUCTOR TO CENTER CONTACT AND OUTER CONDUCTOR TO OUTER CONDUCTOR TERMINAL.

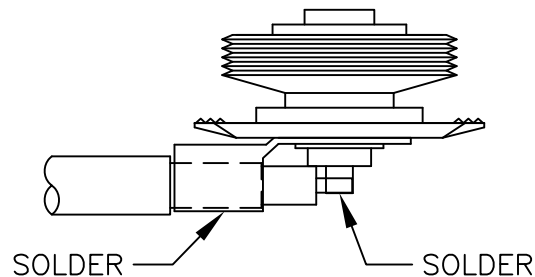

4. SLIDE INSULATOR TO COVER CENTER CONDUCTOR.

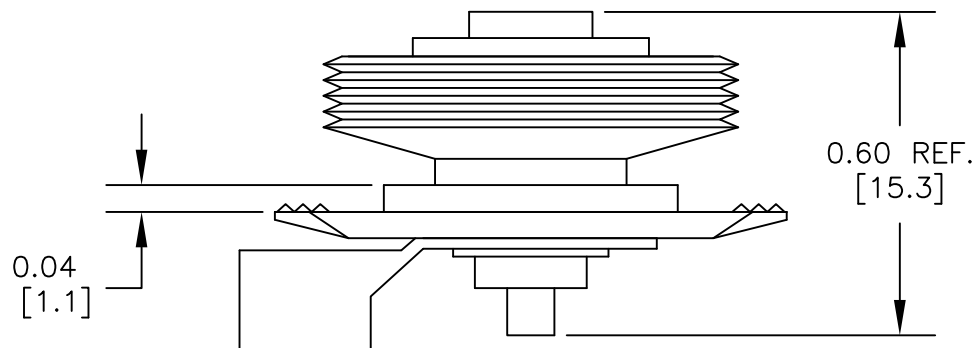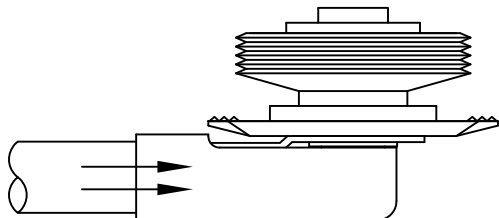

BUSHING ASSEMBLY

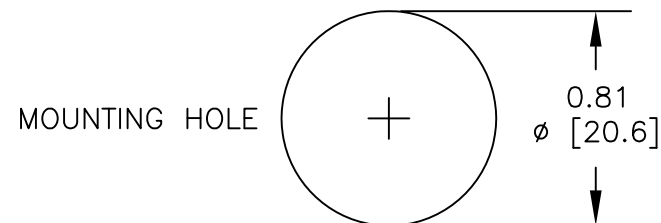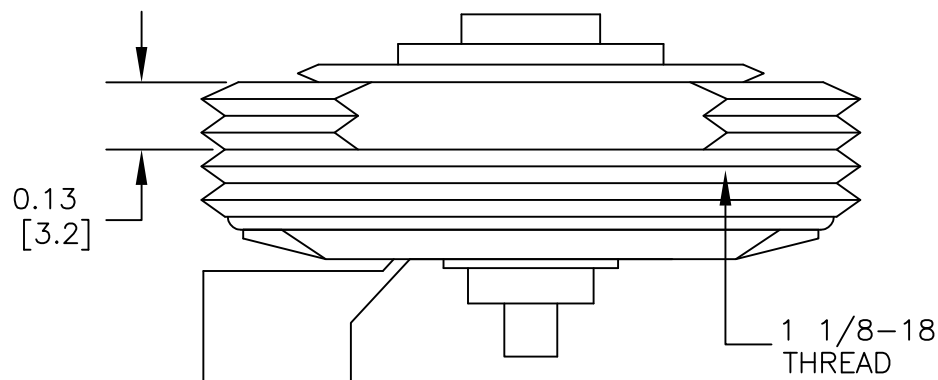

MOUNTING HOLE



PASTERNAK ENTERPRISES, INC.

P.O. BOX 16759, IRVINE, CA 92623  
PHONE (949) 261-1920 FAX (949) 261-7451

WEB ADDRESS: [www.pasternack.com](http://www.pasternack.com)  
E-MAIL ADDRESS: [sales@pasternack.com](mailto:sales@pasternack.com)

COAXIAL & FIBER OPTICS

DWG TITLE

**PE51021**

DES.

NMO Mount, no cable or connector  
Frequency: DC - 1000 MHz

REV. D

FSCM NO. 53919

CAD FILE 051412

SCALE N/A

SIZE A

2233

### NOTES:

1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].
4. FITS MIL-C-17 AND EQUIVALENT CABLES.