
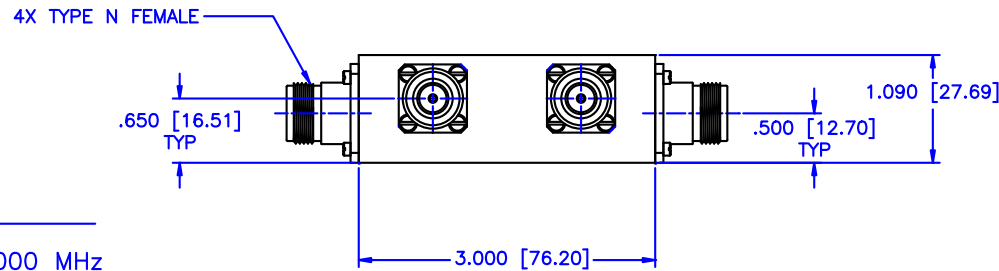


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

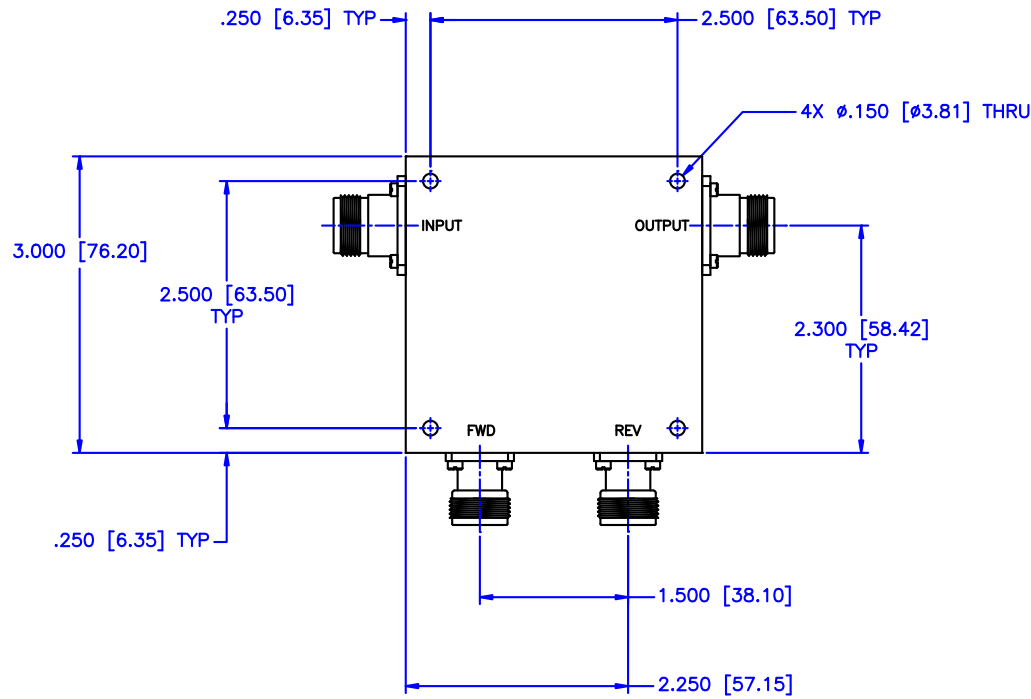

**SPECIFICATIONS:**

- FREQUENCY RANGE: 500–1000 MHz
- COUPLING: 30dB
- FLATNESS:  $\pm 0.25$ dB
- INSERTION LOSS: 0.20dB Max.
- DIRECTIVITY: 20dB Min.
- VSWR PRIME LINE: 1.15:1 Max.
- POWER: 500 Watts CW

MATERIAL:		<b>MCLI</b> MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE: N/A
			SHEET: N/A
DRAWING TITLE:		HIGH POWER DUAL DIRECTIONAL COUPLER	
PART NO.:		HDL-57-30	
DRAWN:	DATE:	UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$	CAGE CODE: OD2L5 SIZE: C REV: N/A DWG NO.: 85177
APPROVED:	DATE:		
Paiboon Luekhamhan T. Nguyen		DO NOT SCALE THE DRAWING	