

REVERSE POLARITY CONN TNC-M CRIMP RG316 RG174

SC9701


SPECIFICATIONS

ELECTRICAL
 FREQUENCY: 0-3 GHZ
 IMPEDANCE: 50 OHMS
 VSWR: 1.3 MAX

MECHANICAL
 MATERIAL BODY: NICKLE PLATED BRASS
 MATERIAL CONTACT: BRASS
 CONTACT PLATING: 30 μ-IN
 INSULATOR: TEFLON
 INTERFACE: MIL-STD-348B
 TEMPERATURE: -55 TO +120°C

ROHS COMPLIANT

ASSEMBLY PROCEDURE:
 TRIM CABLE AS SHOWN
 SLIDE SLEEVE ONTO CABLE
 SOLDER CONTACT ONTO CENTER CONDUCTOR
 FLARE CUT END OF BRAID SLIGHTLY BY ROTATING DIELECTRIC
 PUSH CABLE IN UNTIL DIELECTRIC BOTTOMS IN CONNECTOR
 TRIM EXCESS BRAID WIRES EVEN WITH SHOULDER OF BODY
 SLIDE CRIMP SLEVE FORWARD UNTIL FLUSH W BODY
 CRIMP

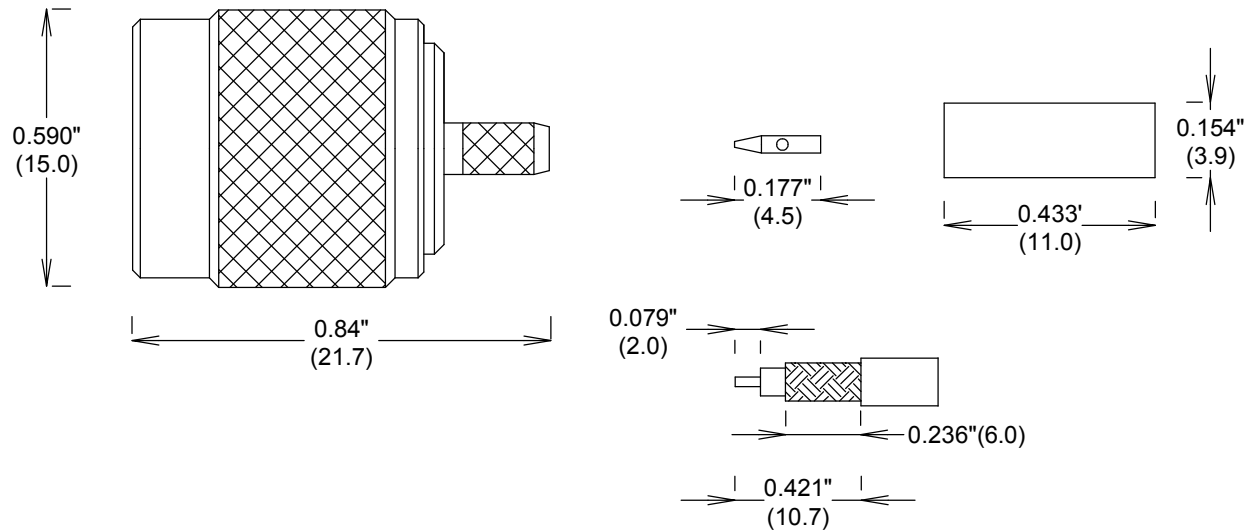

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

**REVERSE POLARITY CONN TNC-M
CRIMP RG316 RG174**

SIZE	CAGE CODE	DWG NO	REV
A	3FKR5	SC9701	---
SCALE		SHEET	

ALL DIMENSIONS IN inches(MM) Typical