



BNC Twinax Tee Adapter Jack-Jack-Jack

TECHNICAL DATA SHEET

PE9279

BNC Twinax Tee Adapter Jack-Jack-Jack

Configuration

Connector 1	BNC Twinax Jack
Impedance 1	78 Ohms
Connector Specification 1	MIL-STD-348A
Connector 2	BNC Twinax Jack
Impedance 2	78 Ohms
Connector Specification 2	MIL-STD-348A
Connector 3	BNC Twinax Jack
Connector Specification 3	MIL-STD-348A
Adapter Design	Standard
Body Style	Tee
Maximum Operating Voltage, Volts	500
Dielectric Withstanding Voltage, Vrms	1,500

Mechanical Specifications

Temperature

Operating Range, deg C	-65 to +165
------------------------	-------------

Size

Length, in [mm]	1.34 [34.04]
Height, in [mm]	0.93 [23.62]

Connector 1

Type	BNC Twinax Jack
Inner Conductor Material and Plating	Brass, Gold
Body Material and Plating	Brass, Nickel
Body Plating Specification	100µ in. minimum
Dielectric Type	Teflon

Connector 2

Type	BNC Twinax Jack
Inner Conductor Material and Plating	Beryllium Copper, Gold
Body Material and Plating	Brass, Nickel
Body Plating Specification	100µ in. minimum
Dielectric Type	Teflon

Connector 3

Type	BNC Twinax Jack
Inner Conductor Material and Plating	Beryllium Copper, Gold
Body Material and Plating	Brass, Nickel
Body Plating Specification	100µ in. minimum
Dielectric Type	Teflon

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Twinax Tee Adapter Jack-Jack-Jack PE9279](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



BNC Twinax Tee Adapter Jack-Jack-Jack

TECHNICAL DATA SHEET

PE9279

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant

Yes

Plotted and Other Data

Notes:


Values at 25 °C, sea level

URL: <http://www.pasternack.com/bnc-twinax-jack-jack-jack-tee-adapter-pe9279-p.aspx>

BNC Twinax Tee Adapter Jack-Jack-Jack from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

PE9279 CAD Drawing
 BNC Twinax Tee Adapter Jack-Jack-Jack

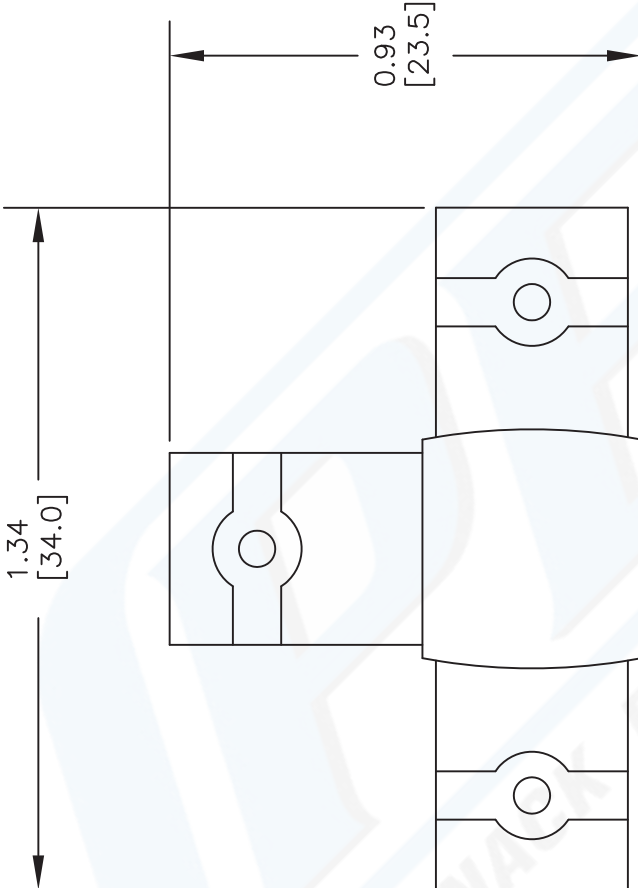

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE
PE9279

REV. A	FSCM NO. 53919	CAD FILE 032312	SCALE N/A	SIZE A	2233
--------	----------------	-----------------	-----------	--------	------

PE PASTERNAK[®]
 Pasternack Enterprises, Inc.
 P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | **Fax:** (949) 261-7451
Website: www.pasternack.com | **E-Mail:** sales@pasternack.com