



## SP6T Electromechanical Relay Normally Open Switch DC to 18 GHz, SMA, 35 Watts, 28V Control

### Electromechanical Relay Switches Technical Data Sheet

PE7159

#### Features

- SP6T Switch
- DC to 18GHz Frequency Range
- 1M Cycles Min Lifetime
- Normally Open Switch
- -40 to +85 Deg C Operating Temperature
- Insertion Loss 0.5 dB Max
- VSWR 1.5:1 Max
- +28 Vdc Operating Voltage

#### Applications

- Test & Measurement
- Instrumentation

#### Description

The PE7159 is a Single Pole Six Throw Electromechanical Relay Switch that operates from DC to 18 GHz and can handle up to 85 Watts of CW input power. This design features a Normally Open Actuator and is rated for 1M Life Cycles. Insertion loss is specified from 0.2 dB max and Isolation from 80 dB min, with +20 Vdc operating voltage. Performance is guaranteed over -40 deg C to +85 deg C, and the switch assembly is RoHS and REACH compliant. The package interface uses solder terminals and SMA female connectors.

#### Electrical Specifications

Switch Type	SP6T, Reflective
Actuator Type	Normally Open
Pickup Voltage	20 Volts
Dropout Voltage	2 Volts

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		18	GHz
Impedance		50		Ohms
Operating Voltage	22	28	30	Volts
Actuating Current @ 28 Volts			115	mA
VSWR			1.5:1	
Insertion Loss			0.5	dB
Isolation	60			dB
Input Power (CW)			35	Watts

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SP6T Electromechanical Relay Normally Open Switch DC to 18 GHz, SMA, 35 Watts, 28V Control PE7159](#)



SP6T Electromechanical Relay Normally Open Switch  
DC to 18 GHz, SMA, 35 Watts, 28V Control

## Electromechanical Relay Switches Technical Data

PE7159

### Performance by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency Range	DC to 4	4 to 8	8 to 12.4	12.4 to 18		GHz
VSWR, Max	1.2:1	1.3:1	1.4:1	1.5:1		
Insertion Loss, Max	0.2	0.3	0.4	0.5		dB
Isolation, Min	80	70	60	60		dB
Input Power, Typ (CW)	85	55	45	35		Watts

### Mechanical Specifications

#### Size

Length	2.37 in [60.2 mm]
Width/Diameter	1.75 in [44.45 mm]
Height	1.75 in [44.45 mm]
Weight	0.31 lbs [140.61 g]
Body Material and Plating	Aluminum, Black Anodized
Package Type	Connectorized Module
Operating Life	1,000,000 Cycles
Switching Time	15 ms Max

#### Connectors

RF Connector Type	SMA Female
RF Connector Contact Material and Plating	Beryllium Copper, Gold
RF Connector Body Material and Plating	Passivated Stainless Steel
Control Connector	Solder Pin

Mechanical Specification Notes:

RF Connector mating requirements per MIL-C-39012

### Environmental Specifications

#### Temperature

Operating Range	-40 to +85 deg C
Storage Range	-55 to +100 deg C

### Compliance Certifications (visit [www.Pasternack.com](http://www.Pasternack.com) for current document)

RoHS Compliant	
REACH Compliant	12/17/2014

### Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SP6T Electromechanical Relay Normally Open Switch DC to 18 GHz, SMA, 35 Watts, 28V Control PE7159](#)



SP6T Electromechanical Relay Normally Open Switch  
DC to 18 GHz, SMA, 35 Watts, 28V Control

Electromechanical Relay Switches Technical Data

PE7159

SP6T Electromechanical Relay Normally Open Switch DC to 18 GHz, SMA, 35 Watts, 28V Control from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SP6T Electromechanical Relay Normally Open Switch DC to 18 GHz, SMA, 35 Watts, 28V Control PE7159](http://www.pasternack.com/sma-electromechanical-sp6t-switch-18ghz-35watts-22-30volts-f-n-pe7159-p.aspx)

URL: <http://www.pasternack.com/sma-electromechanical-sp6t-switch-18ghz-35watts-22-30volts-f-n-pe7159-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE7159 CAD Drawing

SP6T Electromechanical Relay Normally Open Switch  
DC to 18 GHz, SMA, 35 Watts, 28V Control

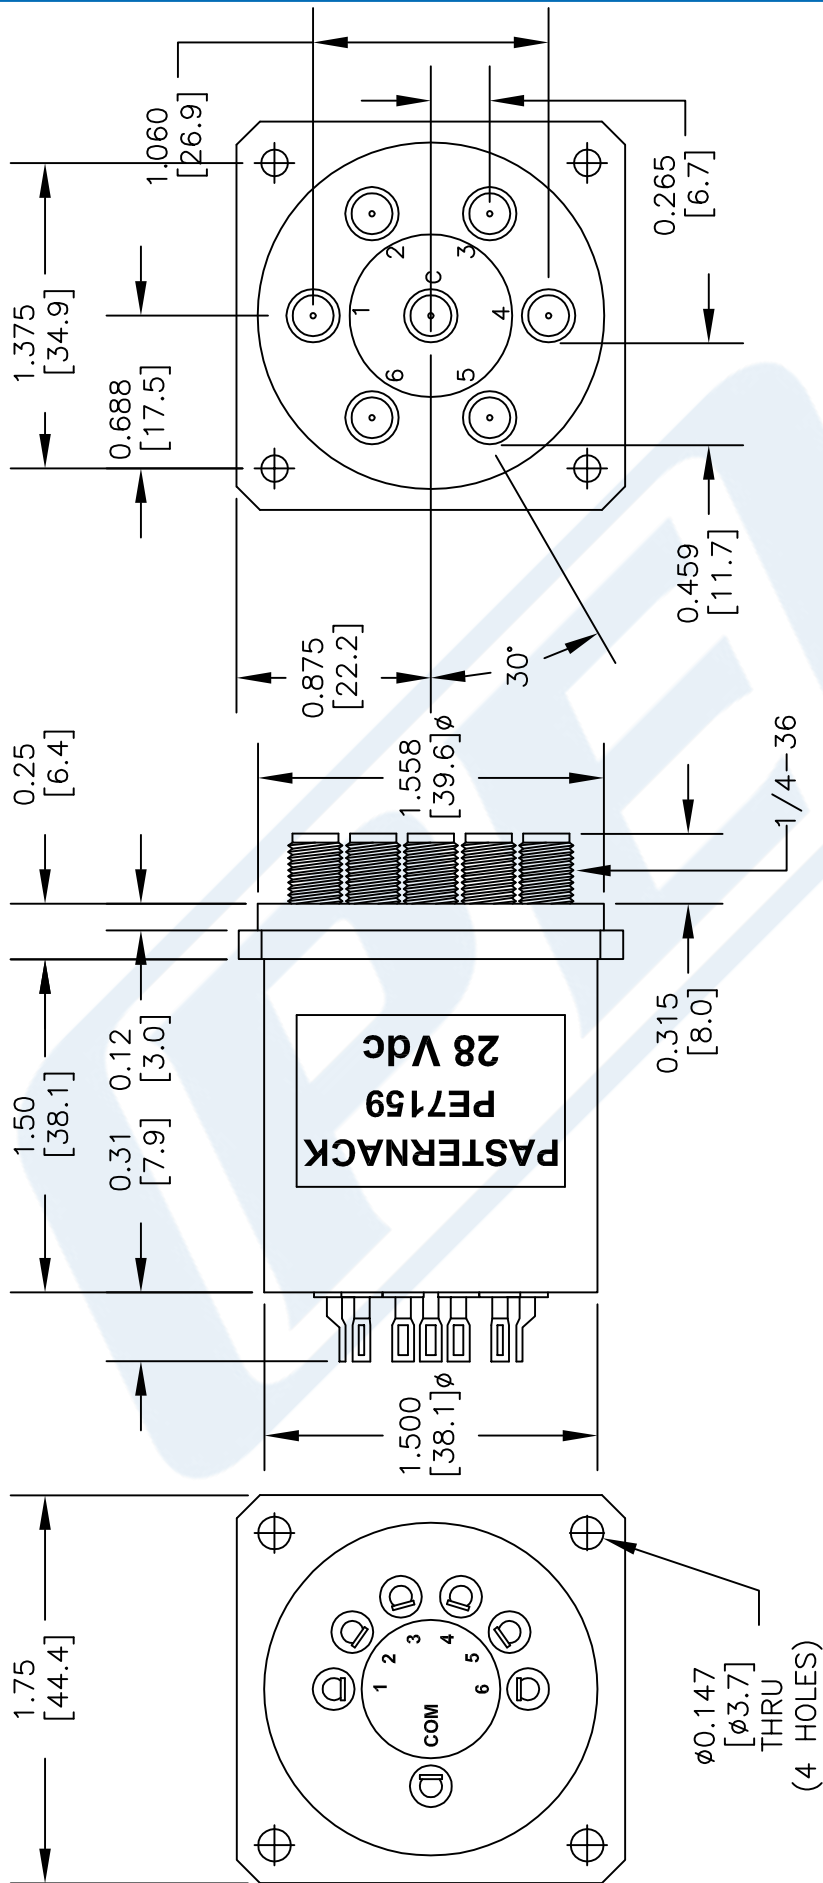

DWG TITLE

**PE7159**

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES (mm).

FSCM NO. 53919

CAD FILE 090915

SCALE N/A


SIZE A

150

**PE PASTERNAK**  
THE ENGINEER'S RF SOURCE  
Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
Phone: (949) 261-1920 | Fax: (949) 261-7451  
Website: www.pasternack.com | E-Mail: sales@pasternack.com

# PE7159 CAD Drawing

SP6T Electromechanical Relay Normally Open Switch  
DC to 18 GHz, SMA, 35 Watts, 28V Control

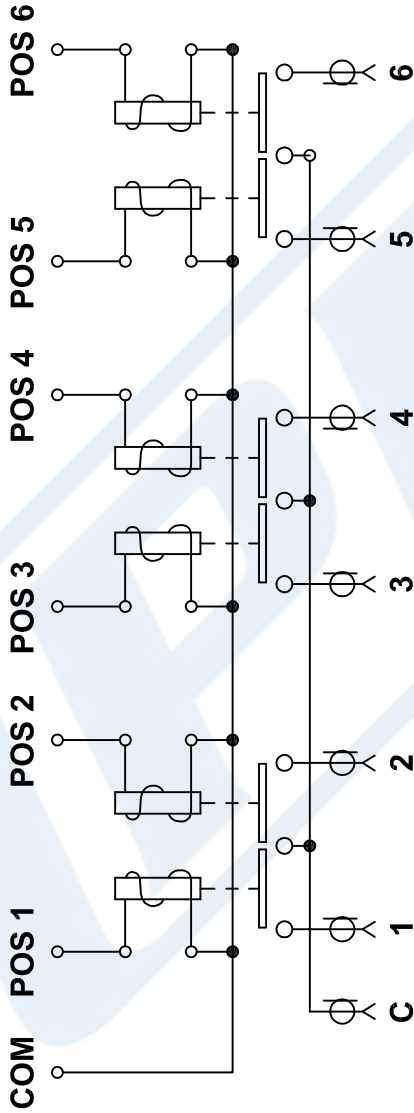

SCHEMATIC SHOWN WITH ALL PORTS OPEN

DWG TITLE

**PE7159**

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES (mm).

**Pasternack Enterprises, Inc.**  
P.O. Box 16759 | Irvine | CA | 92623  
Phone: (949) 261-1920 | Fax: (949) 261-7451  
Website: www.pasternack.com | E-Mail: sales@pasternack.com

FSCM NO. 53919

CAD FILE 090915

SCALE N/A

SIZE A

150