


4 3 2 1

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

F = FLANGE TYPES  
 -6 = UG-COVER  
 -7 = UG-CHOKE  
 -S = SPECIAL

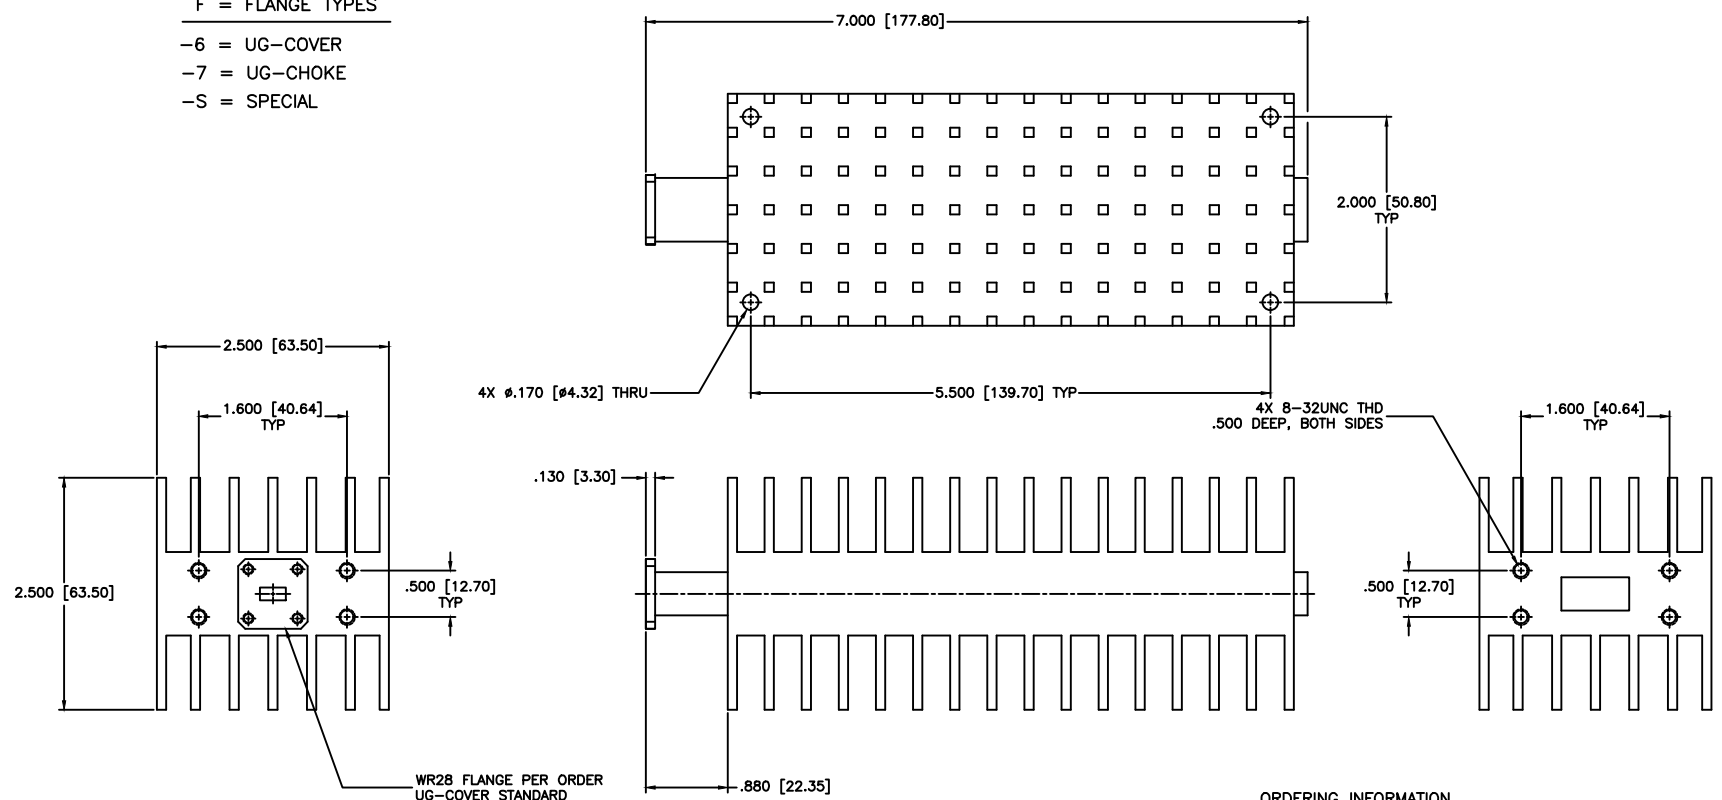

SPECIFICATIONS

Frequency Range: 26.5-40 GHz  
 Waveguide Size: WR28 (Input)  
 Flange Types: Per Order (-6,-7,-S)  
 VSWR: 1.15 Max.  
 Average Power: 500 Watts

ORDERING INFORMATION  
 EXAMPLE PART NUMBER: WL-15-F  
 VERY HIGH POWER SERIES  
 FREQUENCY BAND  
 FLANGE TYPE

MATERIAL:  ALUMINUM 6061		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7225 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-8254 FAX: (727) 381-8116 http://www.mcli.com		SCALE: N/A
DRAWN: Paiboon Luekhamhan		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		SHEET: N/A
DATE: 05-02-2011		DRAWING TITLE: TERMINATION, WR28 500 Watts		
APPROVED: T. Nguyen		PART NO. WL-15-F		
DATE: 05-02-2011		CAGE CODE: OD2L5		
		SIZE: N/A		
		REV: N/A		
		DWG NO. 85645		
DO NOT SCALE THE DRAWING				

4 3 2 1