

Surface Mount Bandpass Filter

SXBP-150+

50Ω 140 to 160 MHz

Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	0.5W Max.

Permanent damage may occur if any of these limits are exceeded.

Pin Connections

INPUT	1
OUTPUT	8
GROUND	2, 3, 4, 5, 6, 7


Outline Drawing

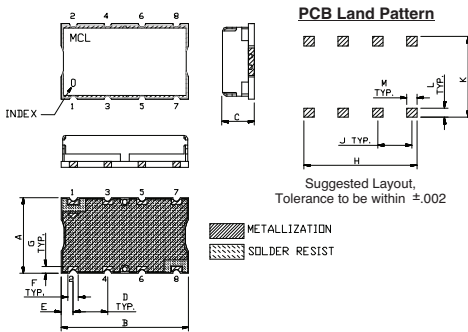

Outline Dimensions (inch/mm)

A	B	C	D	E	F	
.44	.74	.27	.200	.07	.060	
11.18	18.80	6.86	5.08	1.78	1.52	
G	H	J	K	L	M	wt.
.040	.660	.200	.470	.055	.060	grams
1.02	16.76	5.08	11.94	1.40	1.52	3.0

Demo Board MCL P/N: TB-368 Suggested PCB Layout (PL-230)

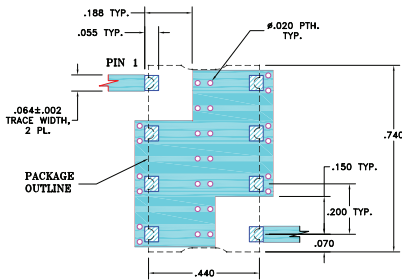


- NOTE:
- TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS: .025±.002". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 - BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 - DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- high rejection
- good VSWR, 1.3:1 typ @ passband
- aqueous washable

Applications

- radio link
- receivers / transmitters
- professional mobile radio / public access mobile radio (PMR/ PAMR)



CASE STYLE: HF1139
PRICE: \$15.95 ea. QTY (1-9)


+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


Bandpass Filter Electrical Specifications (T_{AMB} = 25°C)

CENTER FREQ. (MHz)	PASSBAND (MHz) (Loss < 3dB)	STOPBANDS (MHz)				VSWR (:1)		
		Loss > 20dB		Loss > 40dB		Passband		Stopband
F _c	F ₁ - F ₂	F ₃	F ₄	F ₅	F ₆	Typ.	Max.	Typ.
150	140 - 160	120	190	100	250 - 2400	1.3	1.8	20

Typical Frequency Response



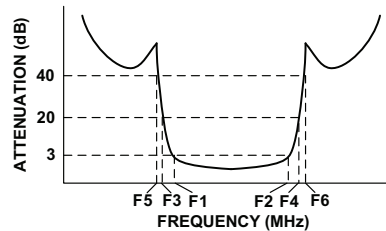


Functional Schematic

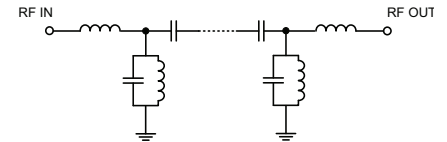

Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)		Return Loss (dB)	Frequency (MHz)	Group Delay (nSec)
	\bar{x}	σ			
1.0	83.96	1.58	0.37	135.0	47.94
50.0	78.09	1.11	0.31	138.0	43.87
100.0	54.50	0.68	0.17	139.0	40.79
120.0	29.52	0.89	0.40	140.0	37.89
130.0	11.22	1.23	2.35	141.0	35.78
135.0	3.38	0.59	16.16	142.0	34.12
140.0	1.99	0.06	18.26	144.0	31.61
150.0	1.69	0.01	28.35	146.0	29.70
160.0	2.05	0.04	17.98	147.5	29.05
165.0	3.19	0.36	9.45	148.0	28.76
170.0	8.77	0.99	2.53	150.0	27.97
175.0	15.71	0.87	1.21	152.0	27.42
184.0	25.51	0.60	0.64	154.0	27.86
190.0	30.53	0.49	0.49	155.0	27.58
250.0	56.82	0.34	0.18	156.0	27.72
1000.0	88.44	3.18	0.15	158.0	27.64
2000.0	61.58	0.28	0.28	160.0	28.49
2400.0	55.81	0.21	0.29	165.0	36.48

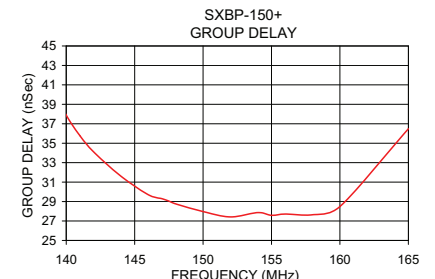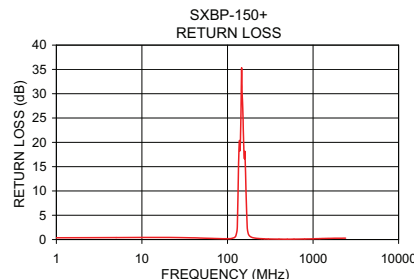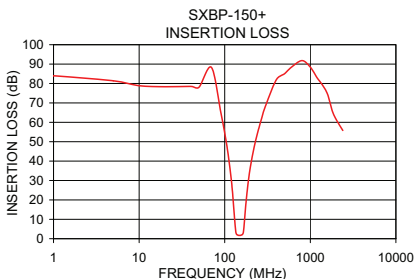

Mini-Circuits
ISO 9001 ISO 14001 AS 9100 CERTIFIED
IF/RF MICROWAVE COMPONENTS

For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. A
M117530
EDR-8731UF1
SXBP-150+
URJ/RAV
121014
Page 1 of 1