



20 dB DC Bias Attenuator, 75 F Male To 75 F Female Brass
Nickel Body Rated To 2 Watts From 500 MHz To 2 GHz

TECHNICAL DATA SHEET

PE7064-20

20 dB DC Bias Attenuator, 75 F Male To 75 F Female Brass Nickel Body Rated To 2 Watts From 500 MHz To 2 GHz

Configuration

Design	DC Bias, Bidirectional Attenuator
Connector 1	F Male
Connector 2	F Female
Body Material and Plating	Brass, Nickel

Electrical Specifications

Frequency Range, GHz	0.5 to 2
Impedance, Ohms	75
Attenuation Value, dB	20
Maximum Input Power, Watts	2
Maximum VSWR	1.45:1

Frequency 1

Range, GHz	0.5 to 2
VSWR	1.45:1
Attenuation Accuracy, dB	± 2

Mechanical Specifications

Temperature

Operating Range, deg C	-55 to +125
------------------------	-------------

Size

Length, in [mm]	2 [50.8]
Width, in [mm]	0.438 [11.13]

Connector 1

Type	F Male
Coupling Nut Material and Plating	Brass, Nickel
Hex Size, in.	7/16
Torque, in-lbs [Nm]	15 [1.7]
Body Material and Plating	Brass, Nickel

Connector 2

Type	F Female
Body Material and Plating	Brass, Nickel

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant	Yes
----------------	-----

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [20 dB DC Bias Attenuator, 75 F Male To 75 F Female Brass Nickel Body Rated To 2 Watts From 500 MHz To 2 GHz PE7064-20](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



20 dB DC Bias Attenuator, 75 F Male To 75 F Female Brass
Nickel Body Rated To 2 Watts From 500 MHz To 2 GHz

TECHNICAL DATA SHEET

PE7064-20

Plotted and Other Data

Notes:

Values at 25 °C, sea level

20 dB DC Bias Attenuator, 75 F Male To 75 F Female Brass Nickel Body Rated To 2 Watts From 500 MHz To 2 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [20 dB DC Bias Attenuator, 75 F Male To 75 F Female Brass Nickel Body Rated To 2 Watts From 500 MHz To 2 GHz PE7064-20](http://www.pasternack.com/20db-dc-bias-f-male-f-female-2-watts-attenuator-pe7064-20-p.aspx)


URL: <http://www.pasternack.com/20db-dc-bias-f-male-f-female-2-watts-attenuator-pe7064-20-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

PE7064-20 CAD Drawing

20 dB DC Bias Attenuator, 75 F Male To 75 F Female Brass
Nickel Body Rated To 2 Watts From 500 MHz To 2 GHz

P/N	ATTEN.	FIGURE
PE7064-6	6 dB	1
PE7064-10	10 dB	1
PE7064-3	20 dB	2

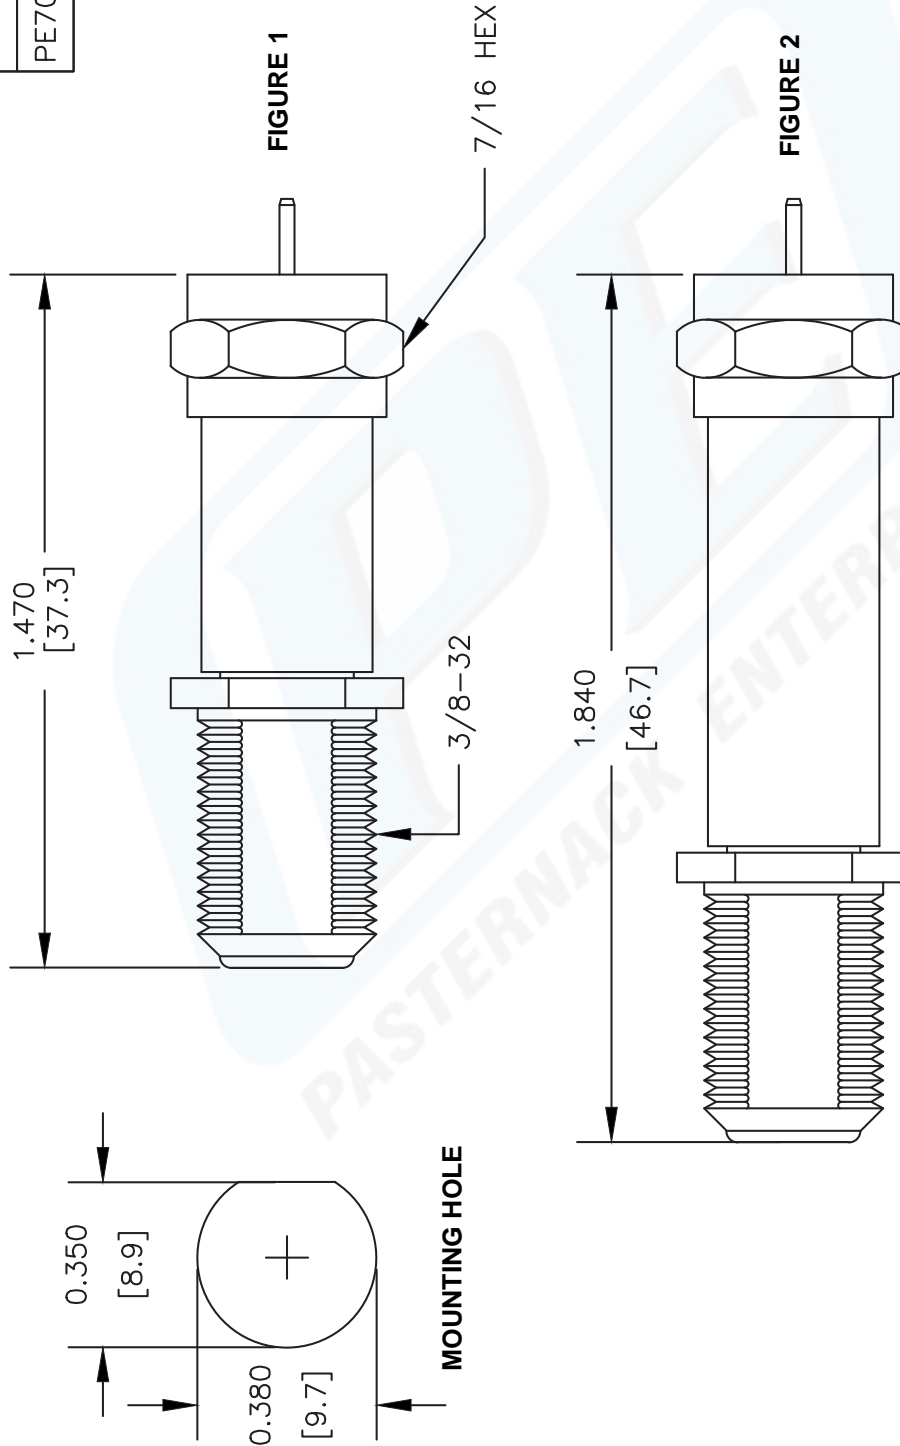

DWG TITLE

PE7064

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

FSCM NO. 53919

XXXX

SIZE A

SCALE N/A

CAD FILE 030409-A

PE PASTERNAK®

Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com