

# BIAS TEES

SMA, up to 12 GHz, 100 Volts / 2.5 Amps

**RoHS**  
Compliant




## SPECIFICATIONS:

Models: 8800SMFX-yy, 8800SFFX-yy, 8800SMM-yy, 8800SMX-yy

<b>Electrical:</b>		
Frequency Range	10 MHz - 12 GHz	
Standard Freq. Values	2.5, 6 & 12 GHz	
Insertion Loss	Typical	Maximum
10 MHz - 30 MHz	1.00 dB	1.25 dB
30 MHz - 2.5 GHz	0.50 dB	1.00 dB
2.5 - 6 GHz	1.00 dB	1.25 dB
6 - 9 GHz	1.50 dB	2.00 dB
9 - 12 GHz	2.00 dB	3.00 dB
VSWR	Typical	Maximum
30 MHz - 2.5 GHz	1.40:1	1.50:1
2.5 GHz - 4 GHz	1.30:1	1.50:1
4 - 6 GHz	1.40:1	1.50:1
6 - 9 GHz	1.50:1	1.80:1
9 - 12 GHz	1.75:1	2.00:1
Isolation (RF to Bias Port)	> 30dB Typ.	
3dB Bandwidth	5 MHz - 15 GHz	
Impedance	50 Ohms	
Bias-Path Resistance	0.04 Ohms Typ., 0.05 Ohms Max.	
DC Voltage	100 VDC Max.	
DC Current	2.5 Amps Max.	
RF Power	5 Watts Max	
Current Rating vs Temperature	See Graph	
<b>Environmental</b>		
Operating Temperature Range	-55°C to +105°C	
Storage Temperature Range	-60°C to +90°C	
<b>Mechanical:</b>		
SMA Connectors	Passivated Stainless Steel	
Mates with MIL-STD-348		
BNC Connectors	Nickel Plated Brass	
Mates with MIL-STD-348		
Conductors	Gold Plated Beryllium Copper	
Body	Aluminum with Chemical Conversion Coating	



Typical performance from 5 MHz - 9 GHz

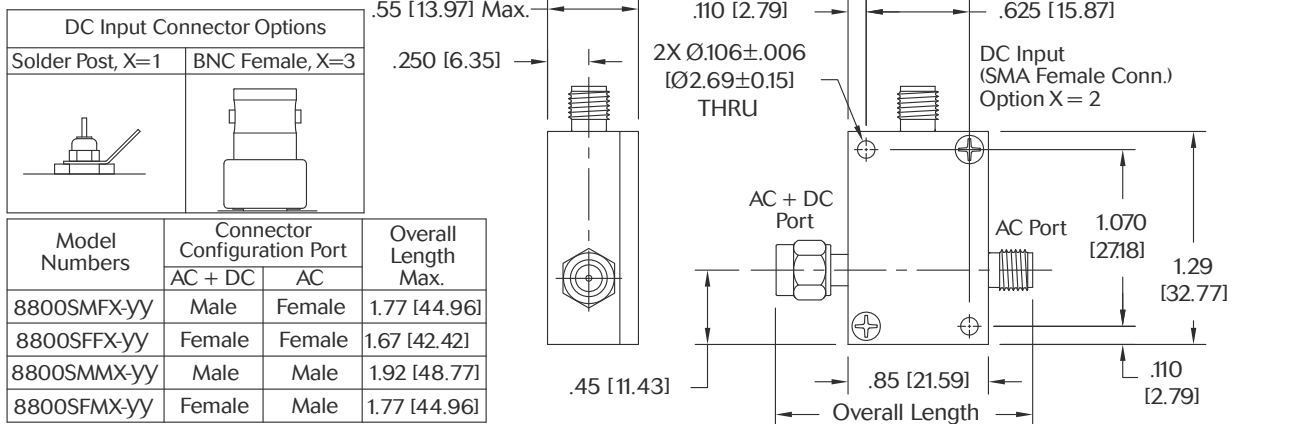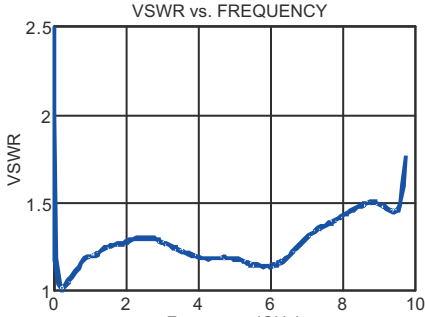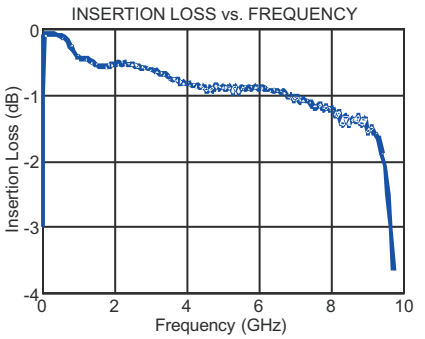

### HOW TO ORDER:

Model Number: **8800SZZX-yy**

Base Number

DC Connector Type

1 = Solder Post  
2 = SMA Female Conn.  
3 = BNC Female Conn.

Freq. Range

02 = 10 MHz - 2.5 GHz  
06 = 10 MHz - 6 GHz  
12 = 10 MHz - 12 GHz

### Ordering Examples:

Model Number: **8800SFF2-02**  
10 MHz - 2.5 GHz, SMA Fem/Fem  
SMA Female DC Connector Type

Model Number: **8800SMF1-06**  
10 MHz - 6 GHz, SMA Male/Fem  
Solder Post DC Connector Type

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.  
Design specifications are subject to change without notice.  
Contact factory for technical specifications before purchasing or use.

8800S: REV F (M)



Aeroflex / Inmet, Inc. • 300 Dino Drive, Ann Arbor, MI 48103 • U.S.A.  
888-244-6638 or 734-426-5553 • FAX: 734-426-5557  
www.aeroflex.com/inmet • inmet@aeroflex.com





**PROPRIETARY NOTICE**

THE INFORMATION CONTAINED IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT THE PRIOR WRITTEN PERMISSION OF AEROFLEX/INMET INC.

**REVISIONS**

LTR	DESCRIPTION	DATE	DCN NO.
F	SEE REVISION HISTORY	2/27/07	06-00708

**ADDITIONAL INFORMATION**  
Typical performance from 5 MHz - 9 GHz

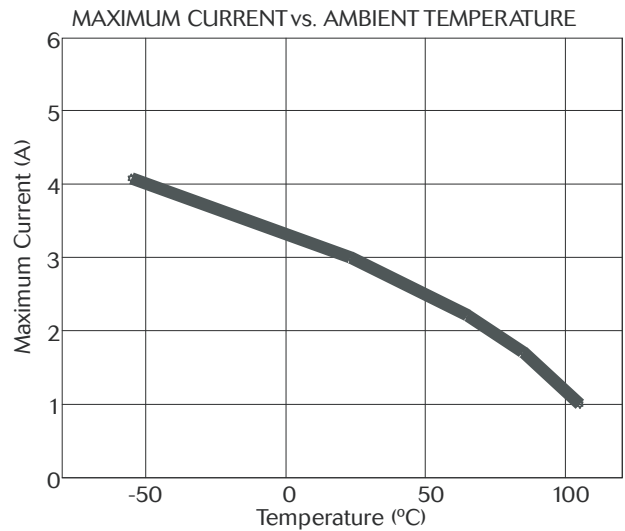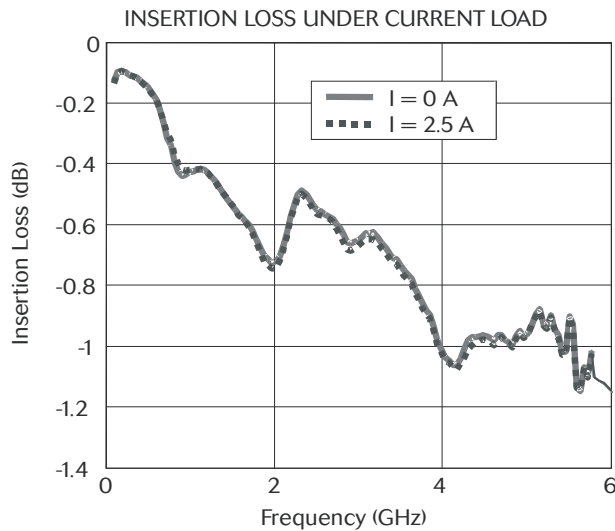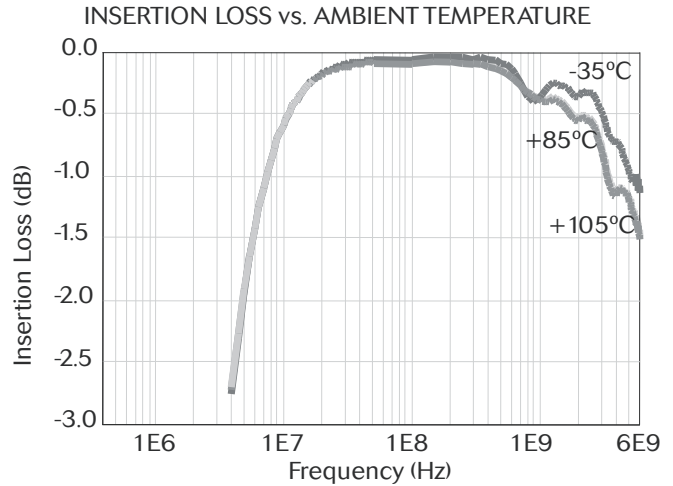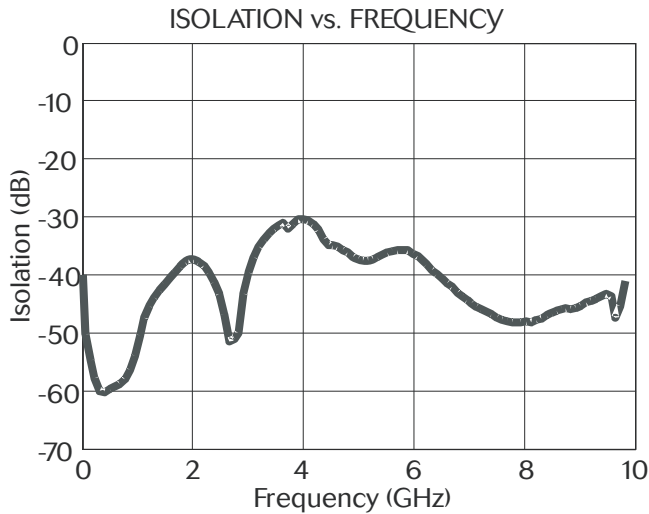

NOTE: DIMENSIONS IN BRACKETS ARE EXPRESSED IN MILLIMETERS AND ARE FOR REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES DECIMAL      ANGULAR .XX ± .01      ± .XXX ± .005 DO NOT SCALE DRAWING	CONTRACT NO.			300 DINO DRIVE ANN ARBOR, MI 48103 TELEPHONE (734) 426-5553 FACSIMILE (734) 426-5557		
	CHECKED	DATE		TITLE:                      OUTLINE DRAWING, BIAS TEE, SMA CONNECTORS 10 MHz - 12 GHz, 50 OHM 8800SXXZ-YY SERIES		
	ACB	8/12/02				
	ENGINEERING	DATE				
	EA	8/12/02				
MATERIAL:	MANUFACTURING	DATE	SIZE	FSCM NO.	DWG. NO.	
	RB	9/6/02	A	64671	8800S	
FINISH	QUAL. ASSURANCE	DATE	SCALE		RELEASE DATE	
	RFF	9/3/02	FULL			
SIMILAR TO	WEIGHT (gr)	MARKETING	SHEET		OF	
		RG	2		2	