

**OUTPUT****Frequency**

25 MHz

**Level**

+13 dBm ±2 dB into 50 ohms

**STABILITY****Aging**5 x 10<sup>-10</sup> per day

after 30 days operating, typical

**Phase Noise L(f), Static**

10 Hz -130 dBc/Hz

100 Hz -150 dBc/Hz

1 kHz -158 dBc/Hz

10 kHz -160 dBc/Hz

100 kHz -160 dBc/Hz

**Temperature Stability**±5 x 10<sup>-8</sup>, 0° to +50°C (Ref +25°C)**Harmonics**

≤ -30 dBc

**Sub-Harmonics**

≤ -50 dBc

**Non-Harmonic Spurious**

≤ -80 dBc, excluding power supply line related spurs

**MECHANICAL****Dimensions**

2.25" x 2.25" x 1.3"

**Connectors**

SMA(f) and solder pins on one side

**Packaging**

Nickel-plated machined aluminum housing (CHP-1A)

**Mounting**Threaded inserts, # 2-56, 4 places  
Tapped holes on sides, 16 places  
(provisions for shock mounts)**POWER REQUIREMENTS****Warm-Up Power**

≤ 9 Watts for 5 minutes at +25°C

**Total Power**

≤ 6 Watts at +25°C

**Supply Voltage**

+15 VDC ±5%

**ADJUSTMENT****Mechanical Tuning**±1 x 10<sup>-6</sup>**Electrical Tuning**±2 x 10<sup>-7</sup> min, ±5 VDC

Negative slope

**CRYSTAL****Type**

5 MHz SC-cut (x5)

**ENVIRONMENTAL****Operating Temperature**

0° to +50°C

**Storage Temperature**

-40° to +85°C

**OTHER****Label**

Use conventional label with the following information:

501-26078 (Current Rev.)

25 MHz Citrine Plus

+15 VDC

Serial # - Date Code

**Test Data**

Output Level

Phase Noise – Static

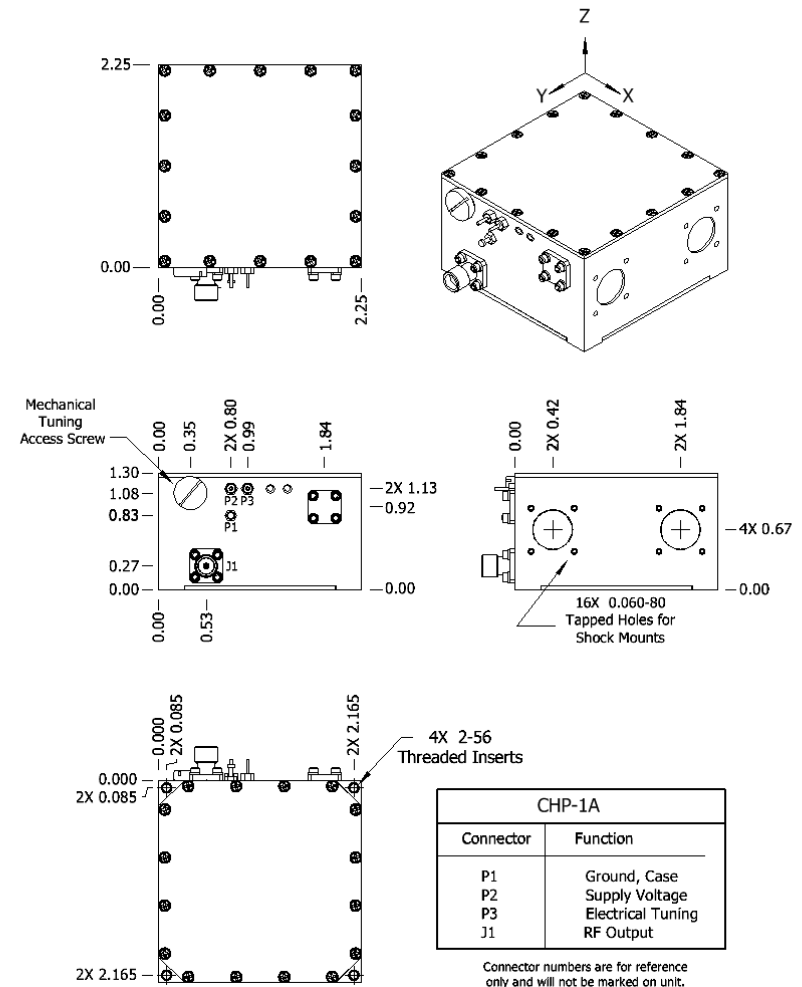
Temperature Stability

Harmonics, Subs, Spurious

Power - Warm-up and Total

Tuning – MT and ET

REV	DATE	REVISION RECORD	DWN	AUTH
-	07-03-12	Initial Release	PAC	

**Wenzel Associates, Inc.**

Austin, Texas

Title:

**Premium 25 MHz Citrine Plus Crystal Oscillator**

P/N:

**501-26078**

Rev:

-

Date:

**07-03-12**

Drawn:

Ref:

ULN

Tolerances:  
(except as noted)  
Dimensions are in inches0.XX Dec:  
**±0.030"**0.XXX Dec:  
**±0.010"**FSCM:  
**62821**

Page 1 of 1