


**Key Features:**

- Frequency range: 450~900MHz, up to 22% bandwidth
- Drop-in configuration
- Small size, low cost
- Power handling +75 Watts maximum
- Operating temperature -30~+60°C
- Customer specify center frequency and bandwidth

**Electrical Specifications**

Part No.	Freq Range MHz	Insertion Loss, dB	Reverse Isolation, dB	VSWR	Forward Power, Watts	Temp. Range, °C
F1545-0520-20	470-570	0.5 Max	≥ 20	≤ 1.2	75	-30 ~ +60
F1545-0630-21	570~700	0.5 Max	≥ 20	≤ 1.2	75	-30 ~ +60
F1545-0780-21	700-860	0.5 Max	≥ 20	≤ 1.2	75	-30 ~ +60

**Mechanical Structure:**

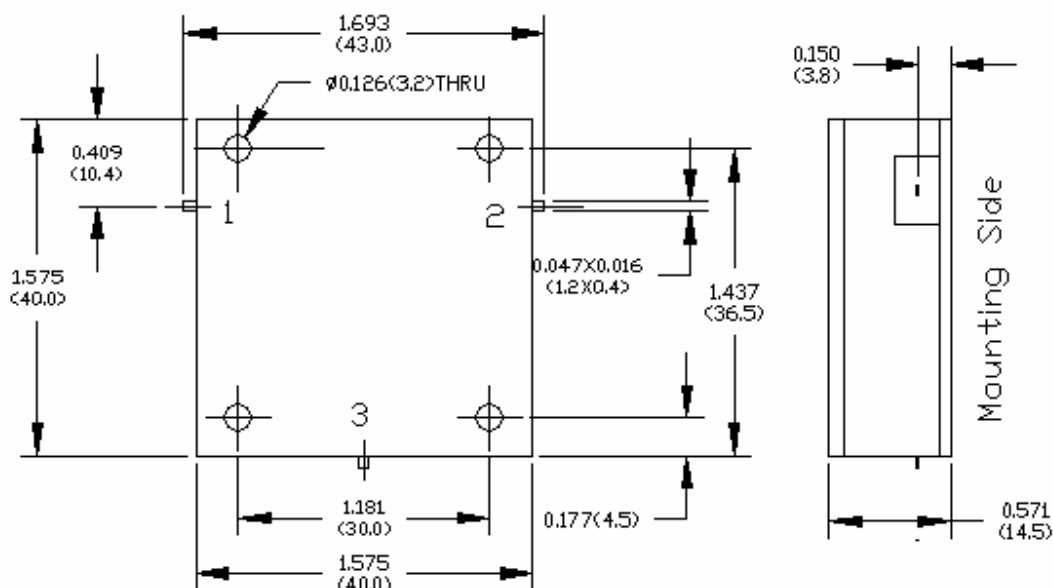

Note: All units in inches.

**Ordering Information:**

