
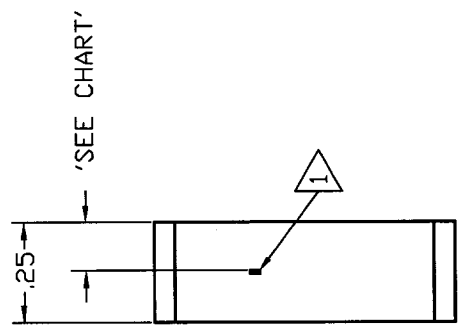


COMPUTER GENERATED DRAWING
MANUAL CHANGES NOT AUTHORIZED

REVISIONS		
REV.	DESCRIPTION	DATE
NC	INITIAL RELEASE	4-22-95
A	REV PER ECN: 5515 & 6966	4-22-95
B	REV PER ECN: 8363	

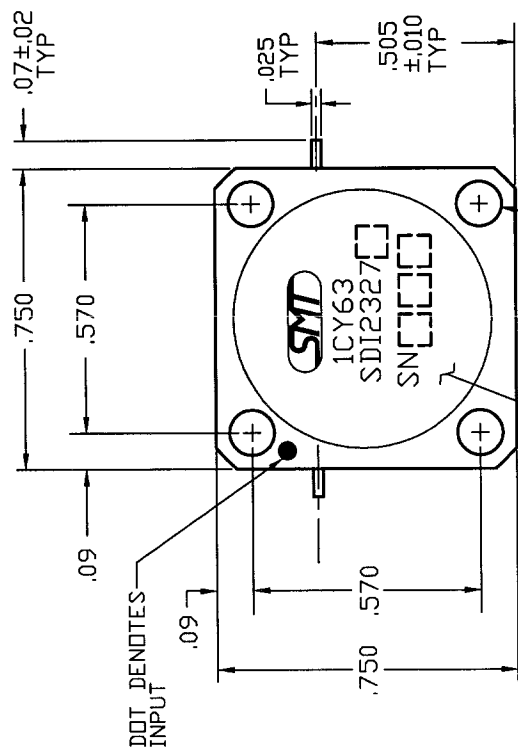

SPECIFICATIONS

1. FREQUENCY RANGE: 2.3 - 2.7 GHz
2. VSWR: 1.30:1 MAX.
3. ISOLATION: 18 dB MIN.
4. INSERTION LOSS: 0.5 dB MAX.
5. TEMPERATURE:
 - OPERATING: -40° TO +85° C
 - STORAGE: -40° TO +85° C
6. LOAD RATING: 4 WATTS MIN. @85°C HEATSINK TEMPERATURE

TAB HEIGHT TABLE	
OPTION NO.	HEIGHT (NOM)
A	.065
B	.075
C	.090
D	.100
E	.120

LABEL THIS SURFACE

ITEM	QTY	FSM NO.	PART OR IDENTIFICATION NO.	NOMENCLATURE OR DESCRIPTION	MATERIAL SPECIFICATION
PARTS LIST					
CONTRACT NO.		SIERRA MICROWAVE TECHNOLOGY			
APPROVALS		TITLE:			
DRWR: B. ST CLAIR	DATE: 4-17-95	OUTLINE FOR SDI2327X			
CHECKED: WILSON	DATE: 4-22-95				
DESIGNER: RODRIGUEZ	DATE: 4-22-95				
MATERIAL:		SIZE FSCK NO. 1CY63			
FINISH:		DWG NO. 205-1943-001			
DO NOT SCALE DRAWING		SHEET OF			

- NOTES:
1. TABS ARE .005±.001 THK Be Cu, GOLD PLATED.
 2. CASE: STAINLESS STEEL NICKEL PLATED.