


DO NOT SCALE DRAWING

- 1.0 PERFORMANCE
- 1.1 FREQUENCY RANGE: DC-4GHz
- 1.2 VOLTAGE RATING: 500V RMS (sea level)
- 1.3 NOMINAL IMPEDANCE: 50 OHMS
- 1.4 DWV: 1500 V RMS @ 60 Hz (sea level)
- 1.5 TEMPERATURE RANGE: -65°C TO +165°C
- 2.0 MATERIALS
- 2.1 DIELECTRIC: PTFE
- 2.2 GASKET: SILICON RUBBER

- 2.3 CENTER CONTACT: BERYLLIUM COPPER
- 2.4 LOCKING RING: PHOSPHOR BRONZE
- 2.5 OTHER METAL PARTS: BRASS
- 3.0 FINISHES: SEE TABLE
- 4.0 MECHANICAL
- 4.1 MATES WITH MIL-STD-348

DWG NO. OL-0910-09-1		REV. A
PART NUMBER 0910-09	BODY NICKEL	CONTACT SILVER

PLATING PER SAN-TRON SPEC. 7.3.1-8

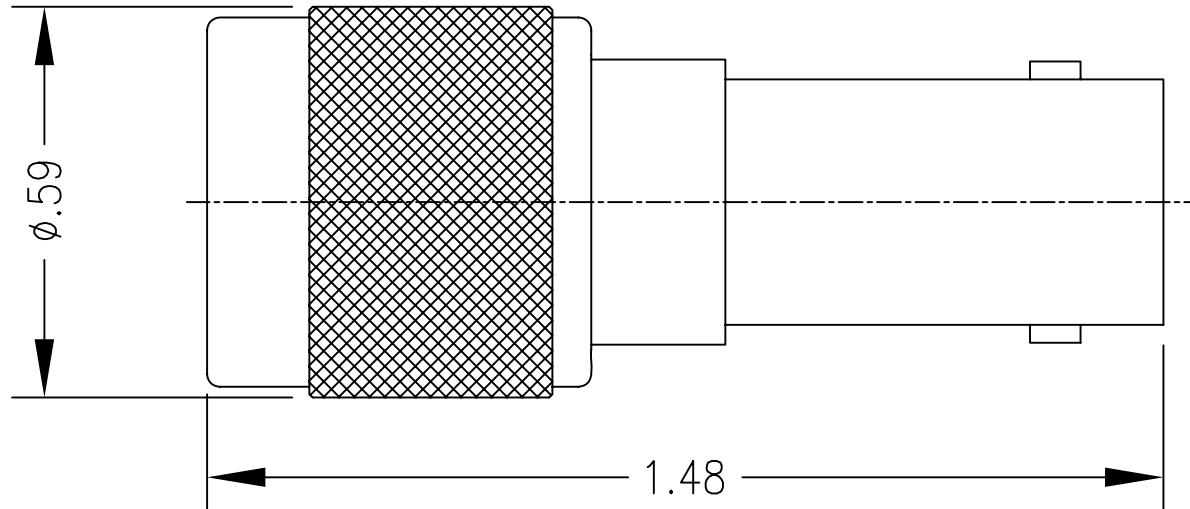

A	RELEASE	NEW	4/14/08	JTH	FSH
1	PRELIMINARY: DO NOT MFG	NEW	4/11/08		
Rev.	Revisions	Disp.	Date	Dwn.	Appd.

THIS DRAWING CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO SAN-TRON, INC. IT MUST NOT BE REPRODUCED OR DISCLOSED TO OTHERS OR USED IN ANY OTHER WAY, IN WHOLE OR PART EXCEPT AS AUTHORIZED IN WRITING BY SAN-TRON, INC.

UNLESS OTHERWISE SPECIFIED:
ALL DIMENSIONS ARE IN INCHES.
ALL DIMENSIONS ARE AFTER PLATING.
.XXX = ±.005 ALL MACHINED SURFACES 32/ MAX.
.XX = ±.01 ANG. ±1/2' FRACTIONAL = ±1/64

Ⓢ.004 MAX. TIR ⊥ AXIS .001

THIRD ANGLE PROJECTION

DWN	JTH	4/11/08
CHKD		
APPR	FSH	4/14/08



SAN-TRON, INC.
4 NEWBURYPORT TPK. IPSWICH MA USA 01938
TEL: 978 - 356 -1585 FAX: 978 - 356 -1573
WWW.santron.com E MAIL: santron@santron.com

TITLE
ADAPTER, TNC (M) TO BNC (F), STRAIGHT

MATERIAL:
SEE NOTES

FINISH:
SEE TABLE

CAGE CODE: 50896

SCALE: X:X

DWG NO. OL-0910-09-1	REV. A
-------------------------	-----------