



ROTARY KNOB MANUAL CONTROL STEP ATTENUATOR (DC-1GHZ 10DB RANGE)

Product description

- Very small package and broadband performance
- Continuous variable attenuation during operation
- Excellent Repeatability and Long Life Switch
- Low Deviation from Nominal Value
- 50Ω impedance standard upon request
- Higher average power available upon request
- Custom Configurations Available Upon Request.



Applications:

Include Communication, 3G, Digital Transmission, Radar, Military, Broadcast & Television, science & Research department etc.

Part Number	Frequency	Power (Watts)	Attenuation Range (dB)	Attenuation Step (dB)	VSWR max.	Insertion Loss (dB)	Accuracy (dB)
RKT2G1A10	DC-1GHz	2	10	1	1.20	<0.30	± 0.30

PN: **RKT 2 G X A 10**

- Manual Control Attenuator
- Power Handle In Watt
- Freq Unit GHz
- Freq Number
- Product Type
- Attenuation Range

Connector: SMA type, weight: 250g
 Temperature (Operational): -10° C~+50° C (Storage) -40° C~+70° C

MANUAL CONTROL ROTARY ATTENUATOR (DC-1GHZ 10DB RANGE)




RF-LAMBDA

The power beyond expectations

RKT2G1A10

MANUAL CONTROL ROTARY ATTENUATOR (DC-16GHZ 10DB RANGE)

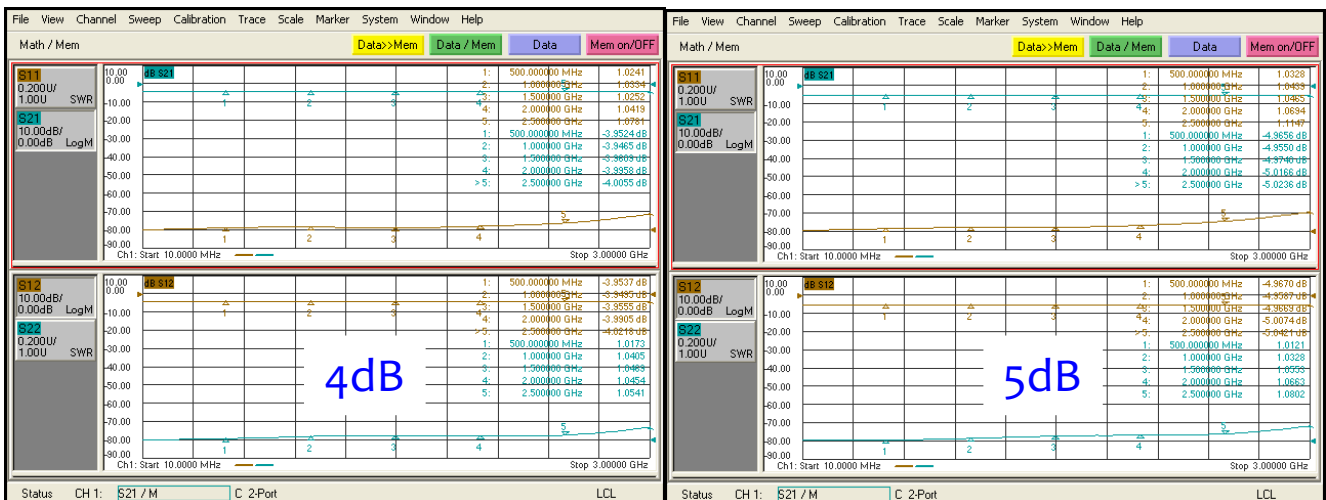



RF-LAMBDA

The power beyond expectations

RKT2G1A10

MANUAL CONTROL ROTARY ATTENUATOR (DC-16GHZ 10DB RANGE)

