



VOLTAGE CONTROLLABLE ATTENUATOR 1-2GHz


Features




- Wide Band Operation 1-2GHz or wider
- High Power Handle Capability up to 100W upon request.
- Current control and low power consumption
- Low Insertion Loss and High dynamic range
- Temperature Range -55°C~+85°C
- Maximum voltage +50V DC.
- Customization available upon request

Absorptive type attenuator


Frequency (GHz)	Insert. Loss (dB)	VSWR (Max:1)	Attenuation (dB)	Bias (V)	Connector	Speed
1-2	1.5	1.50	50dB min	<10V	SMA	200ns

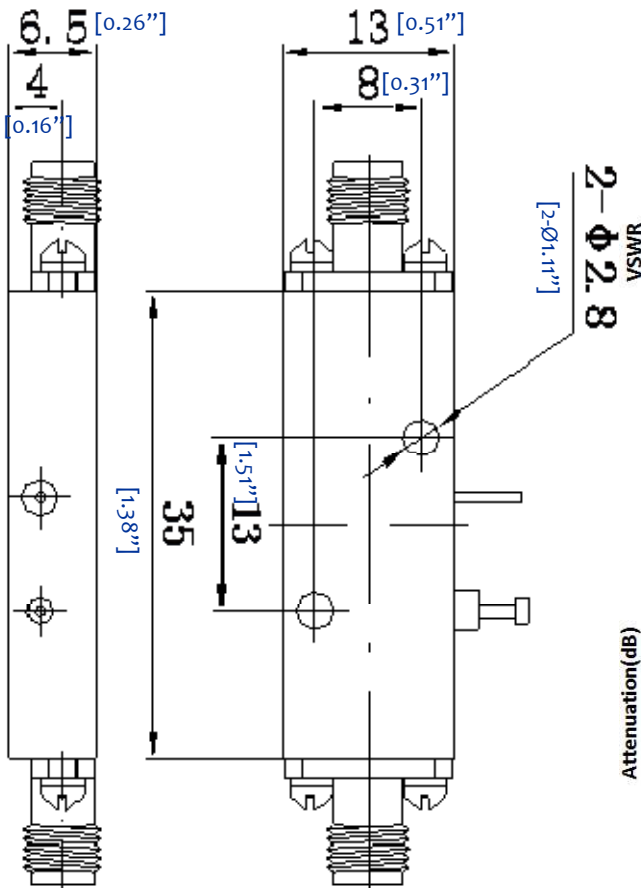

VSWR

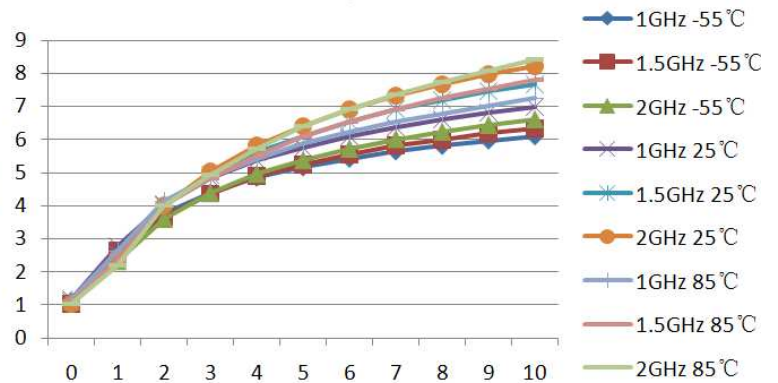

Attenuation






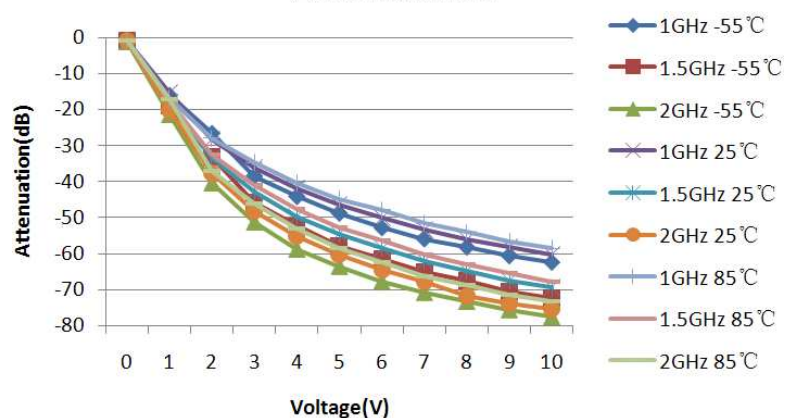




RF-LAMBDA

RFVAT0102R50

Reflective Voltage Controllable Attenuator 1-2GHz 50dB

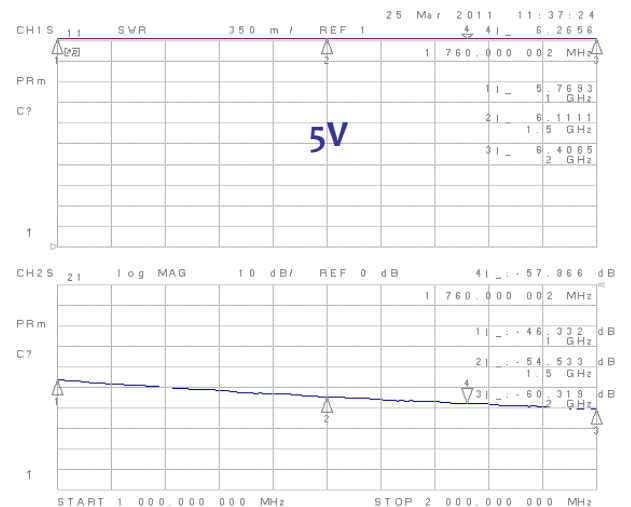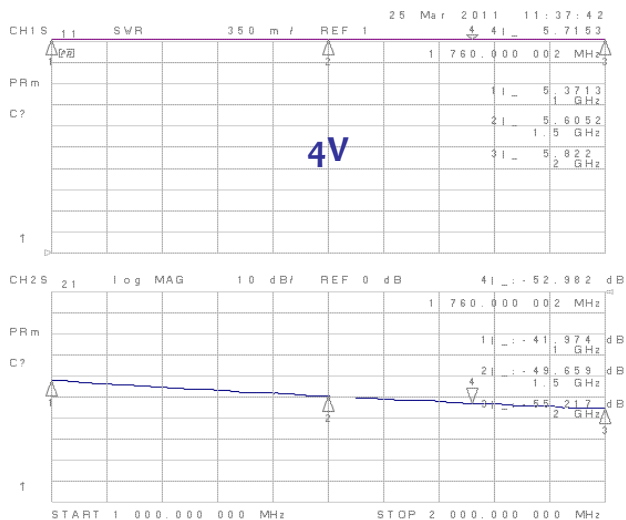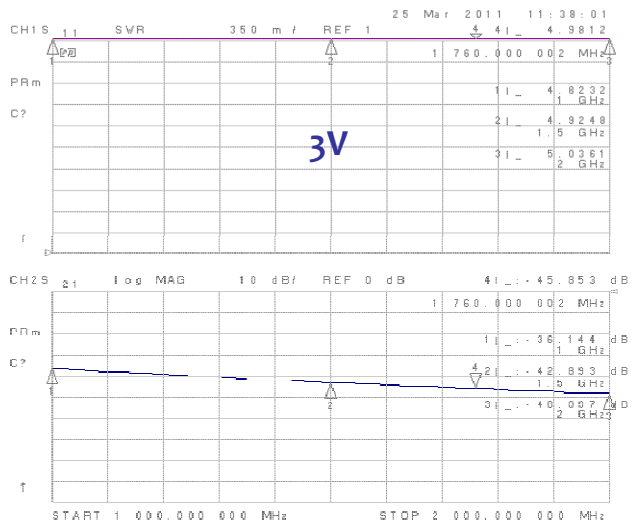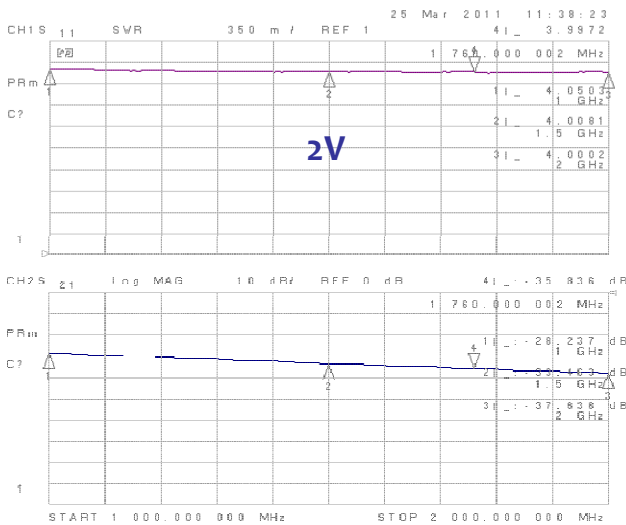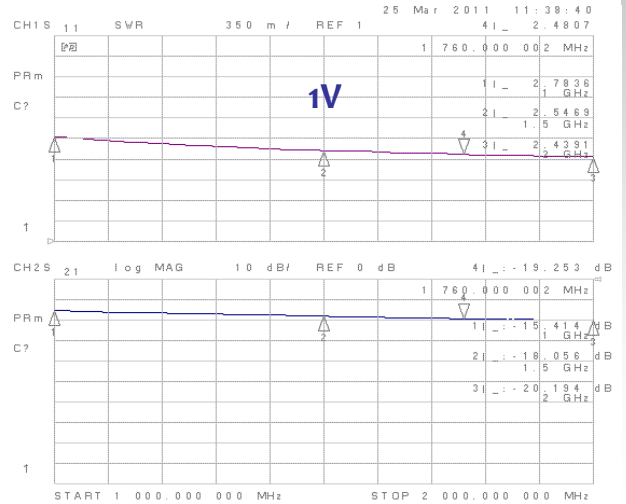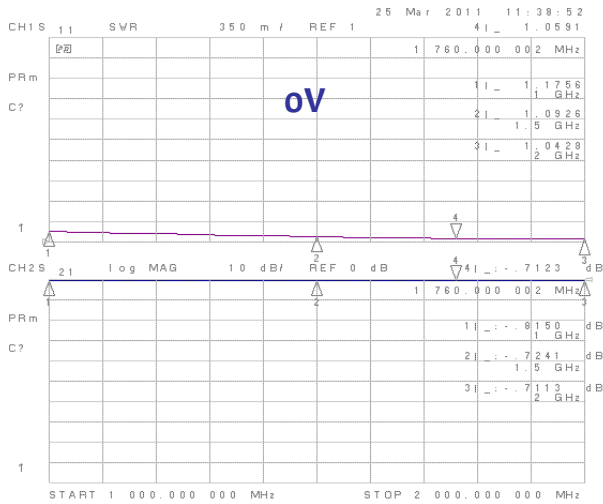



RF-LAMBDA

RFVAT0102R50

Reflective voltage Controllable Attenuator 1-2GHz 50dB

