


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

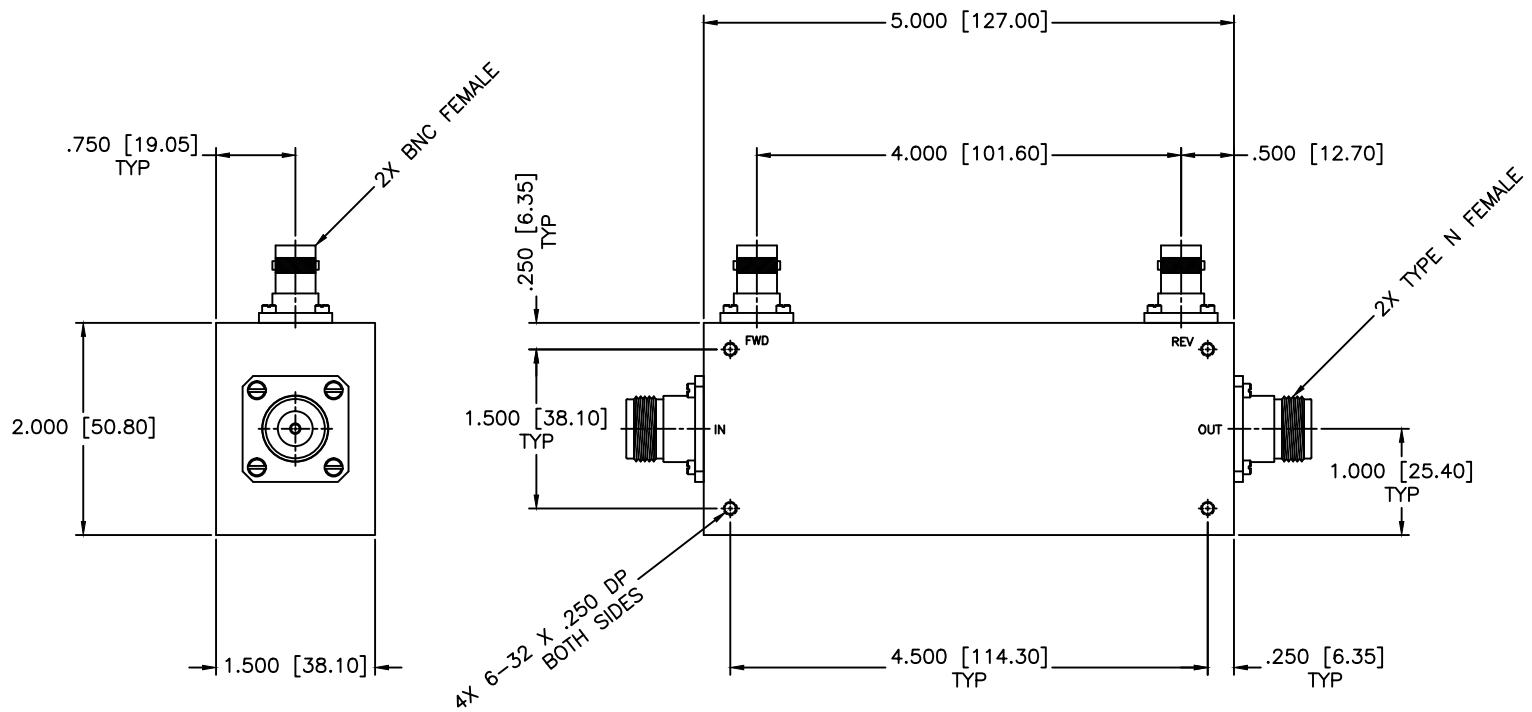

SPECIFICATIONS

FREQUENCY RANGE: 10-1000 MHz
 FREQUENCY SENSITIVITY: ±0.50dB
 INSERTION LOSS: 1.0dB Max.
 DIRECTIVITY: 20dB Min.
 VSWR PRIME LINE: 1.30:1 Max.
 POWER: 50 Watts

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.MCLI.COM		SCALE: N/A
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.02 ±.008 ANGLE: ±1/2°		SHEET: N/A
DRAWING TITLE:		30dB DUAL DIRECTIONAL COUPLER			
PART NO.:		HDL-2-30			
DRAWN: Paiboon Luekhamhan	DATE: 03-26-1999	PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		CAGE CODE:	SIZE: N/A REV: N/A DWG NO.: 81222
APPROVED: T. Nguyen	DATE: 03-26-1999			OD2L5	DO NOT SCALE THE DRAWING