


Isolator-Drop In Flange Mount, 14.00-14.50GHz

ELECTRICAL SPECIFICATION

Product Model:	VDIF-140145
Frequency Range (GHz)	14.00-14.50
Isolation ( dB ) min	20
Insertion Loss ( dB ) max	0.50
VSWR max	1.25
Average Power (W)	5
Operating Temp. Range (°C)	-40~+80

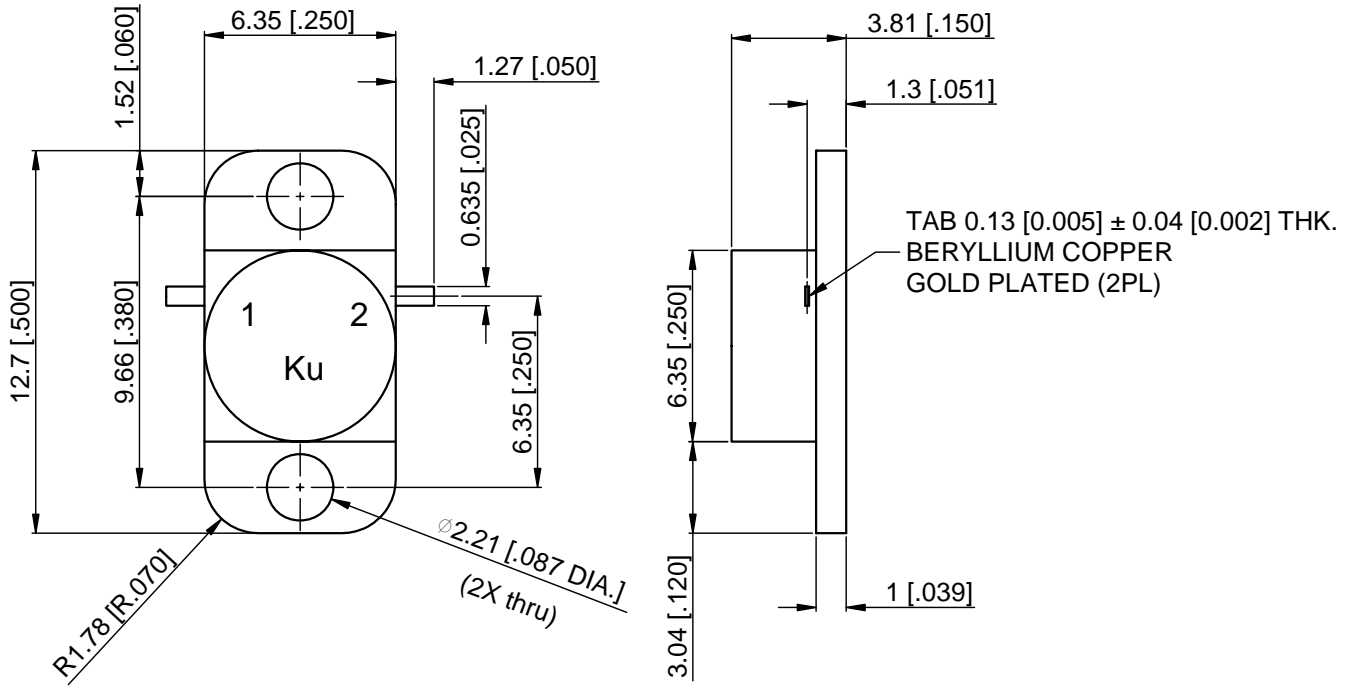

				Drawn: 01/19/12	Title: <b>Isolator-Drop In Flange Mount</b>
				Checked: 01/19/12	
Description	Ecn.No	Date	Rev	Approved: 01/19/12	



Tel:877-777-8432  
www.vidaRF.com

Unless otherwise specified dimensions are in millimeters, dimensions in [ ] are in inches for customer reference only.

Unless Otherwise Specified tolerance are:

- .XX ±0.13 [.005"]
- .X ±0.20 [.008"]
- X ±0.50 [.019"]
- .X° ±1°
- X° ±2°

Cage Code

**6KQ83**

Part No:

**VDIF-140145**

View:



Size:	Scale:	Sheet:	Rev:
A4	4:1	1/1	A