



2.92mm Female to Mini SMP Male Adapter Smooth Bore

TECHNICAL DATA SHEET

PE91128

2.92mm Female to Mini SMP Male Adapter Smooth Bore

Configuration

Connector 1	2.92mm Female
Impedance 1	50 Ohms
Connector Specification 1	MIL-STD-34B
Connector 2	Mini SMP Male
Impedance 2	50 Ohms
Adapter Design	Standard
Body Style	Straight

Electrical Specifications

Frequency Range, GHz	DC to 40
Maximum VSWR	1.25:1

Mechanical Specifications

Temperature

Operating Range, deg C	-55 to +125
------------------------	-------------

Size

Length, in [mm]	0.913 [23.19]
Width/Dia., in [mm]	0.312 [7.92]

Connector 1

Type	2.92mm Female
Inner Conductor Material and Plating	Beryllium Copper, Gold
Inner Conductor Plating Specification	MIL-G-45204, Type 1, Grade C, Class 1
Outer Conductor Material and Plating	Beryllium Copper, Gold
Outer Conductor Plating Specification	MIL-G-45204, Type 1, Grade C, Class 1
Body Material and Plating	Beryllium Copper, Gold
Body Plating Specification	MIL-G-45204, Type 1, Grade C, Class 1
Dielectric Type	PTFE

Connector 2

Type	Mini SMP Male
Inner Conductor Material and Plating	Beryllium Copper, Gold
Inner Conductor Plating Specification	MIL-G-45204, Type 1, Grade C, Class 1
Outer Conductor Material and Plating	Passivated Stainless Steel
Outer Conductor Plating Specification	AMS-QQ-P-35
Body Material and Plating	Passivated Stainless Steel
Body Plating Specification	AMS-QQ-P-35
Dielectric Type	PTFE

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.92mm Female to Mini SMP Male Adapter Smooth Bore PE91128](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.





2.92mm Female to Mini SMP Male Adapter Smooth Bore

TECHNICAL DATA SHEET

PE91128

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant

Yes

Plotted and Other Data

Notes:

Values at 25 °C, sea level

2.92mm Female to Mini SMP Male Adapter Smooth Bore from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.92mm Female to Mini SMP Male Adapter Smooth Bore PE91128](http://www.pasternack.com/2.92mm-female-mini-smp-male-straight-adapter-pe91128-p.aspx)

URL: <http://www.pasternack.com/2.92mm-female-mini-smp-male-straight-adapter-pe91128-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

PE91128 CAD Drawing

2.92mm Female to Mini SMP Male Adapter Smooth Bore

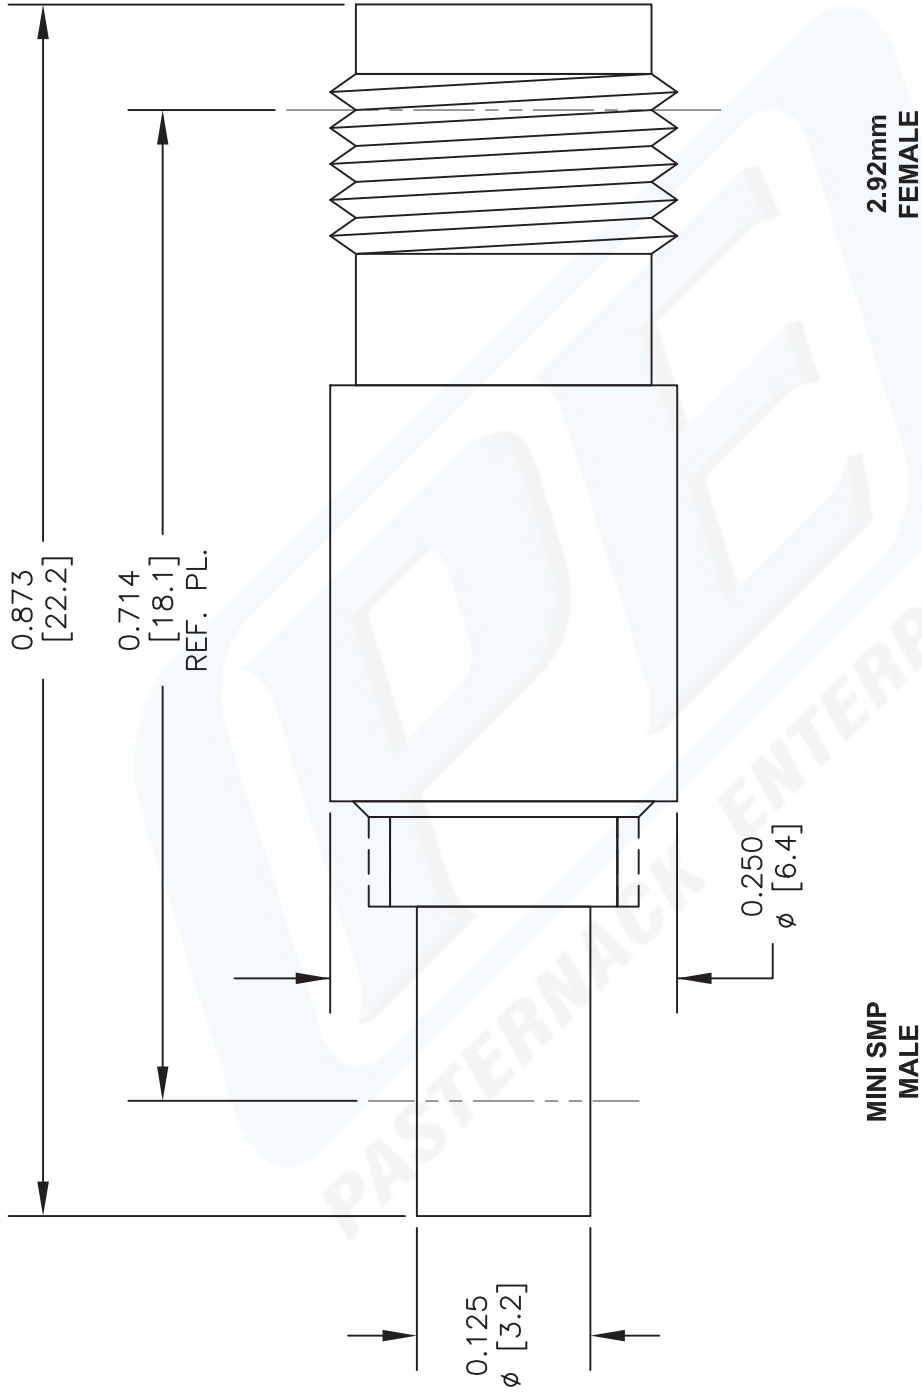

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE
PE91128

FSCM NO. 53919

CAD FILE 102813

SCALE N/A

SIZE A

2233

PE PASTERNAK®
 Pasternack Enterprises, Inc.
 P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | **Fax:** (949) 261-7451
Website: www.pasternack.com | **E-Mail:** sales@pasternack.com