




HIGH POWER BRAZED RESISTOR

2A100300

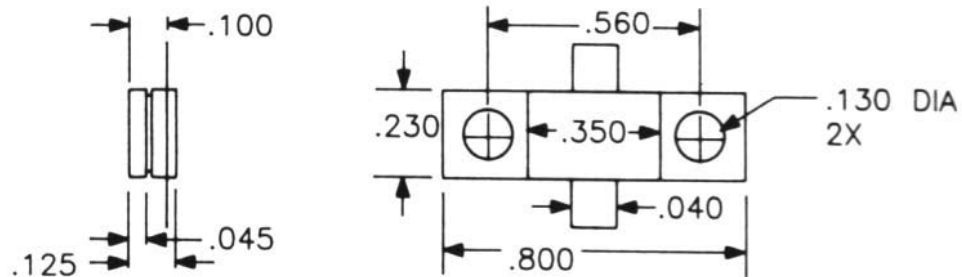

Electrical Specifications		Material Specifications		General Specifications	
RFT P/N	2A100300	Substrate	BeO	Mechanical Tolerance	±.010"
Power (Watt)	100	Flange	Copper with Nickel Plating	Tolerance (dB)	DC – 1 GHz: ± .5 1 – 2 GHz: ± 2
Attenuation (dB)	30	Tab	Nickel with Silver plating	Power Handling	100@ 100°C 0 W @ 250 °C
Frequency (GHz)	2	Cover	Alumina	Construction	Brazed
VSWR	DC - 1 GHz: 1.25:1 1-2 GHz: 1.35:1	Resistive Element	NiChrome	RoHS Compliance	Yes