





Standards
NF C 96-315
MIL-DTL-3933

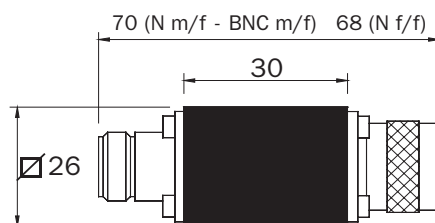

Impedance 50 Ω ± 5%
 Frequency DC - 2.5 GHz
 Max VSWR ≤ 1.20 at 1 GHz, ≤ 1.30 at 2 GHz
 Temperature range -55 to +125°C
 Average power @ 25°C 6 W
 Weight 110 g

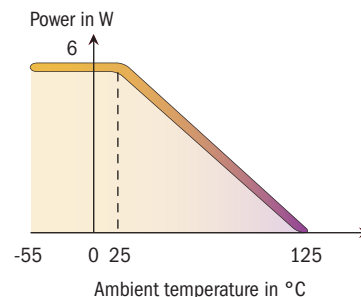

Dimensions in mm

| Attenuation (dB) | P/N (N m/f) | P/N (N f/f) | P/N (BNC m/f) | P/N (7-16 m/f) | Accuracy* ±Δα (dB) |
|------------------|-------------|-------------|---------------|----------------|--------------------|
| 1 | 16-0051 | 16-0045 | 16-3269 | 16-6748 | 0.2 |
| 3 | 16-3553 | 16-0047 | 16-3271 | 16-6689 | 0.3 |
| 6 | 16-3107 | 16-0048 | 16-3273 | 16-6713 | 0.3 |
| 10 | 16-3106 | 16-0097 | 16-3559 | 16-6714 | 0.4 |
| 20 | 16-4496 | 16-0099 | 16-3560 | 16-6715 | 0.6 |
| 30 | 16-4497 | 16-0100 | 16-0084 | 16-6707 | 0.8 |
| 40 | 16-4498 | 16-0101 | 16-0085 | 16-6717 | 1 |

* at 2 GHz

Others connectors on request

