


## Features

- -6dBm Output Level at 915 MHz
- Channel Step Size : 200 kHz
- 2<sup>nd</sup> Harmonic : < - 45dBc
- Spurious Level : < - 75dBc
- Lock Time : < 200us
- 30mA Current Consumption
- Strip-line Resonator

## Description

The plerow™ PLL synthesizer module was designed for use in wireless and wireline systems in a wide range of frequency from 50 MHz to 6 GHz. ASB's PLL provides exceptionally low spurious and phase noise performance with fast locking time and low current consumption. All products are available in a surface-mount type package.



## Specifications

| Parameter                 | Unit   | Min.                  | Typical | Max. |
|---------------------------|--------|-----------------------|---------|------|
| Frequency Range           | MHz    | 900                   | 915     | 930  |
| Output Power              | dBm    |                       | -6      |      |
| Supply Voltage            | V      |                       | 5       |      |
| Current Consumption       | mA     |                       |         | 30   |
| Channel Step Size         | kHz    |                       | 200     |      |
| 2 <sup>nd</sup> Harmonics | dBc    |                       | -45     | -35  |
| Spurious Level            | dBc    |                       |         | -75  |
| Lock Time                 | us     |                       |         | 200  |
| Reference Frequency       | MHz    |                       | 10      |      |
| Reference Input Level     | dBm    |                       | 0       | 5    |
| Phase Noise (C / N)       |        |                       |         |      |
| @ 1 kHz                   |        |                       |         |      |
| @ 10 kHz                  | dBc/Hz | -110                  | -107    | -104 |
| @ 100 kHz                 |        | -124                  | -121    | -118 |
| Output Impedance          | Ω      |                       | 50      |      |
| Operating Temp. Range     | °C     | -40                   | 25      | 85   |
| Package Type & Size       | mm     | SMT, 19.0W×19.0L×5.8H |         |      |

1) Measurement conditions are as follows: T = 25°C, V<sub>CC</sub> = 5.0 V, Freq. = 915 MHz, 50 ohm system.

## More Information

Website: [www.asb.co.kr](http://www.asb.co.kr)  
 E-mail: [sales@asb.co.kr](mailto:sales@asb.co.kr)


Tel: (82) 42-528-7220  
 Fax: (82) 42-528-7222

ASB Inc., 4th Fl. Venture Town  
 Bldg., 367-17 Gojeong-Dong,  
 Seo-Gu, Daejeon 302-716, Korea

## Outline Drawing

### APL0000 Type

| Type                    | Dimension     |
|-------------------------|---------------|
| Standard (PLL IC + VCO) | 19 x 19 x 5.8 |

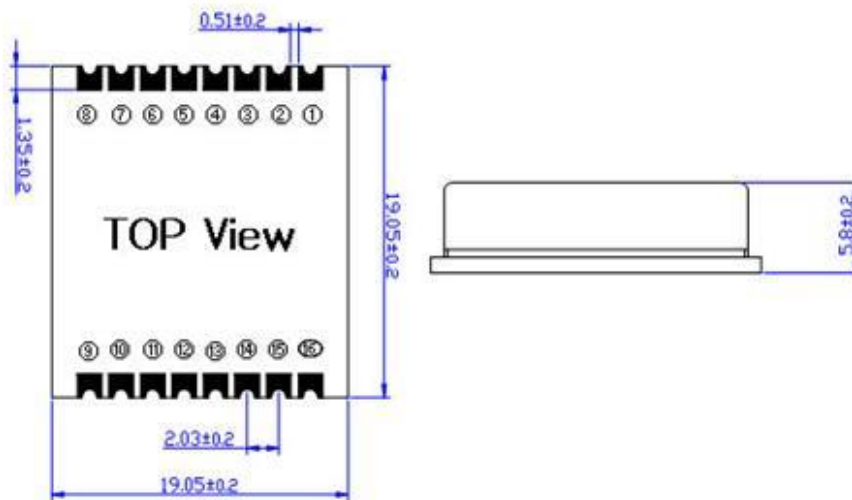

| Pin Out for PLL             |             |         |             |
|-----------------------------|-------------|---------|-------------|
| Pin No.                     | Application | Pin No. | Application |
| 1                           | CLOCK       | 9       | VCC (VCO)   |
| 2                           | DATA        | 13      | RF OUT      |
| 3                           | ENABLE      | 15      | VCC (PLL)   |
| 4                           | OSC IN      | 16      | LOCK DETECT |
| All other Pins are Grounded |             |         |             |

