


Uncontrolled Drawing

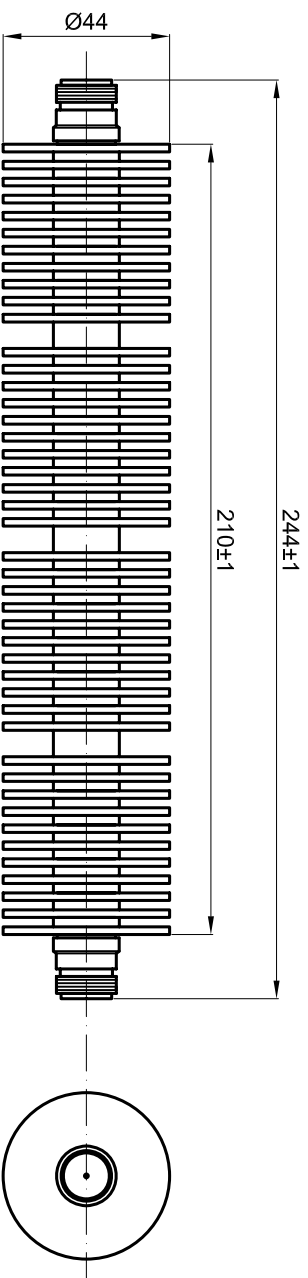

1. Model: 20A-1006-44
2. Nominal Impedance: 50Ω
3. Frequency Range: DC-6GHz
4. Nominal Attenuation & Error:  $20 \pm 1.0 \text{ dB} @ \text{DC-4GHz}$ ,  $20 \pm 1.0 \text{ dB} @ \text{4-6GHz}$
5. VSWR:  $1.25 @ \text{DC-4GHz}$ ,  $1.35 @ \text{4-6GHz}$
6. Power Rating: 100W (CW)
7. Connector: Nf-Nf; Stainless Steel, gold plated beryllium copper contacts

参量项目	数量	规格/名称、单位、材料标准等	图号	525.0907
设计	DESIGNED_	ZYY	文件名称	FILENAME
校对	CHECKED_	ZH	日期	10/7/2
审核 - 日期	APPROVED_		比例	1:2

**BXT**  
RF Technologies

BXT Technologies  
Tel:0591-83789500  
www.bxt-technologies.cn

20A/100W/6GHz/Nf-Nf Attenuator  
20A-1006-44

版本 EDITION  
图框 SHEET