



30 dB Fixed Attenuator, 7/16 DIN Male To 7/16
DIN Female Aluminum Heatsink Black Anodized
Body Rated To 25 Watts Up To 7.5 GHz

TECHNICAL DATA SHEET

PE7041-30

**30 dB Fixed Attenuator, 7/16 DIN Male To 7/16 DIN Female Aluminum Heatsink Black Anodized Body
Rated To 25 Watts Up To 7.5 GHz**

Configuration

Design	Fixed, Bidirectional Attenuator
Connector 1	7/16 DIN Male
Connector 2	7/16 DIN Female
Body Material and Plating	Aluminum Heatsink, Black Anodized

Electrical Specifications

Frequency Range, GHz	DC to 7.5
Impedance, Ohms	50
Attenuation Value, dB	30
Maximum Input Power, Watts	25
Maximum VSWR	1.45:1

Frequency 1

Range, GHz	DC to 4
VSWR	1.25:1
Attenuation Accuracy, dB	± 1.5

Frequency 2

Range, GHz	4 to 7.5
VSWR	1.45:1
Attenuation Accuracy, dB	± 1.5

Mechanical Specifications

Size

Length, in [mm]	5.55 [140.97]
Width, in [mm]	2.65 [67.31]
Height, in [mm]	2.65 [67.31]

Connector 1

Type	7/16 DIN Male
Hex Size, in.	1 1/4
Torque, ft-lbs [Nm]	18.417 [24.97]

Connector 2

Type	7/16 DIN Female
------	-----------------

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [30 dB Fixed Attenuator, 7/16 DIN Male To 7/16 DIN Female Aluminum Heatsink Black Anodized Body Rated To 25 Watts Up To 7.5 GHz PE7041-30](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



30 dB Fixed Attenuator, 7/16 DIN Male To 7/16
DIN Female Aluminum Heatsink Black Anodized
Body Rated To 25 Watts Up To 7.5 GHz

TECHNICAL DATA SHEET

PE7041-30

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant

Yes

Plotted and Other Data

Notes:

Values at 25 °C, sea level

30 dB Fixed Attenuator, 7/16 DIN Male To 7/16 DIN Female Aluminum Heatsink Black Anodized Body Rated To 25 Watts Up To 7.5 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [30 dB Fixed Attenuator, 7/16 DIN Male To 7/16 DIN Female Aluminum Heatsink Black Anodized Body Rated To 25 Watts Up To 7.5 GHz PE7041-30](http://www.pasternack.com/30db-fixed-7-16-male-7-16-female-25-watts-attenuator-pe7041-30-p.aspx)

URL: <http://www.pasternack.com/30db-fixed-7-16-male-7-16-female-25-watts-attenuator-pe7041-30-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

PE7041-30 CAD Drawing

30 dB Fixed Attenuator, 7/16 DIN Male To 7/16 DIN Female Aluminum
Heatsink Black Anodized Body Rated To 25 Watts Up To 7.5 GHz

P/N	ATTEN.	FIGURE
PE7041-1	1 dB	1
PE7041-2	2 dB	1
PE7041-3	3 dB	1
PE7041-6	6 dB	1
PE7041-10	10 dB	1
PE7041-20	20 dB	1
PE7041-30	30 dB	1
PE7041-40	40 dB	1

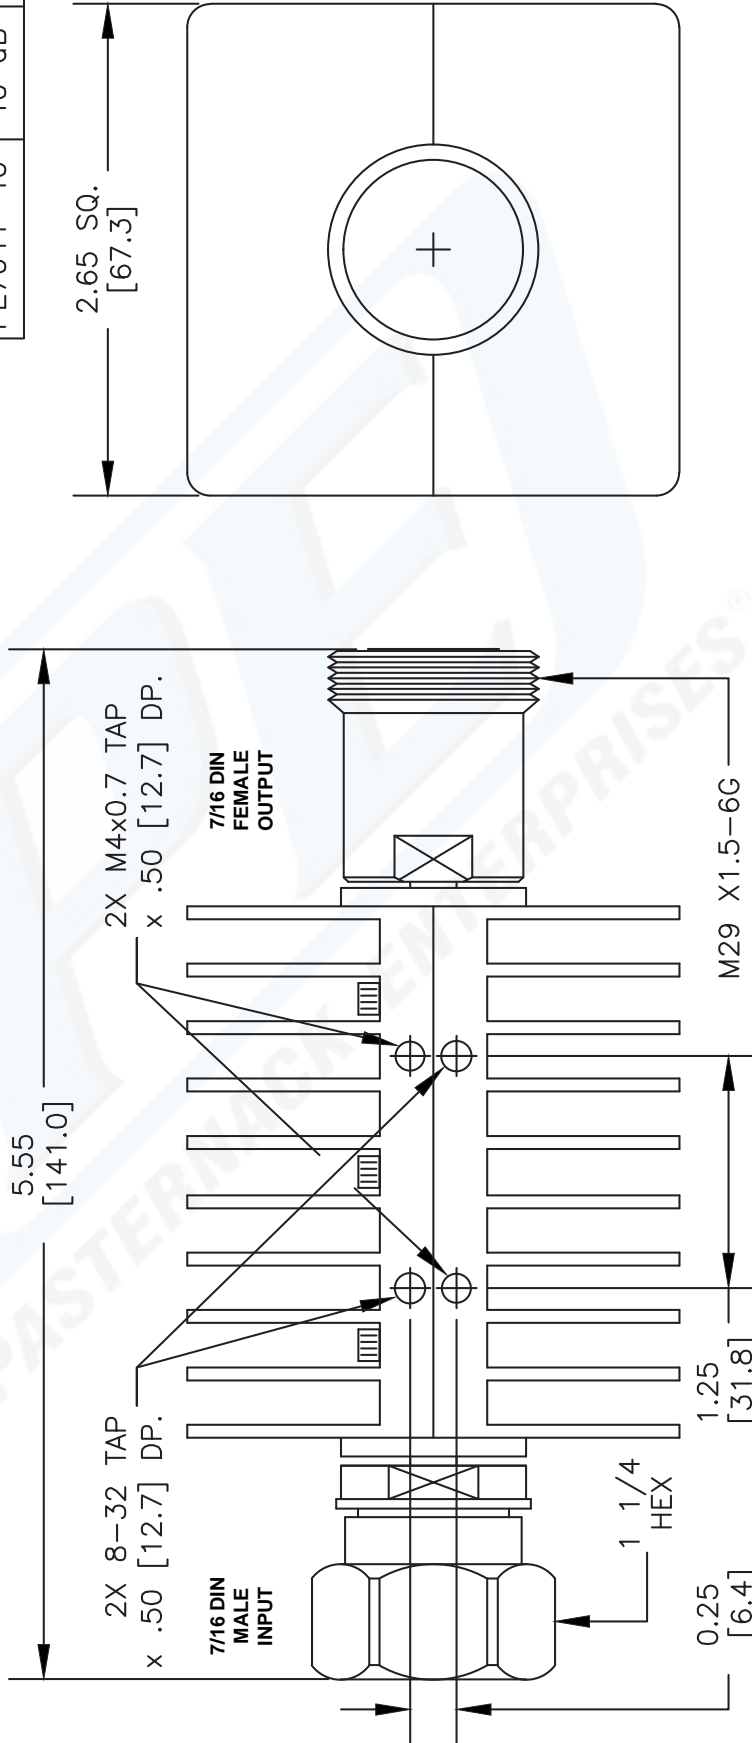


FIGURE 1

- NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE

PE7041

PE PASTERNAK®

Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com

FSCM NO. 53919

CAD FILE 020113

SCALE N/A

SIZE A

2231