



## 0.8-3.5GHz 300W High Power 4-Way Power Divider

Very small package

Excellent phase and amplitude balance

Bi-Directional as divider and combiner \*

Low Insertion loss and high isolation

Standard: MIL E-5400, MIL E -16400


High power handling capability

\* 300W average input when work as combiner.



Electrical Specifications				
Frequency Range (MHz)	Insertion Loss (dB. max)	Isolation (dB. min)	VSWR	Working Temp. Range (° C)
800~3500	0.25	6 (as combiner)	1.25:1	-25~+70
Average Power (W)	Peak Power (KW)	Connector	Storage Temp. Range (° C)	Dimension unit
300(CW)	3	N-F	-40~+70	mm [inch]



### Insertion loss

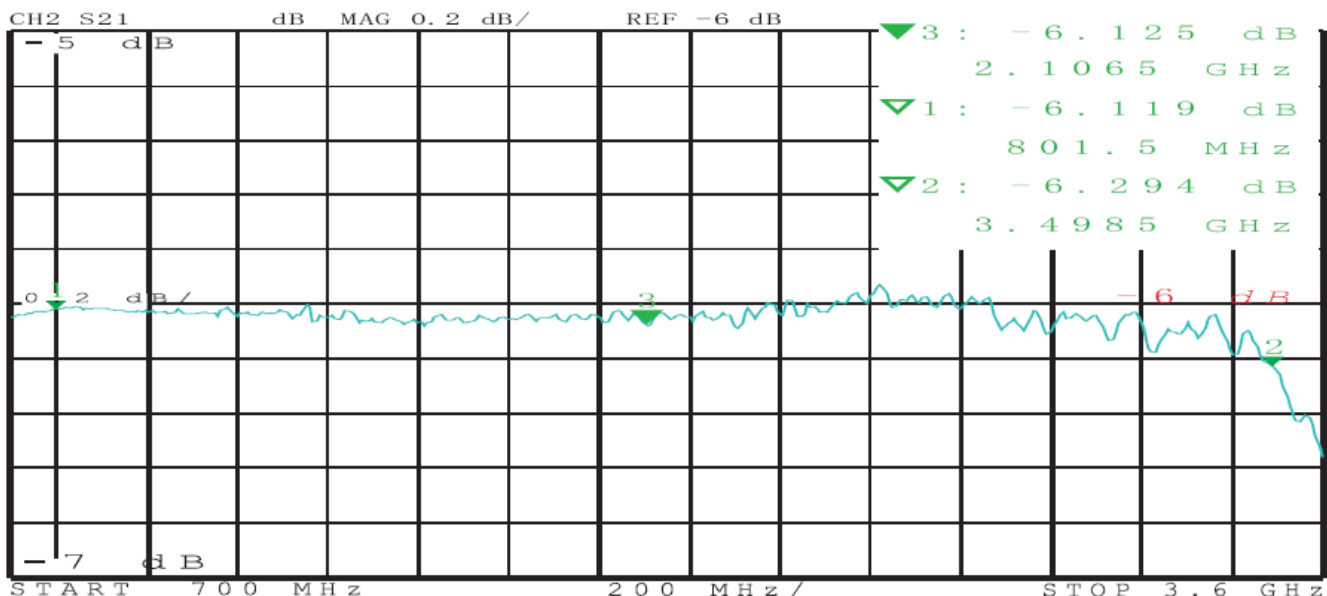

0.8-3.5GHz 300W High Power 4-Way Power Divider



### VSWR(in)

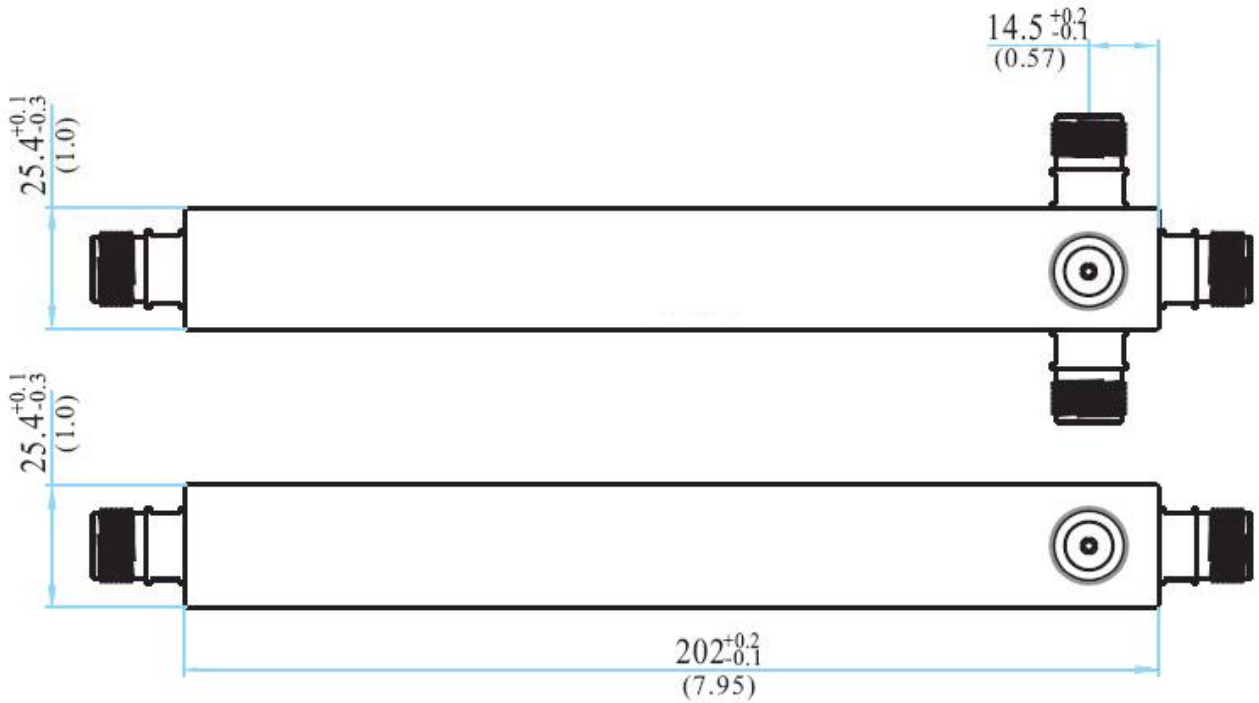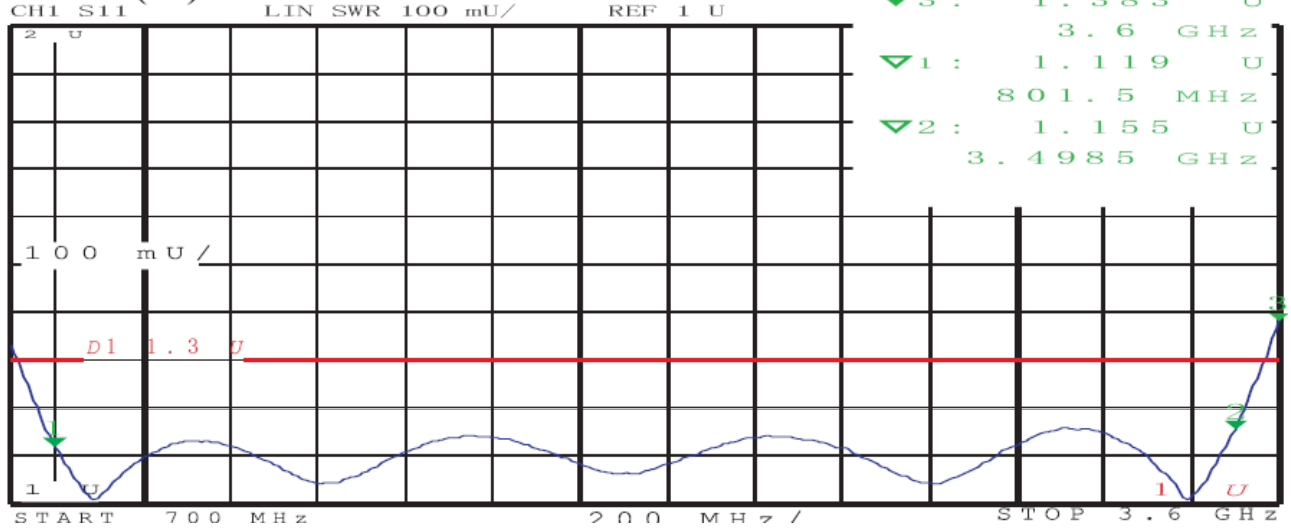

0.8-3.5GHz 300W High Power 4-Way Power Divider