

SMA/SMA BULKHEAD ADAPTER 18GHZ

SM4954, SM4955

SPECIFICATIONS

ELECTRICAL

50 OHMS

VSWR 1.15:1 MAX @ 18 GHZ

FREQUENCY: 0-18 GHZ

MECHANICAL

500 CYCLES MIN

7-9 IN-LBS COUPLING NUT MATING TORQUE

OPERATING TEMPERATURE:

-55 DEG C TO +100 DEG C

MATERIALS SM4954 AU PLATED STAINLESS STEEL
SM4955 PASSIVATED STAINLESS STEEL

BODY: SST ASTM A484 / A582


BeCu ATSM-B-196

CENTER CONTACTS Au PLATED MIL-G-45204

INSULATOR: TEFLON


INTERFACE: MIL-STD-348

ROHS COMPLIANT

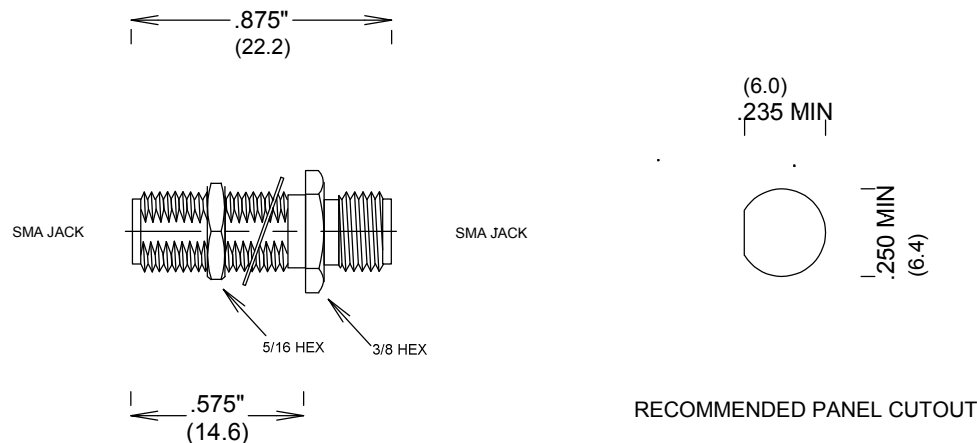

SM4954 AU PLATED
SM4955 PASSIVATED

MEASUREMENTS BELOW ARE TYPICAL

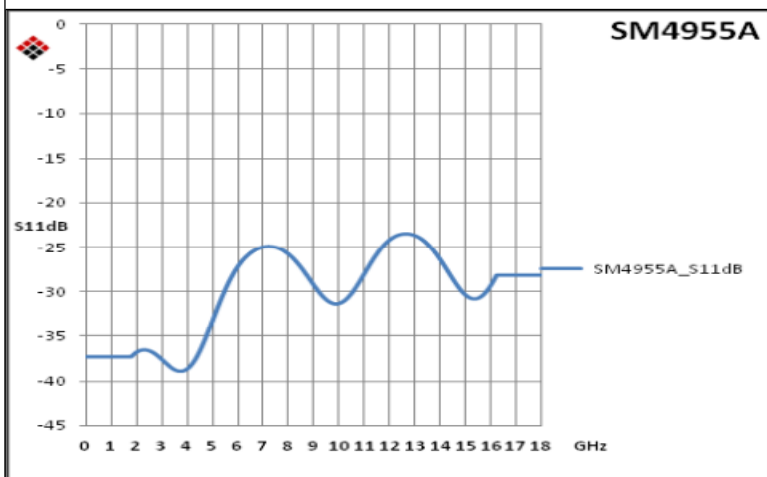

ALL DIMENSIONS IN inches(MM) Typical

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

SMA/SMA BULKHEAD ADAPTER 18GHZ

| SIZE | CAGE CODE | DWG NO | REV |
|-------|-----------|----------------|-----|
| A | 3FKR5 | SM4954, SM4955 | A |
| SCALE | SHEET | | |