





Standards  
NF C 96-315  
MIL-DTL-3933

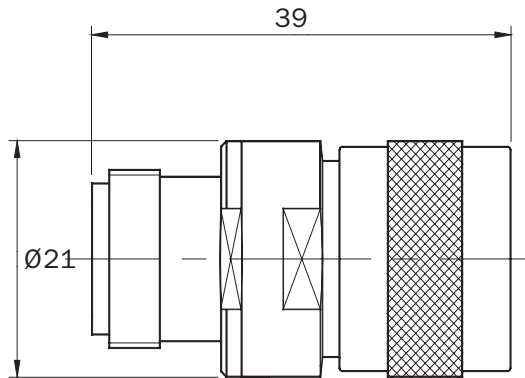

Impedance	50 Ω ± 5%
Frequency	DC - 2.5 GHz
Max VSWR	≤ 1.20 at 1 GHz, ≤ 1.30 at 2 GHz
Temperature range	-55 to +125°C
Average power @ 25°C	2 W
Weight	55 g

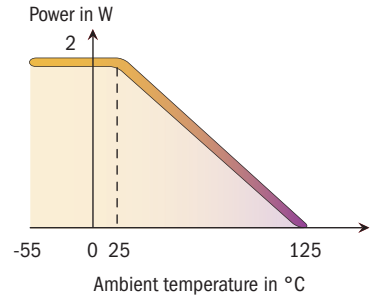

Dimensions in mm

Attenuation (dB)	P/N (N m/f)	Accuracy* ±Δα (dB)
1	16-6688	0.3
3	16-6571	0.3
4	16-6844	0.3
6	16-6572	0.3
10	16-6573	0.4
12	16-6579	0.5
16	16-6578	0.8
20	16-6526	1
30	16-6764	1.5

\* at 2 GHz

Others connectors on request

