

3 dB Fixed Attenuator, N Male To N Female Black Anodized Aluminum Heatsink Body Rated To 100 Watts Up To 4 GHz



TECHNICAL DATA SHEET

PE7421-3

Configuration Design

Connector 1 Connector 2 Body Material and Plating Fixed, Bidirectional Attenuator N Male N Female Black Anodized Aluminum Heatsink

Electrical Specifications * Values at 25°C, sea level

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		4	GHz
Impedance		50		Ohms
Attenuation Value		3		dB
Input Power			100	Watts
VSWR			1.2:1	

Mechanical Specifications

Width

3 in [76.2 mm]

Connectors

Description	Connector 1	Connector 2	
Туре	N Male	N Female	
Contact Material and Plating	Beryllium Copper, Gold	Beryllium Copper, Gold	
Outer Conductor Material and Plating		Passivated Stainless Steel	
Coupling Nut Material and Plating	Passivated Stainless Steel		
Body Material and Plating	Passivated Stainless Steel Passivated Stainless Steel		

Compliance Certifications (visit www.Pasternack.com for current document) RoHS Compliant

Plotted and Other Data

Notes:

- Values at 25 °C, sea level
- Power Derating (-20 C to +125 C): 100 W to 2.5 W

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 3 dB Fixed Attenuator, N Male To N Female Black Anodized Aluminum Heatsink Body Rated To 100 Watts Up To 4 GHz PE7421-3






3 dB Fixed Attenuator, N Male To N Female Black Anodized Aluminum Heatsink Body Rated To 100 Watts Up To 4 GHz

TECHNICAL DATA SHEET

PE7421-3

Outline Drawing

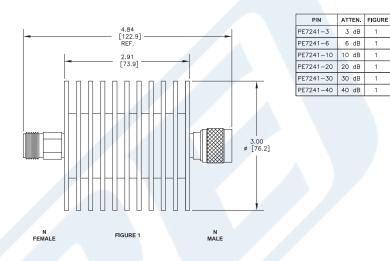

3 dB Fixed Attenuator, N Male To N Female Black Anodized Aluminum Heatsink Body Rated To 100 Watts Up To 4 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 3 dB Fixed Attenuator, N Male To N Female Black Anodized Aluminum Heatsink Body Rated To 100 Watts Up To 4 GHz PE7421-3

URL: http://www.pasternack.com/3db-fixed-n-male-n-female-100-watts-attenuator-pe7421-3-p.aspx

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 **Phone:** (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451 Sales@Pasternack.com • Techsupport@Pasternack.com



