



## HIGH POWER 8-Way POWER DIVIDER 800-2500MHZ




### Wide Band Power Divider

- Very small package
- Excellent phase and amplitude balance
- Bi-Directional as divider and combiner \*
- Low Insertion loss and high isolation
- Standard: MIL E-5400, MIL E-16400
- High power handling capability

RFHT8W08022 8-Way Power Divider 800-2500MHZ

Electrical Specifications						
Frequency Range (MHz)	Insertion Loss (dB. max)	Isolation (dB. min)	Phase Unbalance (° )	Amplitude Unbalance (dB)	VSWR	Working Temp. Range (° C)
800~2500	0.3	20	3.0	0.3	1.30:1	-25~+55
Average Power (W)	Peak Power (KW)	Reverse Power (W)	Impedance (Ω)	Connector	Relative Humidity	Dimension unit
100(CW)	1	10W /port	50	N-F	0%~90%	mm [inch]

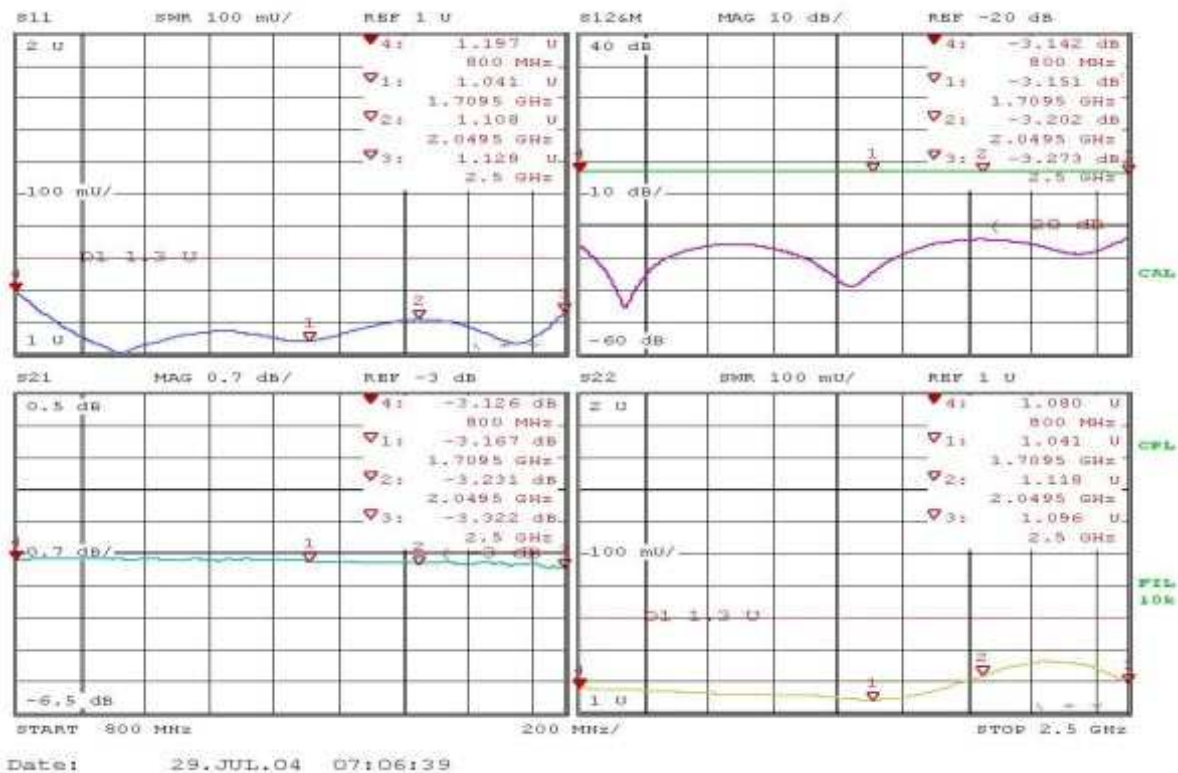




# RF-LAMBDA

The power beyond expectations

RFHT8W08022

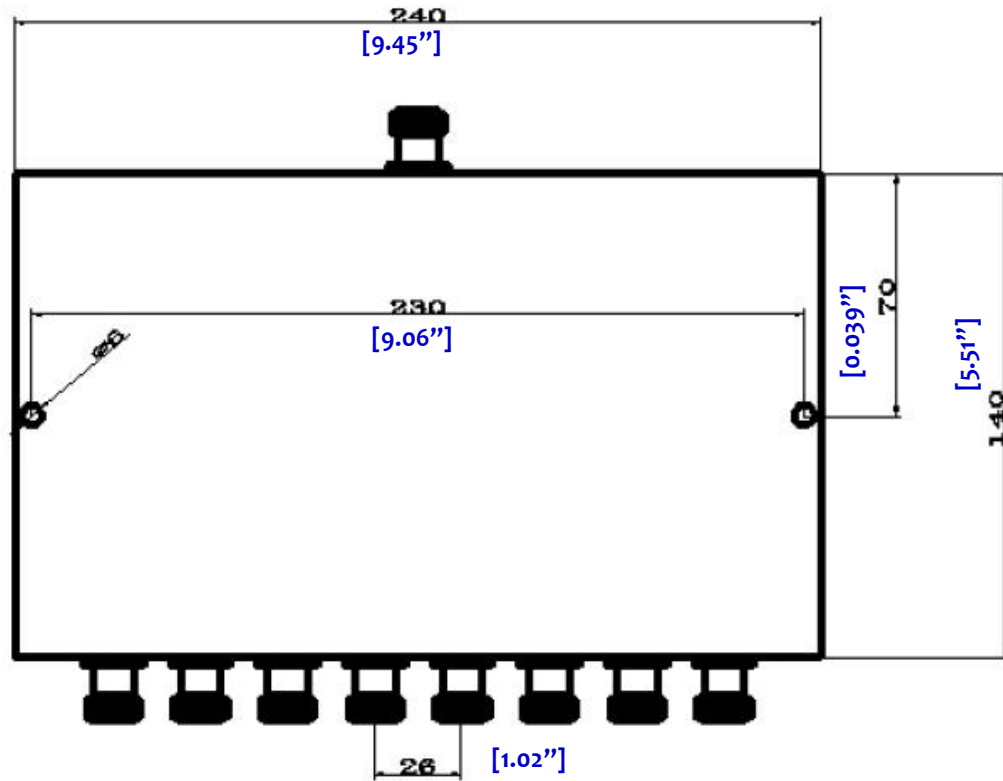

RFHT8W08022 8-Way Power Divider