


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

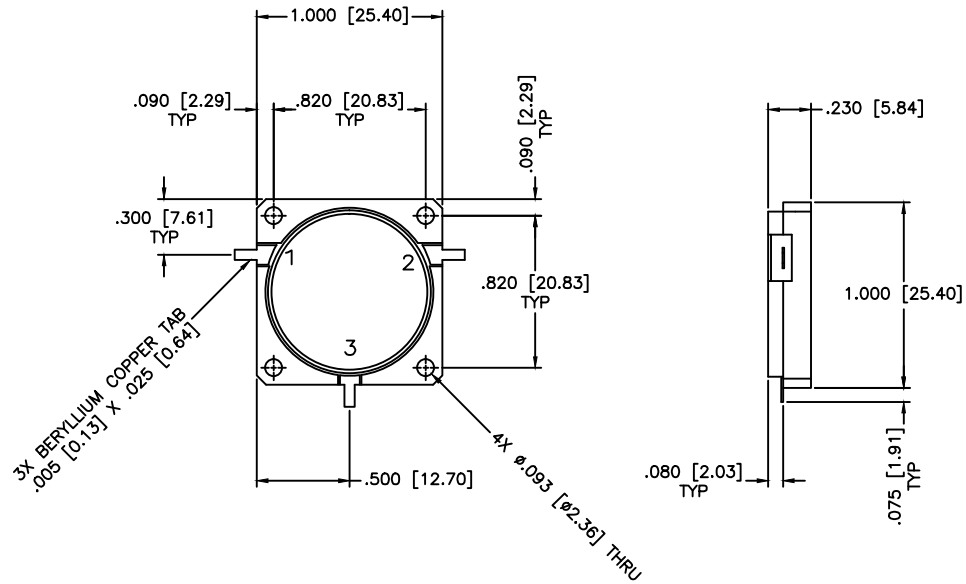

SPECIFICATIONS

Frequency Range: 1.2–1.4 GHz
 Insertion Loss: 0.4dB Max.
 Isolation: 20dB Min.
 VSWR: 1.25:1 Max.
 Impedance Nominal: 50 Ohms
 Power Rating: 50 Watts
 Operating Temperature: –40°C to +65°C
 Storage Temperature: –55°C to +100°C

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: OUTLINE DRAWING		
DRAWN: Paiboon Luekhamhan		PART NO.: MC-2		
DATE: 01-02-2008		CAGE CODE: OD2L5		
APPROVED: T. Nguyen		SIZE: A		
DATE: 01-02-2008		REV: N/A		
THIRD ANGLE PROJECTION		DWG. NO.: 83028		
		DO NOT SCALE THE DRAWING		