




20 - 50 W SMA



Standards
NF C 96-315
MIL-DTL-3933



Impedance	50 Ω ± 5%
Frequency	DC-3.1 GHz
Max VSWR	≤1.20 at 3.1 GHz
Temperature range	-55 to +125°C
Average power @ 25°C	20 W (without heat sink) 50 W (with heat sink)
Weight	40 g

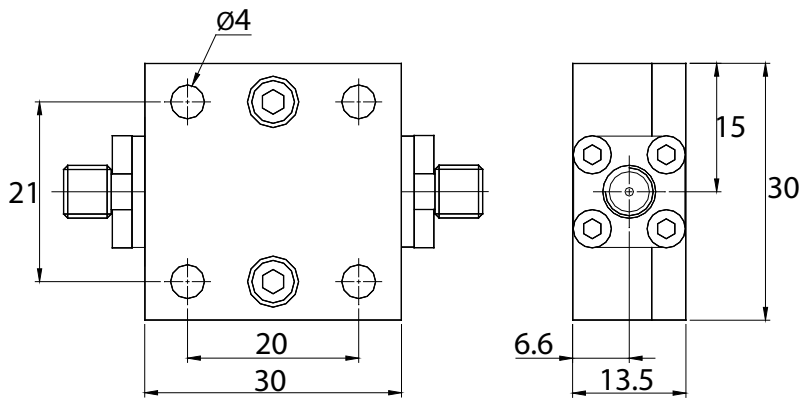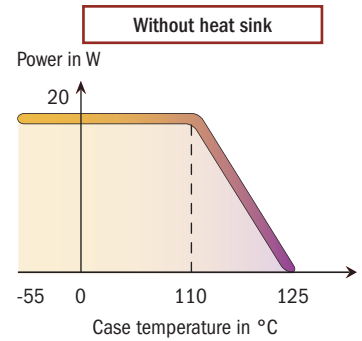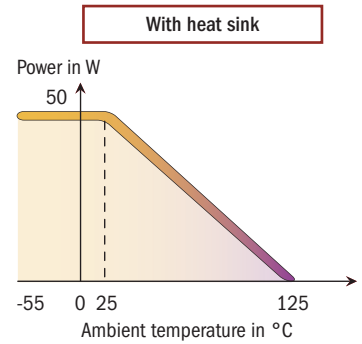

Dimensions in mm

Attenuation (dB)	P/N (SMA f/f)	Accuracy ±Δα (dB)
3	16-6826	0.4

Others attenuations on request

