

SMA F'S ISOLATOR 1.7-2.4 GHZ

SFI1724S

SPECIFICATIONS

ELECTRICAL

FREQUENCY: 1.7-2.4 GHZ
IMPEDANCE: 50 OHMS
VSWR: 1.3:1
INSERTION LOSS: 0.5 DB
AVG POWER: 10 W FORWARD @ CW
AVG POWER: 1 W REVERSE @ CW
ISOLATION: 20 DB


MECHANICAL

MATERIAL CONNECTORS: PASS. STAINLESS STEEL
MATERIAL CONTACTS: Au PLATED BeCu


OPERATING TEMPERATURE: 25°C

ROHS COMPLIANT

DIRECTION: FROM LEFT TO RIGHT

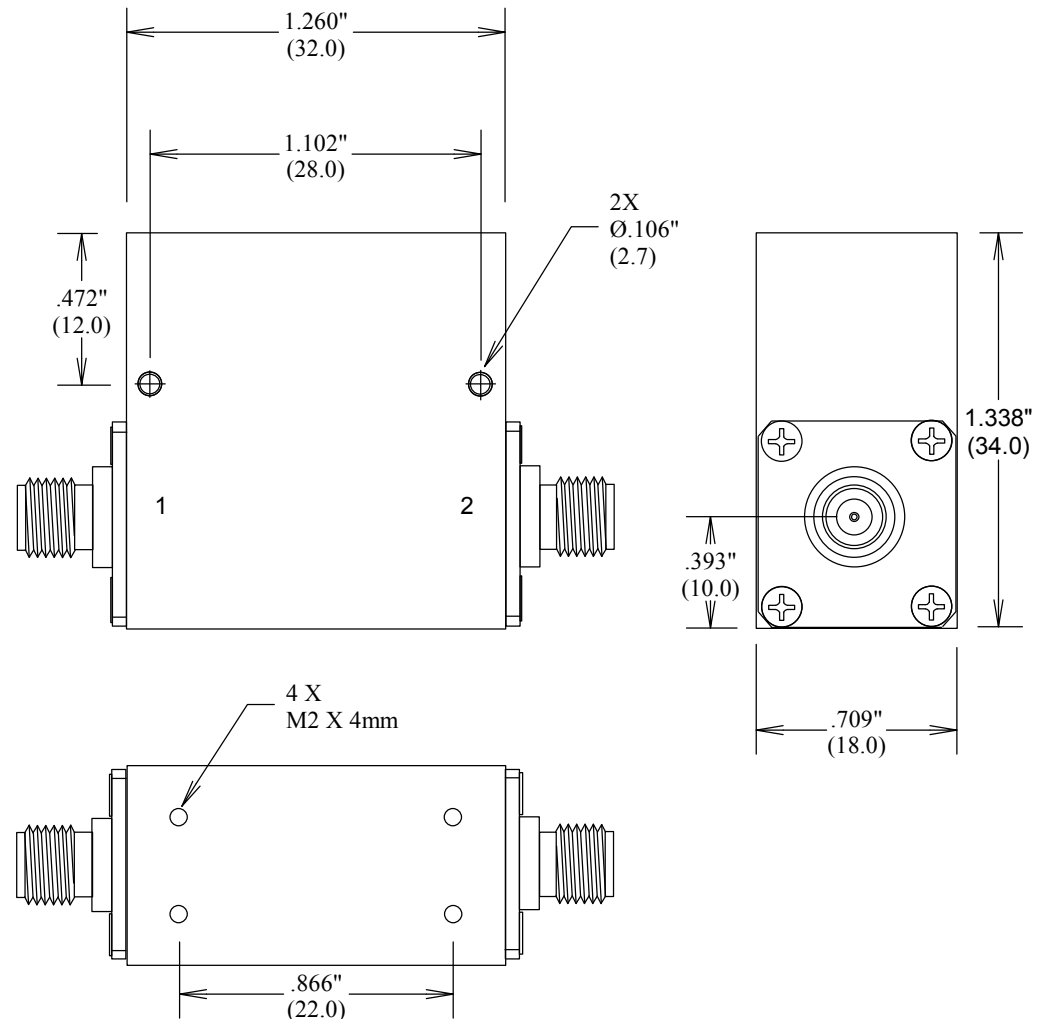

MEASUREMENTS BELOW ARE TYPICAL

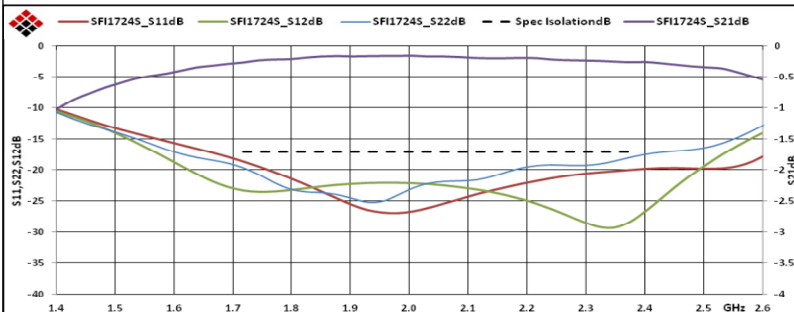

ALL DIMENSIONS IN inches(MM) Typical

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

SMA F'S ISOLATOR 1.7-2.4 GHZ

SIZE

A

CAGE CODE

3FKR5

DWG NO

SFI1724S

REV

A

SCALE

SHEET