

**RA SMP Female Connector Solder Attachment For
.047 SR Cable Up To 8 GHz**

Configuration

Connector SMP Female

Electrical Specifications*

Description	Min	Typ	Max	Units
Frequency Range	DC		8	GHz
Impedance		50		Ohms
VSWR			1.1:1	

* Values at 25°C, sea level

Mechanical Specifications

Temperature

Operating Range -55 to +155 deg C

Size

Length 0.28 in [7.11 mm]
Width/Dia. 0.187 in [4.75 mm]

Connector

Type SMP Female
Contact Material and Plating Beryllium Copper, Gold
Contact Plating Specification MIL-DTL-45204
Body Material and Plating Beryllium Copper, Gold
Body Plating Specification MIL-DTL-45204
Dielectric Type PTFE

Compliance Certifications (visit www.FairviewMicrowave.com for current document)

RoHS Compliant Yes

Plotted and Other Data

Notes:

- Values at +25 °C, sea level
- GPO® is a Registered Trademark of Corning Gilbert Inc.

RA SMP Female Connector Solder Attachment For .047 SR Cable Up To 8 GHz from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [RA SMP Female Connector Solder Attachment For .047 SR Cable Up To 8 GHz SC5183](http://www.fairviewmicrowave.com/smp-female-standard-.047-sr-connector-sc5183-p.aspx)

URL: <http://www.fairviewmicrowave.com/smp-female-standard-.047-sr-connector-sc5183-p.aspx>


The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.



Features:

- Specification: MIL-STD-348A
- Interface: .047 SR
- Attachment: Solder
- Body Style: Right Angle

Fairview Microwave
1130 Junction Dr. #100
Allen, TX 75013
Tel: 1-800-715-4396 / (972) 649-6678
Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com

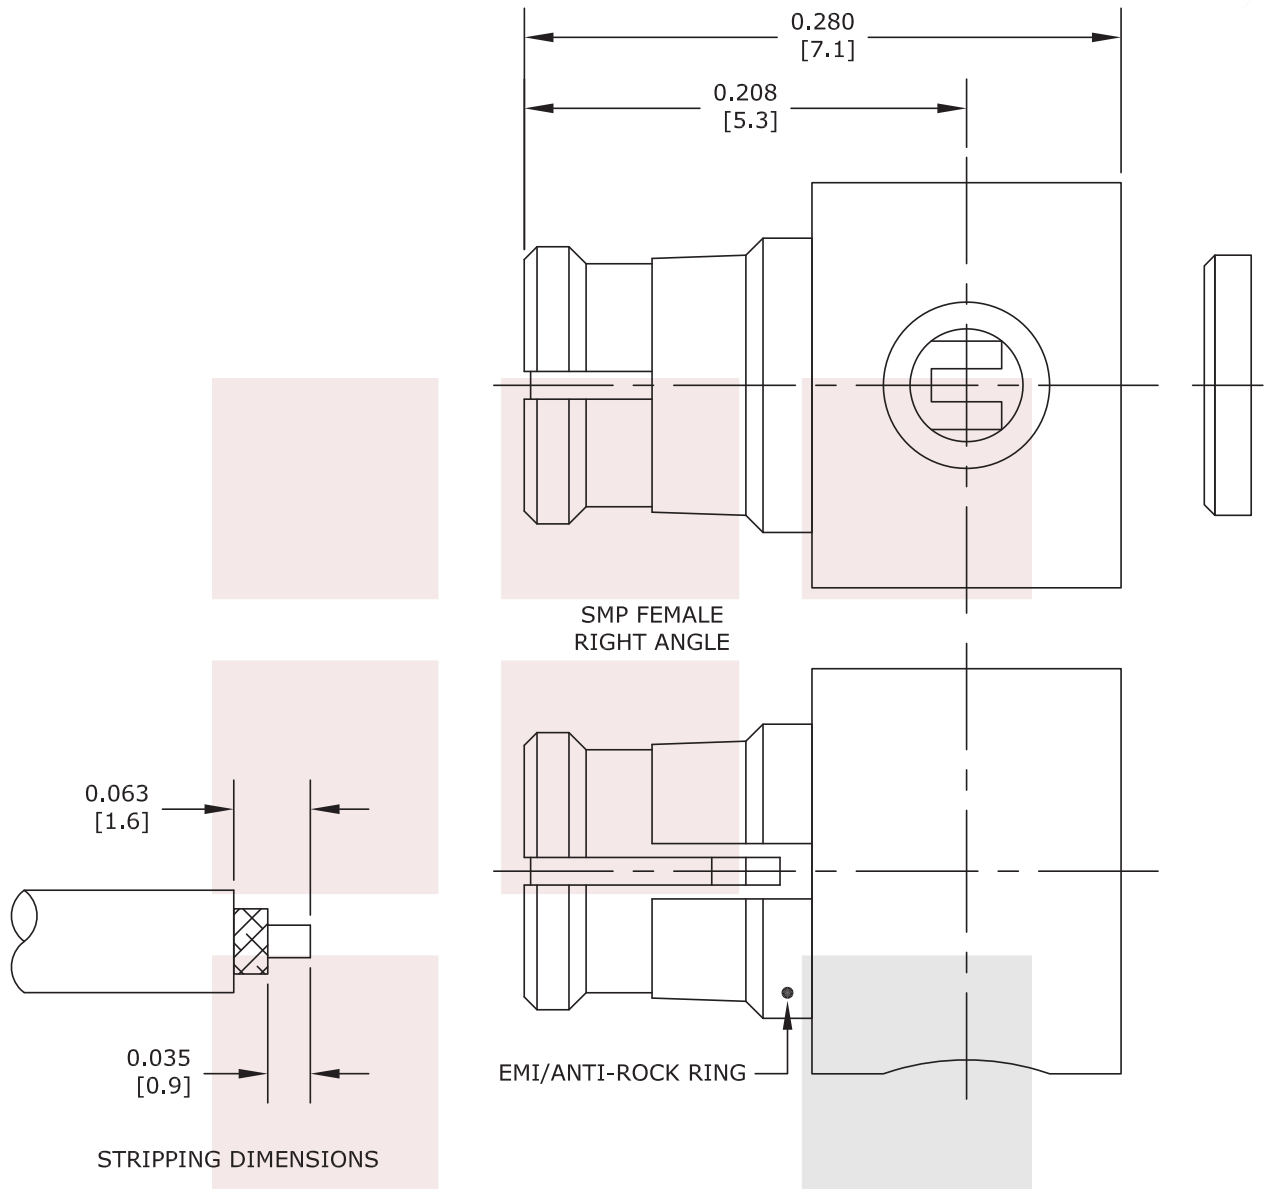

STRIPPING DIMENSIONS
ASSEMBLY PROCEDURES

1. STRIP CABLE AS SHOWN. DO NOT NICK CENTER CONDUCTOR.
2. SOLDER CONTACT TO CENTER CONDUCTOR.
3. INSERT CABLE INTO BODY UNTIL IT BOTTOMS OUT. SOLDER OUTER CONDUCTOR TO BODY.

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM		NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].			
TITLE RA SMP Female Connector Solder Attachment For .047 SR Cable Up To 8 GHz		DWG NO SC5183	CAGE CODE 3FKR5		
CAD FILE	082014	SHEET	SCALE	N/A	SIZE A 2233