

Key Features:


- Frequency range: 800~2500MHz, 30-250MHz bandwidth
- Drop-in configuration
- Small size, low cost
- Power handling up to +50 Watts
- Operating temperature -30~+75°C
- Customer specify center frequency and bandwidth



Electrical Specifications

Part No.	Freq Range MHz	Insertion Loss, dB	Reverse Isolation, dB	VSWR	Forward Power, Watts	Temp. Range, °C
F1569-0088-18	805-960	0.7 Max	≥ 18	≤ 1.3	≥ 20	-20 ~ +75
F1569-0089-15	860-960	0.6 Max	≥ 18	≤ 1.3	≥ 50	-30 ~ +60
F1569-0091-03	900~930	0.5 Max	≥ 22	≤ 1.2	≥ 50	-30 ~ +60
F1569-0094-04	920~960	0.5 Max	≥ 22	≤ 1.2	≥ 50	-30 ~ +60
F1569-0109-24	966-1220	0.5 Max	≥ 20	≤ 1.2	≥ 50	-30 ~ +60
F1569-0190-02	1885-1915	0.4 Max	≥ 23	≤ 1.2	≥ 50	-30 ~ +60
F1569-0180-06	1750-1850	0.5 Max	≥ 20	≤ 1.2	≥ 50	-30 ~ +60

Mechanical Structure:

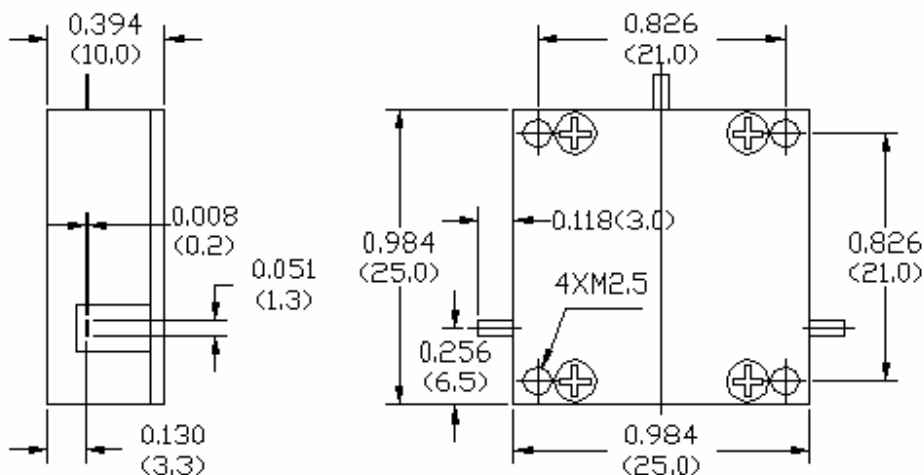

Note: All units in inches (mm).

Ordering Information:

