



RF-LAMBDA

The power beyond expectations

RFDC7M3G30N

WIDE BAND 100W N TYPE DIRECTIONAL COUPLER 0.7GHZ-3.0GHZ



- Wide band performance 0.7GHz-3.0GHz
- power operation up to 100W CW
- Compact size and low loss.
- Low passive inter-modulation product.
- Customized unit available.
- Applicable for base station, repeaters of CMDA cellular network

WIDE BAND 100W SERIES DIRECTIONAL COUPLER 0.7GHZ-3.0GHZ

Electrical Specifications			
Frequency Range:	0.7-3.0GHz	Power	100W CW
Amplitude Balance	n/a	Insertion Loss / VSWR	0.4dB 1.3:1
Directivity	20dB	Coupling	30dB
Environmental Specifications			
Operational Temp.	-55°C to 85°C base plate	Storage Temp.	-55°C to 100°C base plate
Altitude	45,000 ft		
Mechanical Specifications			
Humidity	95% relative humidity, 65°C 96Hour	Mechanical shock	30G, 11mSec half sin wave, 3 axis both directions
Vibration:	14.2g RMS (15-2000Hz) functional	Connectors:	N-Female Brass, Nickel Plate
	16.2g RMS (15-2000Hz) endurance, 1 hour/axis		Beryllium Copper, Gold Plate PIN





RF-LAMBDA

The power beyond expectations

RFDC7M3G30N

DRAWING:

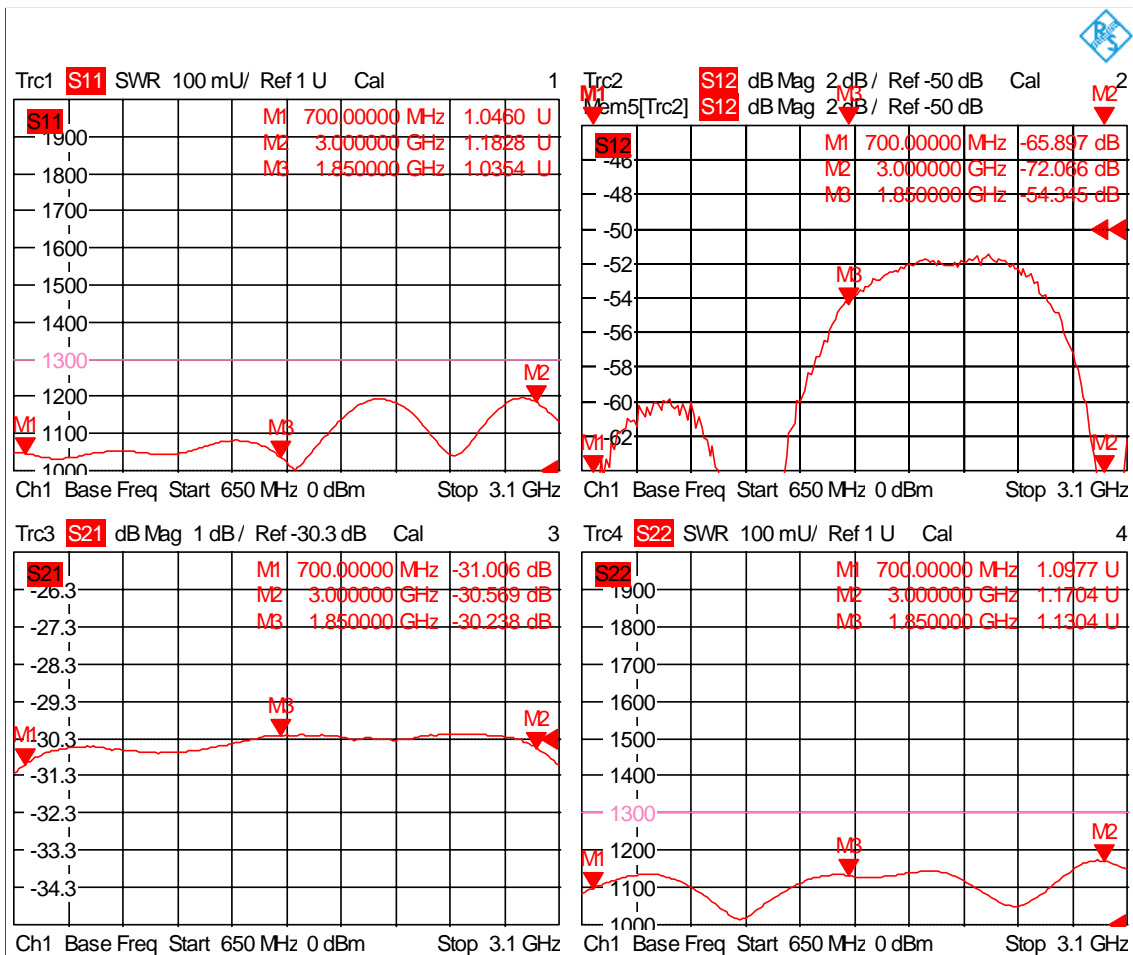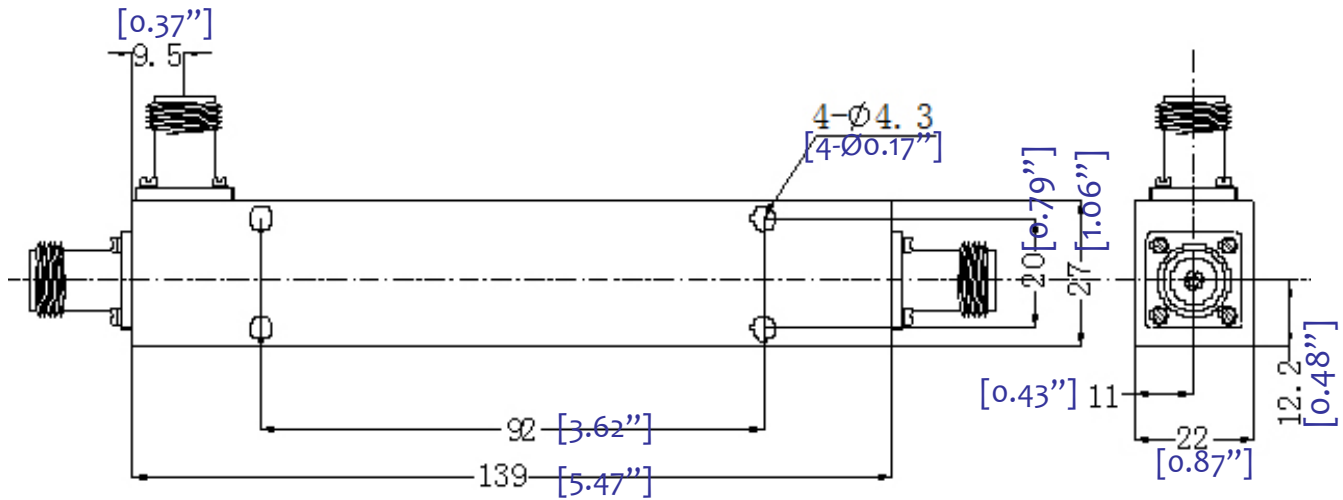

7/24/2014, 4:14 PM


WIDE BAND 100W SERIES DIRECTIONAL COUPLER 0.7GHZ-3.0GHZ



RF-LAMBDA

The power beyond expectations

RFDC7M3G30N

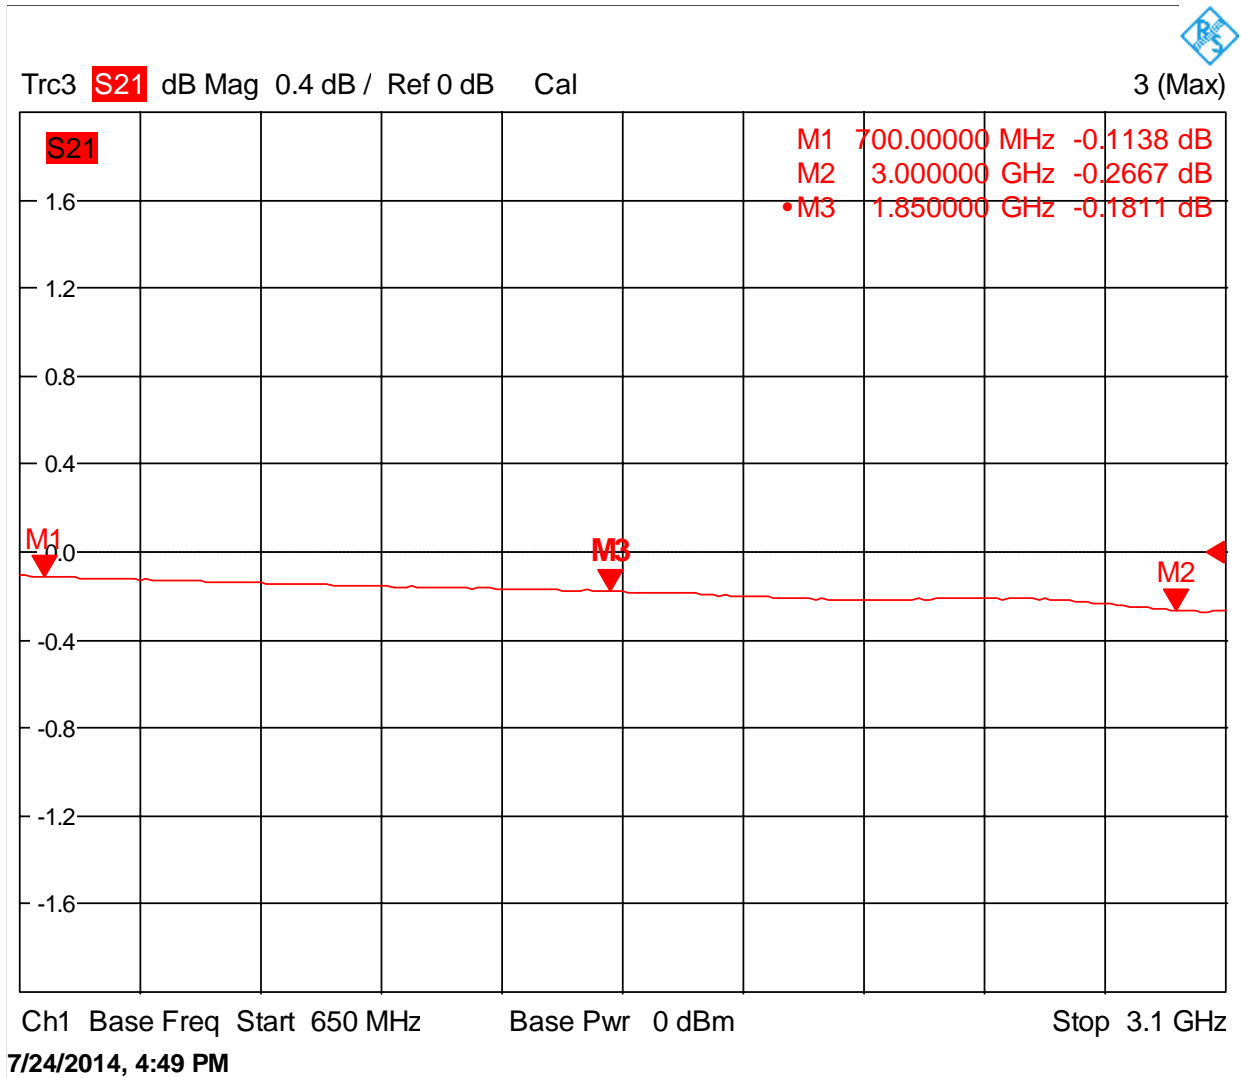

WIDE BAND 100W SERIES DIRECTIONAL COUPLER 0.7GHZ-3.0GHZ