


VOLTAGE CONTROLLED OSCILLATOR 7321 SERIES

TECHNICAL FEATURE

FEATURES

- Broadband, voltage tuning
- Low post-tuning drift (PTD)
- Low FM noise
- Wideband FM Modulation
- Output buffer amplifier and filter
- Internal voltage regulation
- Hermetically sealed

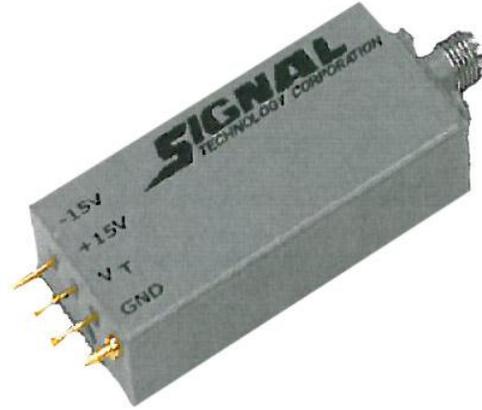

Frequency Range (Note 1)	6.0 to 11.5	GHz
Tuning Bandwidth	45	%, max.
Power Output	+16	dBm, nom.
Post Tuning Drift (1 μ S to 10 S)	\pm 3	MHz, max.
Harmonics	-25	dBc, max.
Phase Noise (SSB) @ 100 kHz offset	-85	dBc/Hz, typ.
Bias Pushing	200	kHz/V, max.
Load Pulling (2.0:1 VSWR)	\pm 5	MHz max.
Tuning Voltage Range (Note 2)	-10 +10	V min. V max.
DC Power		
+15V	250	mA typ.
-15V	100	mA typ.
Modulation Bandwidth	DC to 20	MHz
Temperature Range	-54 to +85	$^{\circ}$ C
RF Connectors	SMA Female	
DC and Tuning	Solder Pin	
Dimensions	1.00 x 1.90 x 0.43	Inches

Note 1: The bandwidth of a VCO within the Frequency Range is limited to the maximum percentage Tuning Bandwidth indicated for each frequency range.

Note 2: Most VCOs will tune the required Frequency Range between -6 V and +8 V. Applying a Tuning Voltage 1 V more negative than the most negative value identified with the delivery of each VCO may cause permanent damage to the VCO. Applying a Tuning Voltage more negative than -1V prior to the application of the negative supply voltage may cause permanent damage to the VCO.

Crane Aerospace & Electronics

Microwave Solutions – Signal Technology
340 North Roosevelt Avenue, Chandler, AZ 85226
+1.480.961.6269 • mw@crane-eq.com
www.craneae.com/mw

