



10 dB Fixed Attenuator, TNC Male To TNC Female  
Directional Aluminum Heatsink Black Anodized  
Body Rated To 100 Watts Up To 1.5 GHz

TECHNICAL DATA SHEET

PE7056-10

**10 dB Fixed Attenuator, TNC Male To TNC Female Directional Aluminum Heatsink Black Anodized Body  
Rated To 100 Watts Up To 1.5 GHz**

**Configuration**

Design	Fixed, Directional Attenuator
Connector 1	TNC Male
Connector 2	TNC Female
Body Material and Plating	Aluminum Heatsink, Black Anodized

**Electrical Specifications**

Frequency Range, GHz	DC to 1.5
Impedance, Ohms	50
Attenuation Value, dB	10
Maximum Input Power, Watts	100
Maximum VSWR	1.15:1

**Frequency 1**

Range, GHz	DC to 1.5
Attenuation Accuracy, dB	± 0.5

**Mechanical Specifications**

**Temperature**

Operating Range, deg C	-65 to +125
------------------------	-------------

**Size**

Length, in [mm]	6.525 [165.74]
Width, in [mm]	3.46 [87.88]
Height, in [mm]	3.46 [87.88]
Weight, lbs [g]	1.09 [494.42]

**Connector 1**

Type	TNC Male
------	----------

**Connector 2**

Type	TNC Female
------	------------

**Compliance Certifications** (visit [www.Pasternack.com](http://www.Pasternack.com) for current document)

RoHS Compliant	Yes
----------------	-----

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [10 dB Fixed Attenuator, TNC Male To TNC Female Directional Aluminum Heatsink Black Anodized Body Rated To 100 Watts Up To 1.5 GHz PE7056-10](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



10 dB Fixed Attenuator, TNC Male To TNC Female  
Directional Aluminum Heatsink Black Anodized  
Body Rated To 100 Watts Up To 1.5 GHz

TECHNICAL DATA SHEET

PE7056-10

**Plotted and Other Data**

Notes:

Values at 25 °C, sea level

10 dB Fixed Attenuator, TNC Male To TNC Female Directional Aluminum Heatsink Black Anodized Body Rated To 100 Watts Up To 1.5 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [10 dB Fixed Attenuator, TNC Male To TNC Female Directional Aluminum Heatsink Black Anodized Body Rated To 100 Watts Up To 1.5 GHz PE7056-10](http://www.pasternack.com/10db-fixed-tnc-male-tnc-female-100-watts-attenuator-pe7056-10-p.aspx)

URL: <http://www.pasternack.com/10db-fixed-tnc-male-tnc-female-100-watts-attenuator-pe7056-10-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

10 dB Fixed Attenuator, TNC Male To TNC Female Directional Aluminum  
Heatsink Black Anodized Body Rated To 100 Watts Up To 1.5 GHz

P/N	ATTEN.	FIGURE
PE7056-6	6 dB	1
PE7056-10	10 dB	1
PE7056-20	20 dB	1
PE7056-30	30 dB	1
PE7056-40	40 dB	1

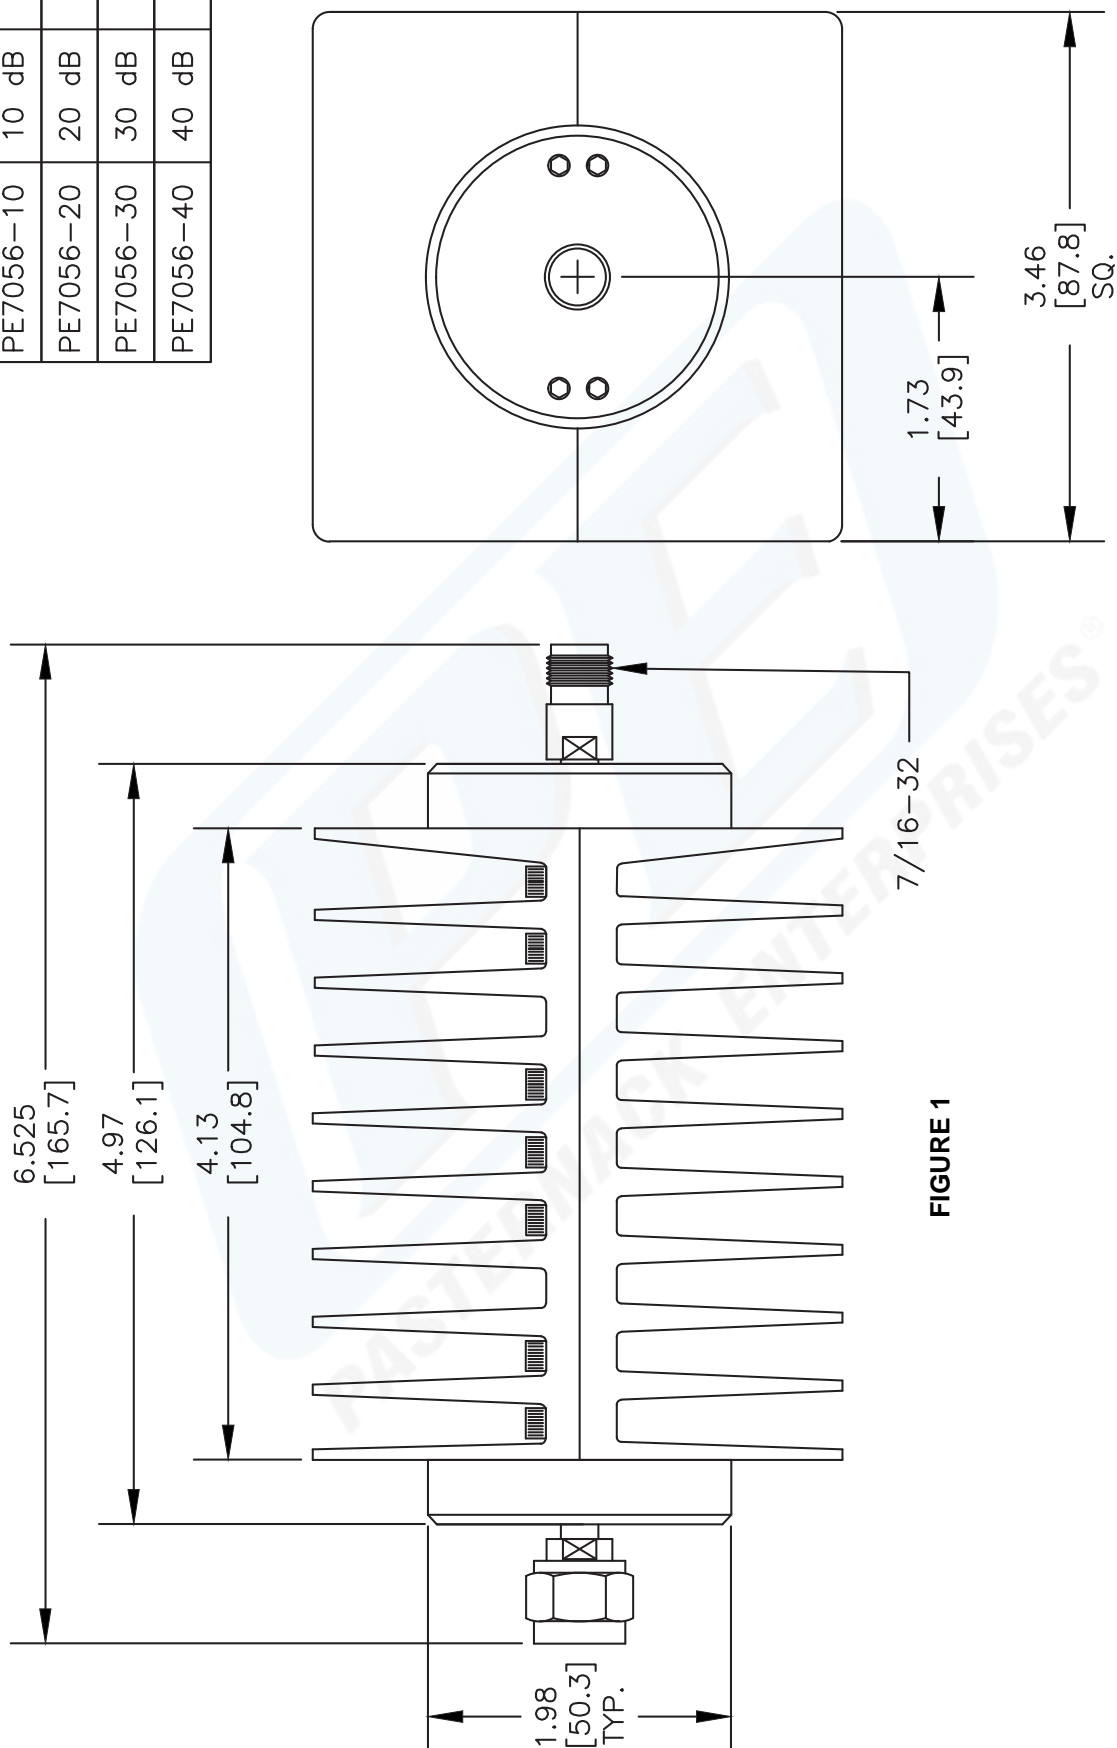

**DWG TITLE**

PE7056

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES [mm].

**FSCM NO. 53919**

**SIZE A**

**SCALE N/A**

**CAD FILE**      **080702**

XXXX


**PASTERNAK®**

**Pasternack Enterprises, Inc.**  
P.O. Box 16759 | Irvine | CA | 92623  
**Phone:** (949) 261-1920 | **Fax:** (949) 261-7451  
**Website:** [www.pasternack.com](http://www.pasternack.com) | **E-Mail:** [sales@pasternack.com](mailto:sales@pasternack.com)