

OUTPUT

Frequency

300 MHz

Level

+13 dBm ±2 dB into 50 ohms

STABILITY

Aging

1 x 10⁻⁶ first year
after 30 days operating, typical
5 x 10⁻⁷ second year, typical
3 x 10⁻⁷ per year thereafter, typical

Phase Noise L(f), typical

100 Hz -119 dBc/Hz
1 KHz -147 dBc/Hz
10 KHz -163 dBc/Hz
100 KHz -164 dBc/Hz

Temperature Stability

±5 x 10⁻⁷, 0° to +50°C (Ref +25°C)

Harmonics

≤ -25 dBc

Sub-Harmonics

≤ -70 dBc

Spurious

≤ -80 dBc, excluding power supply line related spurs

MECHANICAL

Dimensions

2.25 x 4 x 1"

Connectors

SMA(f) and solder pins

Packaging

Nickel-plated machined aluminum housing – J1

Mounting

Threaded inserts on base,
#2-56, 6 places

POWER REQUIREMENTS

Warm-Up Power

≤ 8 Watts for 5 minutes

Total Power

≤ 5 Watts at +25°C

Supply Voltage

+15 VDC ±5%

ADJUSTMENT

Mechanical Tuning

±4 x 10⁻⁶

Electrical Tuning

±5 x 10⁻⁷, ±5 VDC

Negative slope

CRYSTAL

Type

100 MHz SC-cut (x3)

OTHER

Label


Use conventional label with the following information:
501-25381 (Current Rev.)
300 MHz MXO-FR
+15 VDC
Serial # - Date Code
(Mark connectors with function)

Test Data

Output Level
Phase Noise
Temperature Stability
Harmonics, Subs, Spurious
Power – Warm-up and Total
Tuning – MT and ET

REV	DATE	REVISION RECORD	DWN	AUTH
-	01-25-12	Initial Release	PAC	

J1 MXO Connections	
Connector	Function
1	Supply Voltage
2	Ground, Case
3	Electrical Tuning
4	RF Output

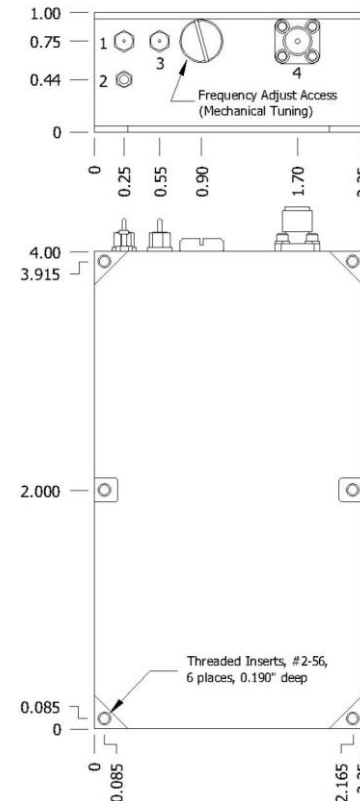

Wenzel Associates, Inc.

Austin, Texas

Title: **300 MHz Multiplied Crystal Oscillator (MXO-FR)**

P/N: 501-25381	Rev: -	Date: 01-25-12	Drawn:	Ref:
--------------------------	------------------	--------------------------	--------	------

Tolerances: (except as noted) Dimensions are in inches	0.XX Dec: ±0.030"	0.XXX Dec: ±0.010"	FSCM: 62821	Page 1 of 1
--	-----------------------------	------------------------------	-----------------------	-------------