

300 MHz < Fo < 399.99 MHz

Band Pass

Slopes 20 MHz

Bandwidth 4 MHz


WBCA5-___

Attenuation 90 dB


Specifications

Passband:	___ (Fo) ± 2 MHz = ___ to ___ MHz
Passband Insertion Loss:	0.6 dB max. at Fo (0.65 dB max. at corners)
Passband Return Loss:	20 dB min. (VSWR 1.22:1 max.)
Stopband:	DC to ___ MHz and ___ to 800 MHz
Stopband Attenuation:	90 dB min.
Operating Temperature:	15 °C to 45 °C
Power Handling:	max. 1600 W CW into a 2:1 VSWR (<i>Please see our warranty in this regard</i>)
Dimensions (L x W x H):	max. 637 x 140 x 275 mm (plus connectors and flanges)
Approx. Weight:	16.5 kg
Mounting Provision:	20 mm flanges on both ends with 5.5 mm holes
Connector 1:	- Please choose -
Connector 2:	- Please choose -

Typical Performance

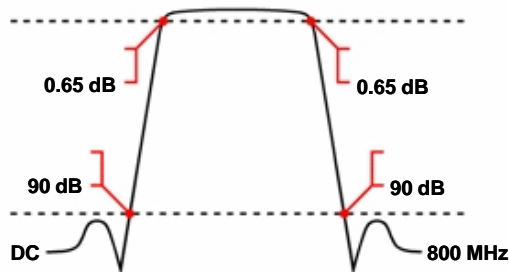

5 Section Cavity Design

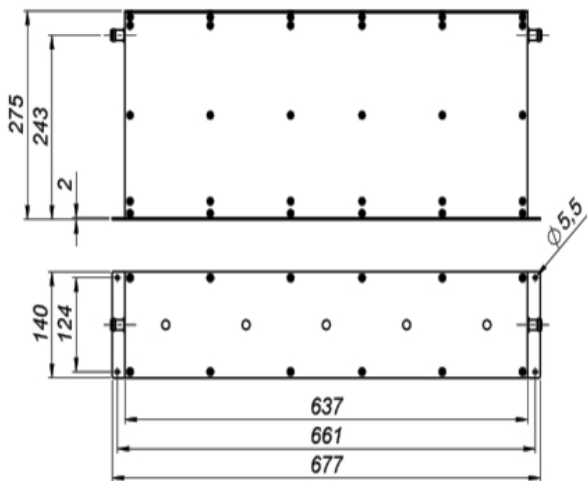

Connector Options

- N Female
- N Male
- 7/16 Female

Euro Prices

(USD Prices will be quoted for US-based customers only)

1 - 4 pcs:	€ 2310
5 - 9 pcs:	€ 2195
10 - 24 pcs:	€ 2085

Delivery Terms

FCA Andechs (free carrier) according to **Incoterms 2010**
 In Deutschland liefern wir frachtfrei gemäß CPT **Incoterms 2010** (unversichert).
 Regarding payment terms and warranty see [Terms and Conditions](#).
Delivery time: normally 3 to 4 weeks - depending on quantity ordered and on our work load.

Customer is responsible for observing all applicable export laws in regard to filter application and location of end user



Wainwright Instruments GmbH
 www.wainwright-filters.com

Tel: +49 8152 918230
 Fax: +49 8152 918255
 info@wainwright-filters.com