

# SMA-M CONN. R ANGLE LMR240 CRIMP / SOLDER

SC6081

## SPECIFICATIONS

### ELECTRICAL:



FREQUENCY: 0-12 GHZ  
VSWR 1.3:1 MAX  
IMPEDANCE: 50 OHMS  
OP. TEMP RANGE: -55C- +155C

### MECHANICAL:

MATERIAL BODY: NICKLE PLATED BRASS  
CENTER CONTACT: BRASS  
CONTACT PLATING: GOLD MIL-G-45204  
INSULATOR: TEFLON  
INTERFACE: MIL-STD-348A

### ROHS COMPLIANT



CABLES: LMR240 & LMR240 ULTRAFLEX,  
RG-8/X, BELDEN9258

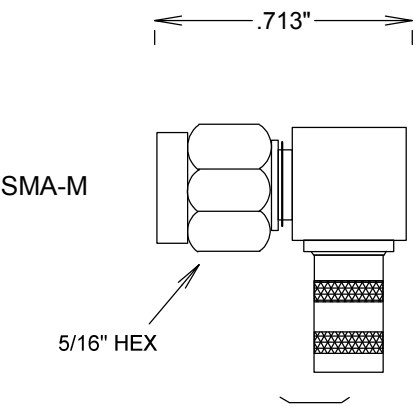

SLEEVE



CAP



STRIPPING DIMENSIONS

					<b>FAIRVIEW MICROWAVE INC.</b>	
					ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM	
					TITLE	
					SMA-M CONN. R ANGLE LMR240 CRIMP / SOLDER	
SIZE		CAGE CODE	DWG NO		REV	
A		3FKR5	SC6081		--	
SCALE			SHEET			