

TYPE N INNER DC BLOCK .01-6GHZ

SD3076

SPECIFICATIONS

ELECTRICAL:

FREQUENCY: 10MHZ-6 GHZ

IMPEDANCE: 50 OHMS

VSWR : 1.35 MAX

INSERTION LOSS: 0.5DB MAX

VOLTAGE RATING: 50 VOLTS

IMPEDANCE: 50 OHMS

MECHANICAL:

MATERIAL BODY: TRIMETAL PLATED BRASS

MATERIAL RING & CONTACTS: BeCu

CENTER CONTACT: Au PLATED MIL-G-45204

INSULATOR: TEFLON


INTERFACE: MIL-STD-348A

ENVIRONMENTAL:


TEMP: -55 C TO +120°C

ROHS COMPLIANT

MEASUREMENTS BELOW ARE TYPICAL

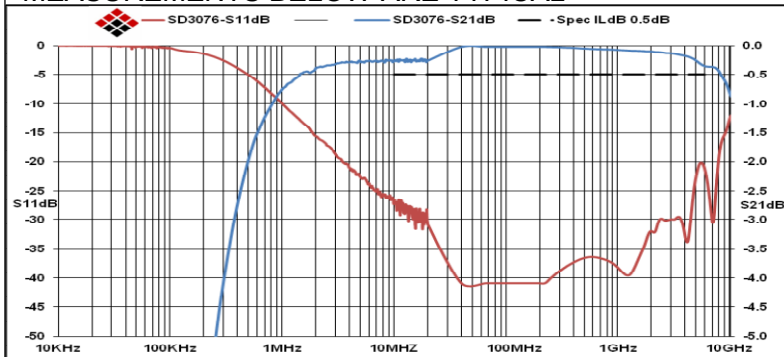

ALL DIMENSIONS IN inches(MM) Typical

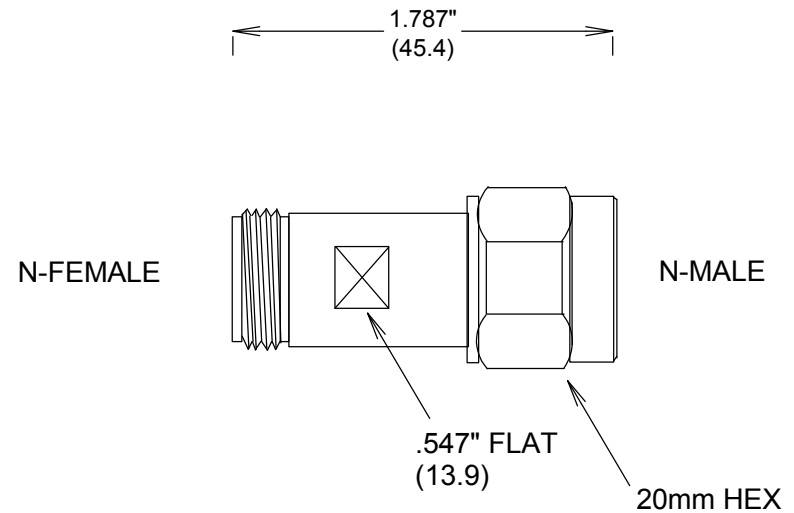

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

TYPE N INNER DC BLOCK .01-6GHZ

SIZE	CAGE CODE	DWG NO	REV
A	3FKR5	SD3076	A
SCALE	SHEET		