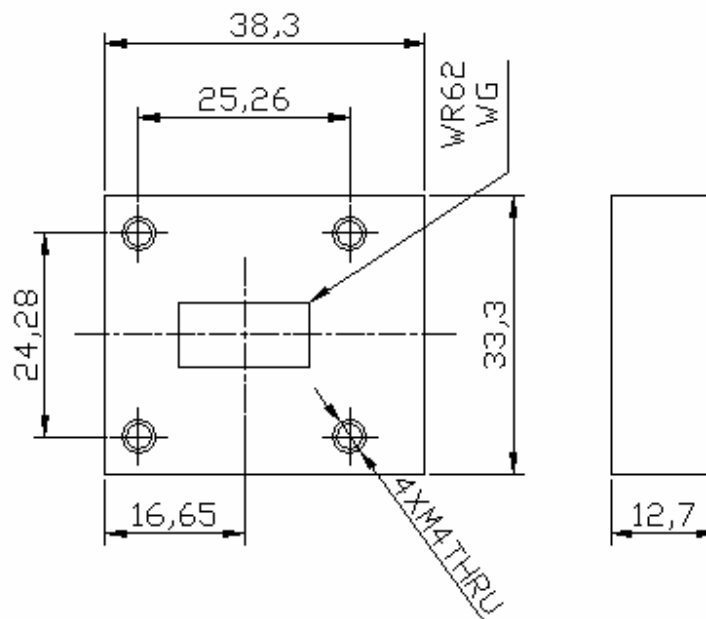


Key Features:

- Frequency range: 14.0~18.0GHz, bandwidth up to 1200MHz
- WR-62 waveguide, compact size
- Power handling >10Watts CW
- Customer specify center frequency and bandwidth

Electrical Specifications

Part No.	Freq Range GHz	Insertion Loss, dB	Reverse Isolation, dB	VSWR	CW Power, Watts	Temp. Range, °C
F3202-1488-06	14.4~15.35	0.40 Max	≥ 20	≤1.25	≥ 10	-20 ~ +70
F3202-1512-04	14.8~15.45	0.40 Max	≥ 21	≤1.2	≥ 10	-20 ~ +70

Mechanical Structure:

All units in mm

Ordering Information:

F3202-XXXX-XX
 ↓ ↓
 Bandwidth, XX%,
 Frequency XX.XX GHz,