


# Power Divider / Combiner

Model: MPD6-020042A



Microot Microwave co., Ltd.

## 6-Way Power Divider

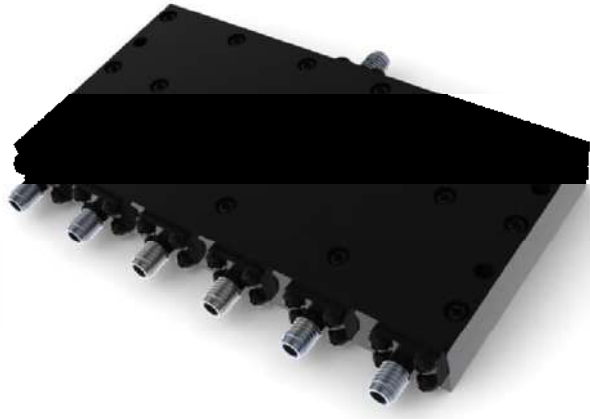

### Elec. Spec. "50Ω"

[Inquiry](#)

Freq. Range (GHz)	2-4.2
Input VSWR Max	1.2
Output VSWR Max	1.25
Insertion Loss (dB) Max	.5
Amp. Bal. (dB) Max	
Pha. Bal. (deg) Max	
Isolation (dB) Min	22
CW Power (W) Max	25
Peak Power (KW) Max	/
Connector	SMA-Female
Operating Temp. (°C)	-40~+70
Storage Temp. (°C)	-55~+85

### Features

- 1.Theoretical Insertion Loss not included in the Insertion Loss Parameter.
2. Multi-Octave bandwidth of working frequency range.
3. Superior phase balance and amplitude balance between any 2 ports.
4. Low VSWR and high Output Isolation.

### Outline Drawing Unit: mm

