

# Surface Mount Bandpass Filter

## SXBP-101+

50Ω 94 to 108 MHz

### The Big Deal

- Flat group delay (10 ns)
- Narrow-band
- Good VSWR (1.2:1 typical)
- Fast roll-off
- Miniature shielded package



CASE STYLE: HF1139

### Product Overview

The SXBP-101+ is a narrow-band bandpass filter fabricated using SMT technology. Covering 101 MHz  $\pm$  7 MHz, these units offer good matching within the passband and high rejection. This unit uses a miniature high Q capacitors and wire welded inductors for high reliability. It has repeatable performance across production lots and consistent performance across temperature.

### Key Features

Feature	Advantages
Sharp shape factor	Sharp shape factor helps in adjacent channel rejection and hence increased selectivity.
Flat group delay (10ns typical)	The model has flat group delay of 10ns which ensures that the signal distortion is very less.
Good VSWR, 1.2:1 typical over pass-band	This provides well matched input and output ports.
Small size, 0.44" x 0.74" x 0.27"	The surface mount package enables SXBP-101+ to be used in compact designs.

 **Mini-Circuits**<sup>®</sup>  
ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine  Provides ACTUAL Data Instantly at [minicircuits.com](http://minicircuits.com)

IF/RF MICROWAVE COMPONENTS

For detailed performance specs  
& shopping online see web site

**Notes:** 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).

# Bandpass Filter

## SXBP-101+

50Ω 94 to 108 MHz



CASE STYLE: HF1139  
PRICE: \$17.95 ea. QTY (1-9)

### Features

- Flat group delay over passband
- Good VSWR, 1.2:1 typical in passband
- High rejection, 40 dB
- Shielded case
- Aqueous washable

### Applications

- Test equipments
- Harmonic rejection
- Transmitters / receivers
- Military

### Electrical Specifications at 25°C


Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit	
Pass Band	Center Frequency	—	—	101	—	MHz	
	Insertion Loss	F1-F2	94-108	—	2.3	3.5	dB
	VSWR	F1-F2	94-108	—	1.2	1.7	:1
Stop Band, Lower	Insertion Loss	DC-F3	DC-80	20	29	—	dB
	VSWR	DC-F3	DC-80	—	31	—	:1
Stop Band, Upper	Insertion Loss	F4-F5	130-3900	20	27	—	dB
	VSWR	F4-F5	130-3900	—	19	—	:1

### Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	0.25W max.

Permanent damage may occur if any of these limits are exceeded.

### Functional Schematic

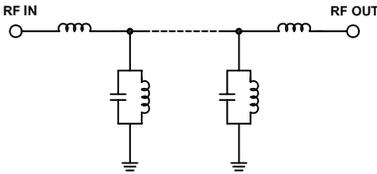

### Typical Frequency Response







### Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)	Frequency (MHz)	Group Delay (nsec)
1.0	87.97	86.86	94.0	48.97
71.0	46.64	48.26	95.0	45.85
80.0	28.90	33.42	96.0	43.59
86.0	13.75	11.61	97.0	42.06
88.5	6.98	4.28	98.0	40.80
90.5	3.51	1.77	99.0	39.77
94.0	2.15	1.26	99.5	39.48
101.0	1.79	1.08	100.0	38.98
108.0	2.05	1.02	100.5	38.82
113.0	4.95	3.01	101.0	38.47
116.0	9.70	6.73	101.5	38.29
120.5	17.09	13.49	102.0	38.18
130.0	28.73	24.14	102.5	37.97
200.0	63.19	69.49	103.0	37.89
400.0	85.27	157.93	103.5	37.85
500.0	76.82	157.93	104.0	37.98
1000.0	69.83	75.53	105.0	38.36
2000.0	63.05	51.10	106.0	38.97
3000.0	40.83	38.61	107.0	40.24
3900.0	44.76	18.70	108.0	41.95

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

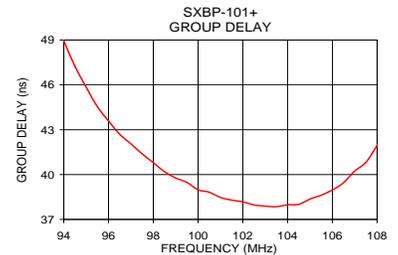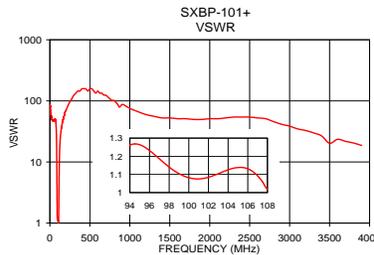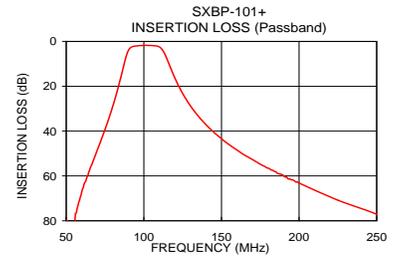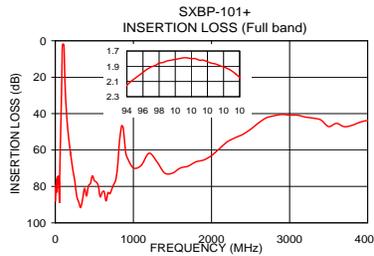

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at [minicircuits.com](http://minicircuits.com)

IFIRF MICROWAVE COMPONENTS


Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).

For detailed performance specs & shopping online see web site

## Pad Connections

INPUT	1
OUTPUT	8
GROUND	2,3,4,5,6,7

## Demo Board MCL P/N: TB-368 Suggested PCB Layout (PL-230)

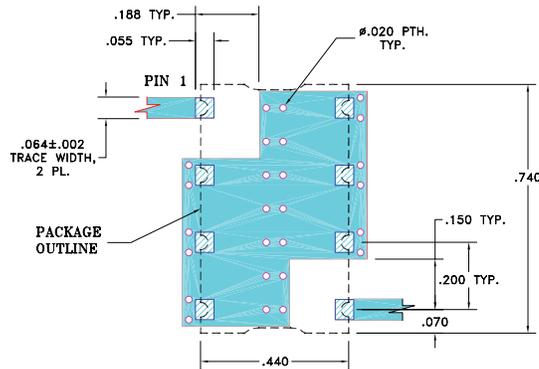


### NOTE:


- TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS: .025" ± .002". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
- BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

## Outline Drawing

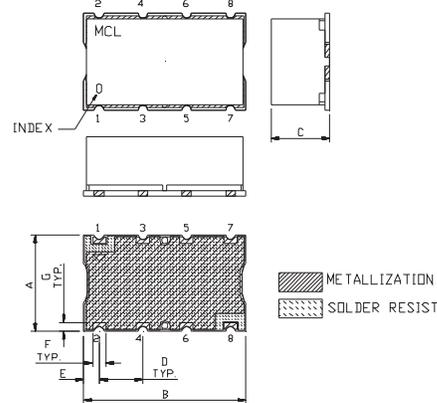

## PCB Land Pattern



## Outline Dimensions (inch / mm)

A	B	C	D	E	F	G
.44	.74	.27	.200	.07	.060	.040
11.18	18.80	6.86	5.08	1.78	1.52	1.02
H	J	K	L	M	wt	
.660	.200	.470	.055	.060	grams	
16.76	5.08	11.94	1.40	1.52	3.0	