

MINISMP MALE FULL DETENTE PCB LOW PROFILE

SC5464


SPECIFICATIONS

ELECTRICAL:

FREQUENCY: 0-50 GHZ
 IMPEDANCE: 50 OHMS
 OP. TEMP RANGE: -55° to +125°C

MECHANICAL:

MATERIAL: BeCu
 INSULATOR: TORLON
 PLATING: Au PER MIL-G-45204
 FORCE TO ENGAGE: 4 LBS MAX
 FORCE TO DISENGAGE: 2.5LBS MIN
 ROHS COMPLIANT

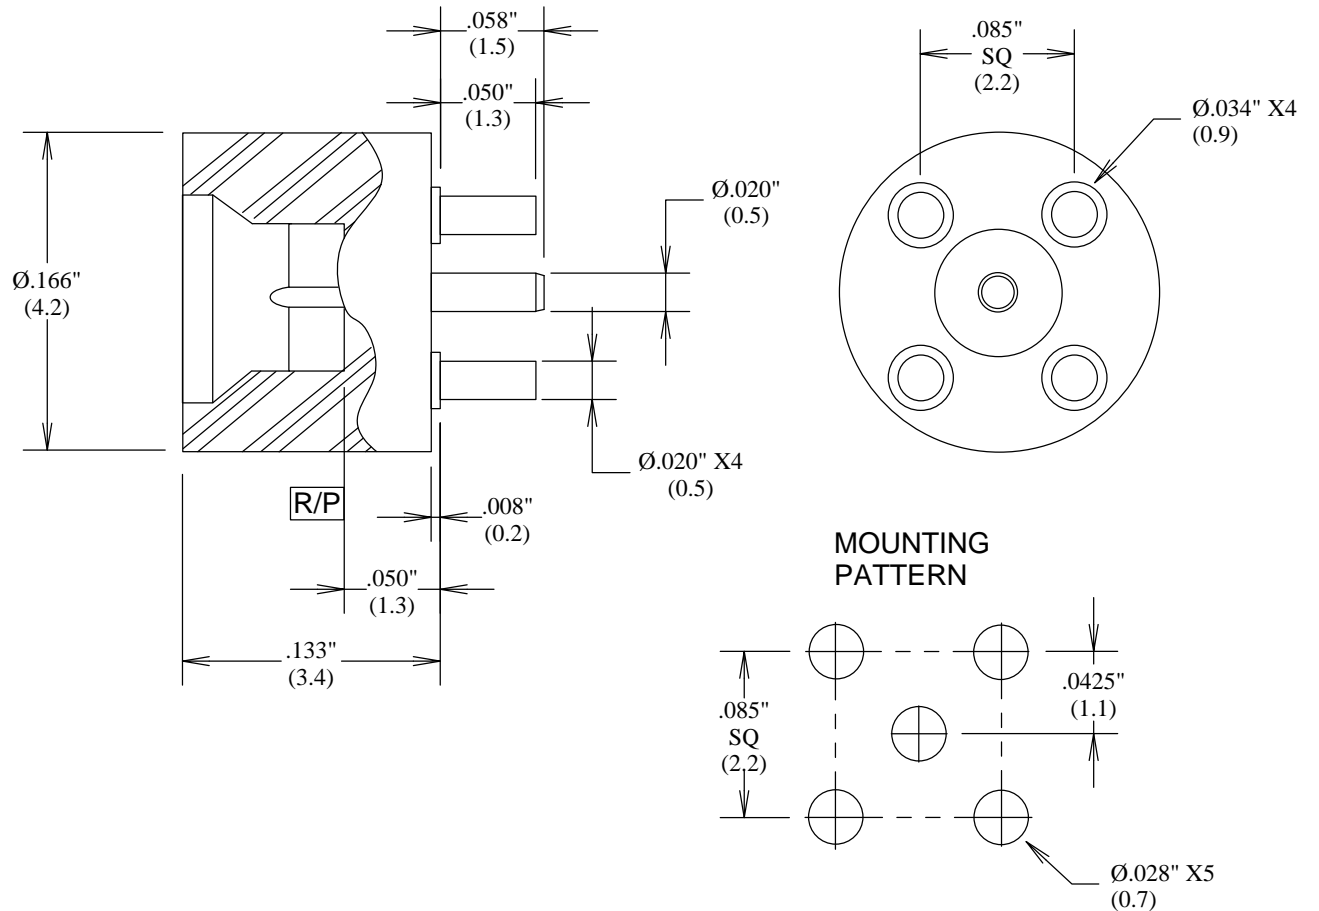

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

**MINISMP MALE FULL DETENTE
PCB LOW PROFILE**

SIZE CAGE CODE DWG NO

A

3FKR5

SC5464

REV

A

SCALE

SHEET