



# RF-LAMBDA

The power beyond expectations

RFLT8W2G18G






## Wide Band Power Divider

- Very small package
- Excellent phase and amplitude balance
- Bi-Directional as divider and combiner \*
- Low Insertion loss and high isolation
- Standard: MIL E-5400, MIL E-16400
- High power handling capability
- \* 2W maximum input when work as combiner.

### Electrical Specifications:

Center Frequency Range:	2.0GHz-18.0GH
Insertion Loss:	4dB
Amplitude Unbalance:	0.8dB
Phase unbalance:	10 degree
Isolation:	15dB
Input VSWR:	1.8:1
Output VSWR:	1.5:1
Temp. Range:	-40 °C ~ +85° C
Forward Power Handling:	20W (CW)
Reverse Power Handling:	2W (CW)
Connector:	SMA-F
Finishing:	Gray Paint Epc

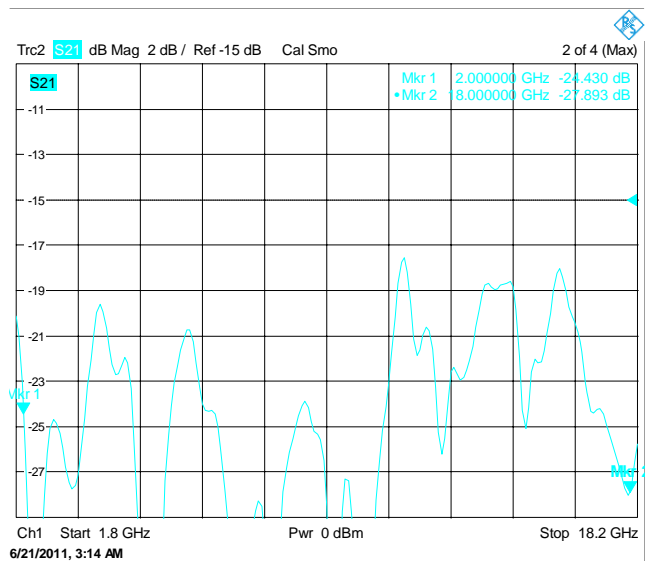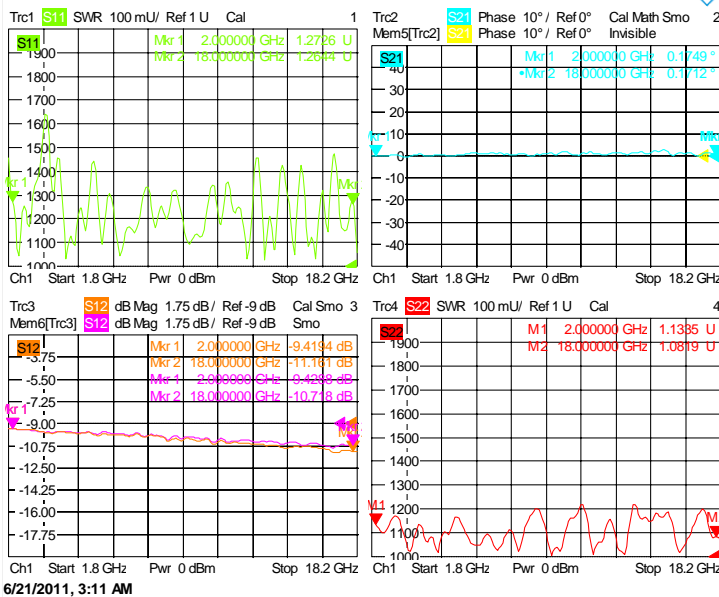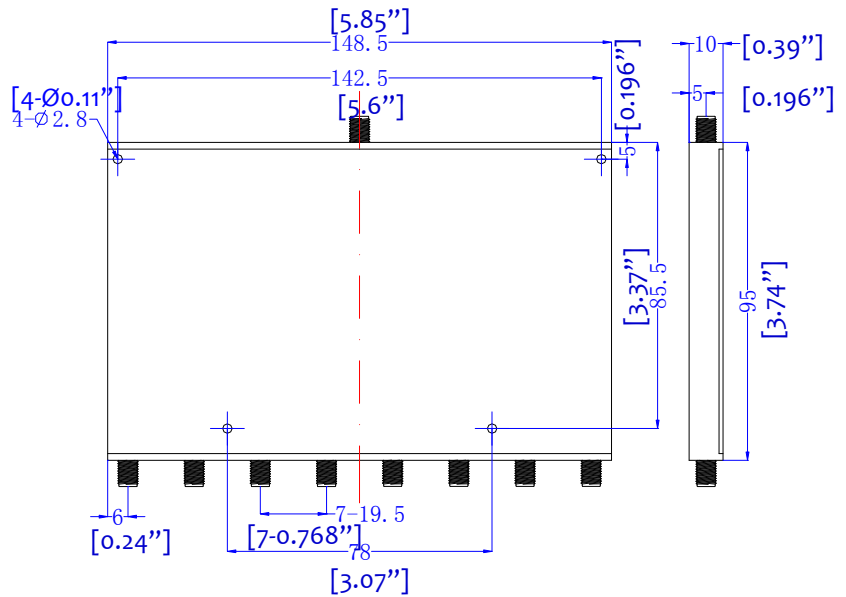

2.0GHz-18.0GHz 8-Way Power Divider