



10 dB Fixed Attenuator, TNC Male To TNC Female
Directional Aluminum Heatsink Black Anodized
Body Rated To 50 Watts Up To 18 GHz

TECHNICAL DATA SHEET

PE7055-10

**10 dB Fixed Attenuator, TNC Male To TNC Female Directional Aluminum Heatsink Black Anodized Body
Rated To 50 Watts Up To 18 GHz**

Configuration

Design	Fixed, Directional Attenuator
Connector 1	TNC Male
Connector 2	TNC Female
Body Material and Plating	Aluminum Heatsink, Black Anodized

Electrical Specifications

Frequency Range, GHz	DC to 18
Impedance, Ohms	50
Attenuation Value, dB	10
Maximum Input Power, Watts	50
Maximum VSWR	1.45:1

Frequency 1

Range, GHz	DC to 18
VSWR	1.45:1
Attenuation Accuracy, dB	± 1

Mechanical Specifications

Size

Length, in [mm]	4.65 [118.11]
Width, in [mm]	3.5 [88.9]
Height, in [mm]	2.65 [67.31]

Connector 1

Type	TNC Male
Connector Specification	MIL-STD-348
Hex Size, in.	5/8
Torque, in-lbs [Nm]	14 [1.58]

Connector 2

Type	TNC Female
Connector Specification	MIL-STD-348

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant	Yes
----------------	-----

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [10 dB Fixed Attenuator, TNC Male To TNC Female Directional Aluminum Heatsink Black Anodized Body Rated To 50 Watts Up To 18 GHz PE7055-10](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



10 dB Fixed Attenuator, TNC Male To TNC Female
Directional Aluminum Heatsink Black Anodized
Body Rated To 50 Watts Up To 18 GHz

TECHNICAL DATA SHEET

PE7055-10

Plotted and Other Data

Notes:

Values at 25 °C, sea level

10 dB Fixed Attenuator, TNC Male To TNC Female Directional Aluminum Heatsink Black Anodized Body Rated To 50 Watts Up To 18 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [10 dB Fixed Attenuator, TNC Male To TNC Female Directional Aluminum Heatsink Black Anodized Body Rated To 50 Watts Up To 18 GHz PE7055-10](http://www.pasternack.com/10db-fixed-tnc-male-tnc-female-50-watts-attenuator-pe7055-10-p.aspx)


URL: <http://www.pasternack.com/10db-fixed-tnc-male-tnc-female-50-watts-attenuator-pe7055-10-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

PE7055-10 CAD Drawing

10 dB Fixed Attenuator, TNC Male To TNC Female Directional Aluminum
Heatsink Black Anodized Body Rated To 50 Watts Up To 18 GHz

P/N	ATTEN.	FIGURE
PE7055-6	6 dB	1
PE7055-10	10 dB	1
PE7055-20	20 dB	1
PE7055-30	30 dB	1
PE7055-40	40 dB	1

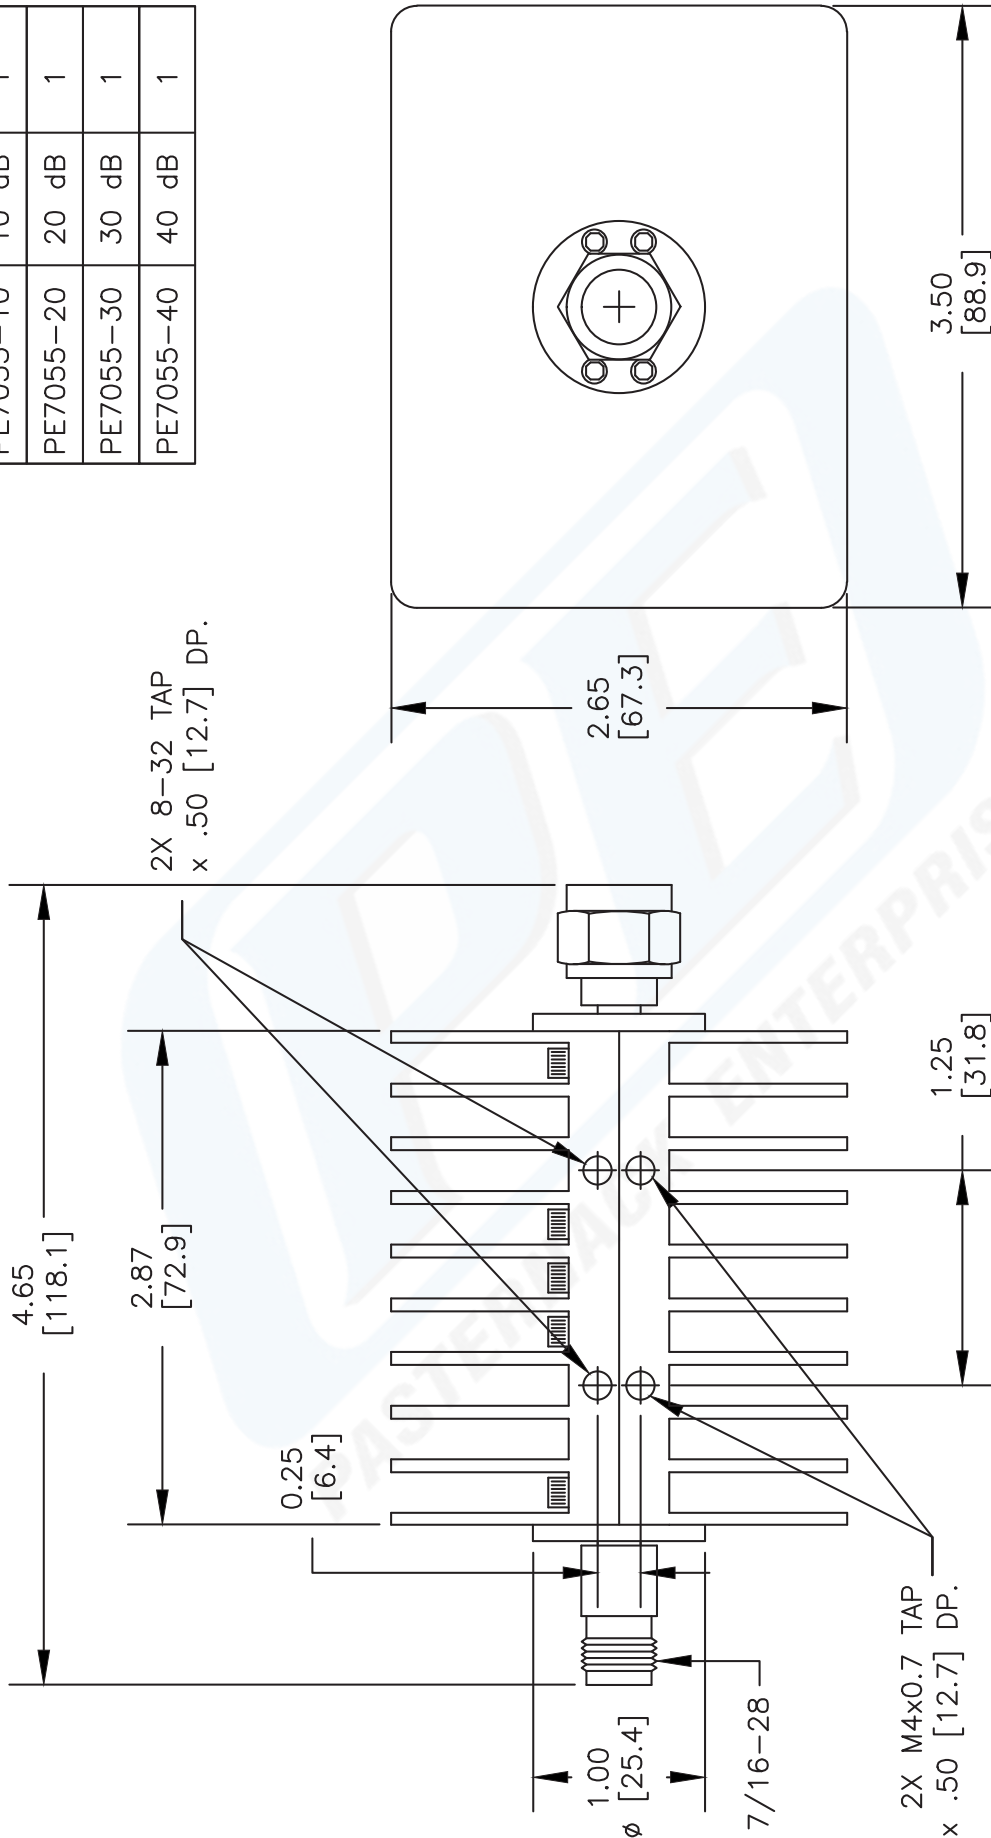

TNC MALE

FIGURE 1

TNC FEMALE

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE

PE7055

FSCM NO. 53919

XXXX

SIZE A

SCALE N/A

CAD FILE 030613

PASTERNACK®
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623

Phone: (949) 261-1920 | Fax: (949) 261-7451

Website: www.pasternack.com | E-Mail: sales@pasternack.com