

Coaxial Amplifier

ZJL-6G+

50Ω Low Power 20 to 6000 MHz



Features

- ultra wideband, 20 to 6000 MHz
- compact rugged case, 1.07"x 0.61" (including mounting bracket)
- protected by US Patent, 6,943,629

Applications

- communications systems
- radar
- instrumentation
- laboratory use

CASE STYLE: BW459

Connectors	Model	Price	Qty.
SMA	ZJL-6G+	\$114.95 ea.	(1-9)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Amplifier Electrical Specifications

MODEL NO.	FREQUENCY (MHz)		GAIN (dB)			MAXIMUM POWER (dBm)			DYNAMIC RANGE		VSWR (:1) Typ.		DC POWER	
	f_L	f_U	Typ.	Min.	Flatness ¹ Typ.	Output (1 dB Compr.)		Input (no damage)	NF (dB) Typ.	IP3 (dBm) Typ.	In	Out	Volt (V) Nom.	Current (mA) Max.
ZJL-6G+	20	6000	13	10	±1.6	+9	+10	+15	4.5	+24	1.5	1.4	12	50

1. Flatness specified to 0.75 fU, dynamic range at 2 GHz.

Open load is not recommended, potentially can cause damage. With no load derate max input power by 20 dB

L= low range (f_L to $f_U/2$)

U= upper range ($f_U/2$ to f_U)


Maximum Ratings

Operating Temperature -40°C to 75°C

Storage Temperature -55°C to 100°C

DC Voltage +13V Max.

Outline Drawing

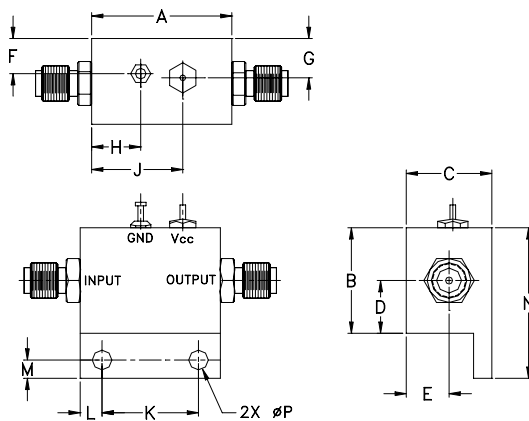

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	wt
1.00	.75	.61	.38	.29	.25	.26	.35	.65	.688	.156	.13	1.07	.140	grams
25.40	19.05	15.49	9.65	7.37	6.35	6.60	8.89	16.51	17.48	3.96	3.30	27.18	3.56	25



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

FREQUENCY (MHz)	GAIN (dB)			DIRECTIVITY (dB)			VSWR (:1)		NOISE FIGURE (dB)	POUT at 1 dB COMPR. (dBm)
	9V	12V	13V	9V	12V	13V	IN	OUT		
20.00	14.03	14.80	14.90	4.98	4.94	4.94	1.40	1.72	4.36	13.17
470.00	14.06	14.84	14.94	4.90	4.82	4.83	1.37	1.64	4.20	13.31
920.00	13.68	14.39	14.48	5.42	5.37	5.39	1.33	1.56	4.30	13.35
1370.00	13.71	14.38	14.46	5.08	4.99	4.98	1.29	1.47	4.13	13.34
1820.00	13.57	14.28	14.37	5.10	4.83	4.78	1.21	1.36	4.16	13.26
2120.00	13.42	14.10	14.19	5.19	4.96	4.89	1.17	1.29	4.21	13.21
2570.00	12.98	13.62	13.69	5.84	5.55	5.48	1.16	1.24	4.35	13.20
3020.00	12.65	13.16	13.21	6.20	6.09	6.05	1.19	1.27	4.33	13.24
3470.00	12.32	12.81	12.86	6.55	6.36	6.33	1.23	1.34	4.47	13.52
3920.00	11.78	12.19	12.21	7.55	7.40	7.40	1.26	1.40	4.41	13.51
4220.00	11.74	12.15	12.18	7.62	7.49	7.46	1.26	1.42	4.45	13.61
4820.00	11.50	11.82	11.81	8.38	8.29	8.30	1.25	1.47	4.80	13.21
5120.00	11.58	11.88	11.86	9.05	8.98	8.95	1.18	1.53	4.88	12.80
5570.00	10.90	11.14	11.12	9.40	9.27	9.30	1.20	1.42	4.96	12.39
6000.00	10.48	10.71	10.69	9.76	9.64	9.67	1.28	1.40	5.03	12.04

