



Model: PS-3000-4N

Description:..... 4-Way Power Divider

Operating Frequency:..... 20-3000 MHz

Insertion Loss / Amplitude Balance / Phase Balance:


Frequency	Insertion Loss	Ampl. Bal	Phase Bal.
20 - 2000 MHz	1.5 dB Max	±0.1 dB Max	±1° Max
2000 – 3000 MHz	2.4 dB Max	±0.2 dB Max	±1.5° Max

VSWR:..... Sum Port..... 1.5:1 Max
 Output Ports 1.55:1 Max (Over 20-50MHz)
 Output Ports 1.5:1 Max (Over 50-3000MHz)
 Isolation:..... 18dB Min
 Power Handling (@ SUM-Port):..... Load VSWR=∞ 2W AVG/CW Max
 Load VSWR <2:1 8W AVG/CW Max
 Connectors:..... N (f)
 Impedance:..... 50 Ohms Nominal
 Quality:..... Best-Commercial-Grade

Environmental Ratings:

Temperature:..... {Operating: -55°C to +95°C} & {Storage: -60°C to +110°C}
 Humidity:..... MIL-STD-202F, Method 103B Cond. B (96 hours at 95% R.H.)
 Shock:..... MIL-STD-202F, Method 213B, Cond. B (75G, 6mSec)
 Vibration:..... MIL-STD-202F, Method 204D, Cond. B (.06" double amplitude, or 15G)
 Altitude:..... MIL-STD-202F, Method 105C, Cond. B (50,000 Feet)
 Temp. Shock:..... MIL-STD-202F, Method 107D, Cond. A (5 cycles)

Outline

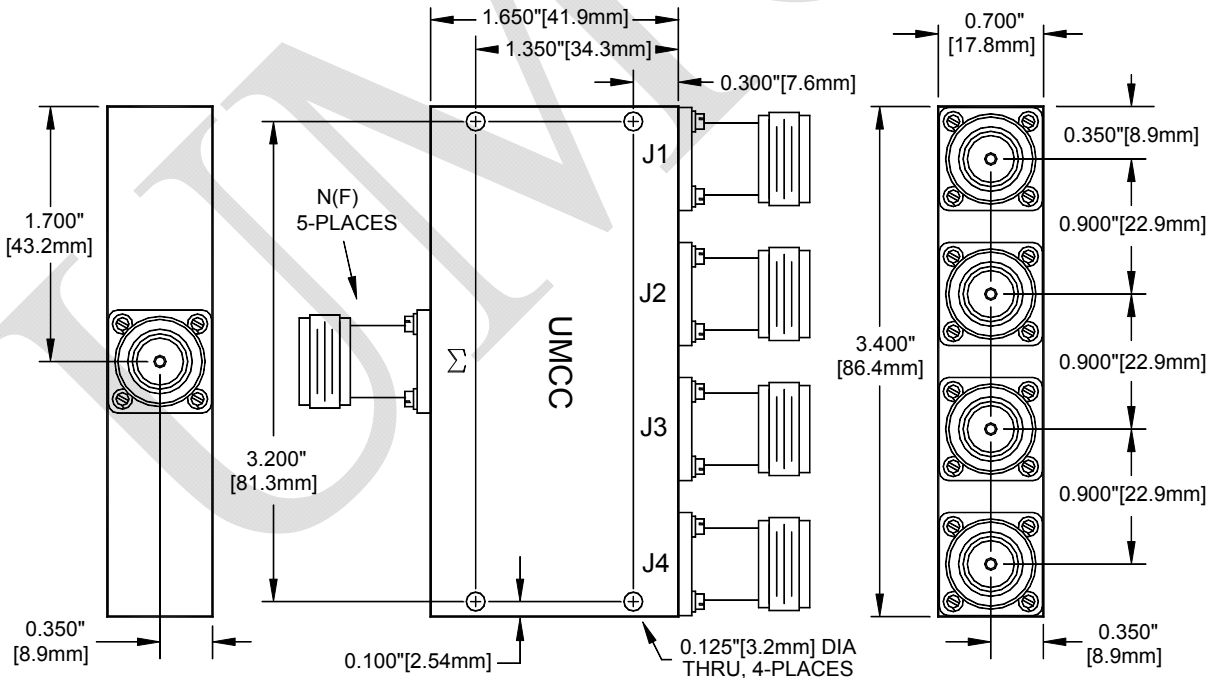

Weight

5.8 oz [164.4 g]