

KR Electronics

General Description


KR 2810 is a 70 MHz bandpass filter. The filter has a 3 dB bandwidth of 40 MHz. Other center frequencies and bandwidths available. Please consult the factory.

Features


- Sharp Transition to Stopband
- >40 dB Stopband
- 50 Ω Source and Load
- SMA Connectors

Typical Performance

Passband Amplitude & Group Delay
(1 dB/div & 20 nsec/div)

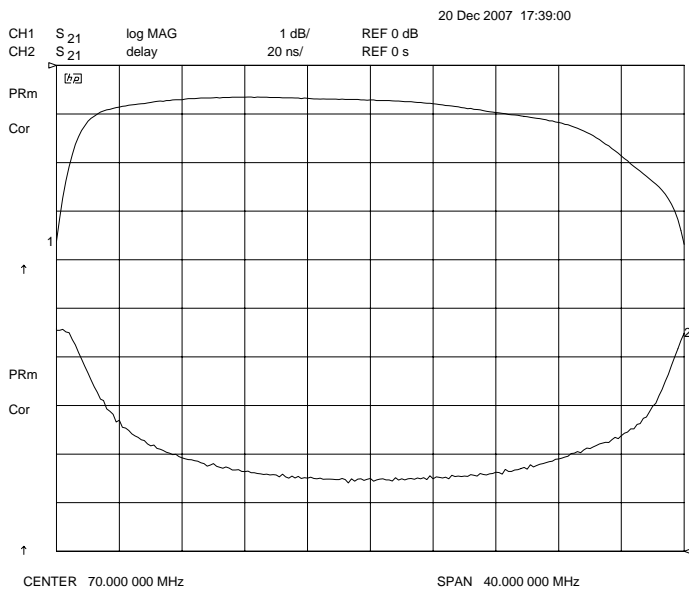

Overall Response
(10 dB/div)

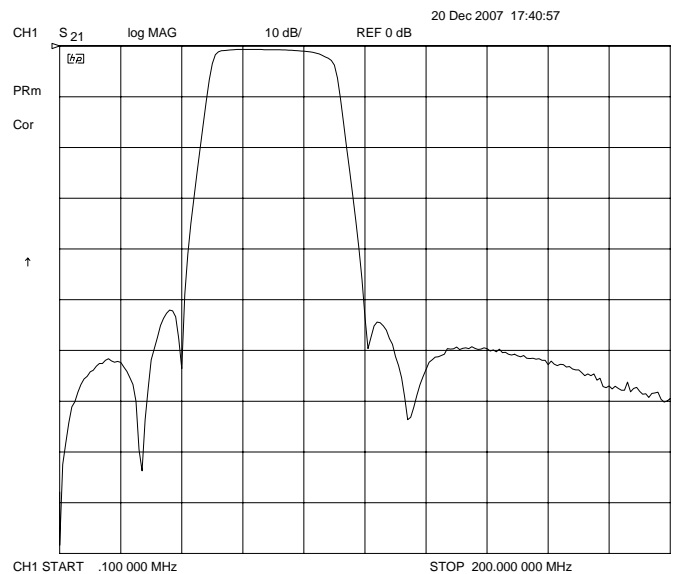

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001


Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR 2810 Bandpass

Specifications

Parameter	Specification
Filter type	Bandpass
Center Frequency	70 MHz
Insertion Loss	< 1.5 dB (0.7 dB typical)
3 dB Bandwidth	40 MHz
Attenuation 40 MHz	> 40 dB (>50 dB typical)
Attenuation 100 MHz	> 40 dB (>50 dB typical)
Source and Load	50 Ω

Physical Dimensions

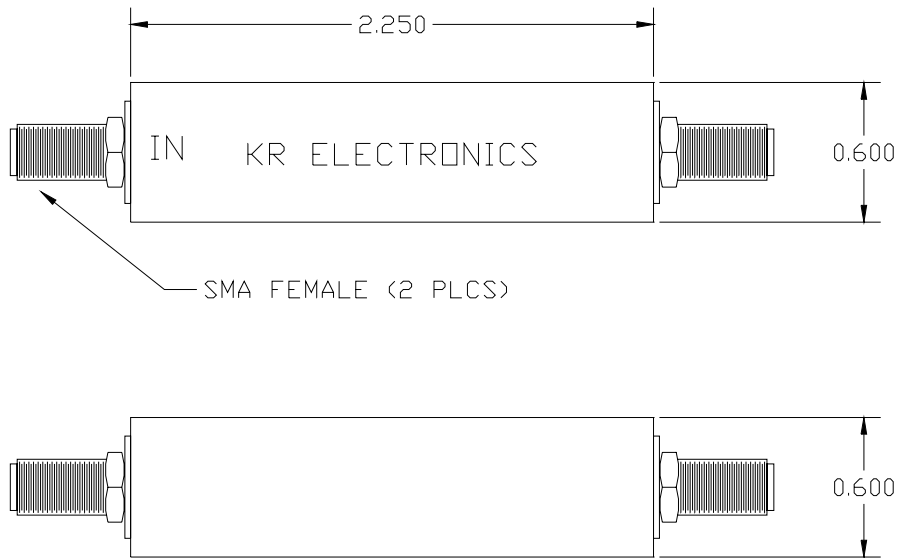

Dimensions in inches
Metal Case
Also available in surface mount package